


D1 mini

A mini wifi board with 4MB flash based on ESP-8266EX.

- Get started in Arduino
- Driver
- Buy Now

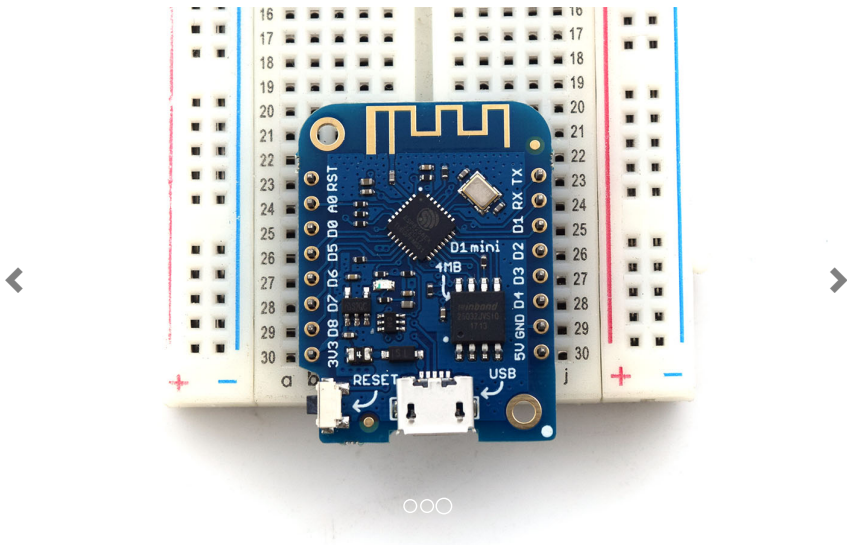

Features

- 11 digital input/output pins, all pins have interrupt/pwm/I2C/one-wire supported(except D0)
- 1 analog input(3.2V max input)
- a Micro USB connection
- Compatible with Arduino
- Compatible with nodemcu
- Compatible with MicroPython

Tutorials

- Get started in Arduino
- Get started in NodeMCU
- Revert to the Factory Firmware (AT)

Documentation

- Schematic V3.0.0
- Driver

Technical specs

Microcontroller	ESP-8266EX
Operating Voltage	3.3V
Digital I/O Pins	11
Analog Input Pins	1(Max input: 3.2V)

Microcontroller	ESP-8266EX
Clock Speed	80MHz/160MHz
Flash	4M bytes
Length	34.2mm
Width	25.6mm
Weight	3g

Pin

Pin	Function	ESP-8266 Pin
TX	TXD	TXD
RX	RXD	RXD
A0	Analog input, max 3.3V input	A0
D0	IO	GPIO16
D1	IO, SCL	GPIO5
D2	IO, SDA	GPIO4
D3	IO, 10k Pull-up	GPIO0
D4	IO, 10k Pull-up, BUILTIN_LED	GPIO2
D5	IO, SCK	GPIO14
D6	IO, MISO	GPIO12
D7	IO, MOSI	GPIO13
D8	IO, 10k Pull-down, SS	GPIO15
G	Ground	GND
5V	5V	-
3V3	3.3V	3.3V
RST	Reset	RST

All of the IO pins have interrupt/pwm/I2C/one-wire support except D0.

All of the IO pins run at 3.3V.

Version

- **V3.1.0(current)**
- V3.0.0
- V2.3.0
- V2.2.0