


FOUNDATION&PLINTH BEAM PLAN OF CARE TAKER&C.S.C ROOM

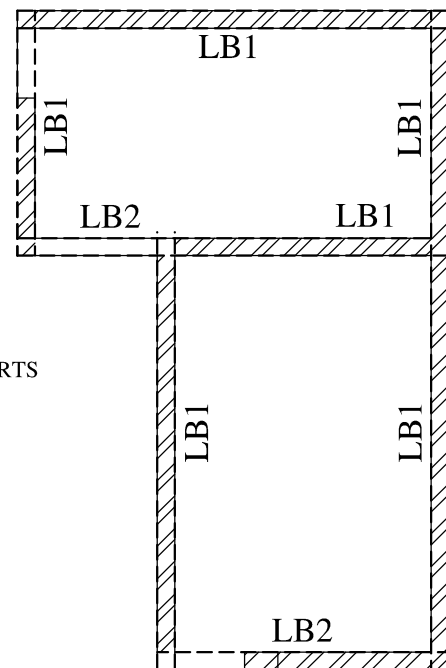

A rectangular array of 6 dots arranged in 2 rows and 3 columns. The array is labeled with dimensions 9 inches by 6 inches. The top row is labeled 4, 5, 6 and the bottom row is labeled 1, 2, 3.

A diagram showing a 9x9 grid. The top and left dimensions are labeled as 9". A 5x5 subgrid is highlighted with a thick border. The columns of the subgrid are numbered 5, 6, 7, 8 at the top, and the rows are numbered 1, 2, 3, 4 at the left. There are dots at the intersections of the subgrid lines.

SCHEDULE OF BARS				
1	A	100 TOR STEEL @ 12" C/C STRAIGHT BAR AT BOTTOM FACE		
2	B	100 TOR STEEL @ 12" C/C CRANKED BAR		
3	C	120 TOR STEEL @ 12" EXTRA BAR AT TOP FACE		
4	D	100 TOR STEEL @ 14" STRAIGHT BAR AT BOTTOM FACE		
5	E	100 TOR STEEL @ 14" CRANKED BAR		
6	F	100 TOR STEEL @ 14" EXTRA BAR AT TOP FACE		
NOTES:-				
* IF THERE IS ANY DISCREPANCY REGARDING DIMENSIONS, ARCHITECTURAL DRAWINGS MAY BE CONSULTED. * WRITTEN DIMENSIONS SHOULD BE FOLLOWED. * DRAWING IS NOT TO BE SCALED. * M-20 (1:1½:3) GRADE CONCRETE TO BE USED IN ALL CONCRETE WORKS. * Ø TOR MEANS DIAMETER IN MM FOR TOR STEEL BARS. * STEEL SHUTTERING IS TO BE USED FOR ALL CONCRETE WORKS. * LEAN CONCRETE WILL BE 4" TH. IN MIX 1:4:8. * LEAN CONCRETE WILL PROJECT 3" BEYOND THE R.C.C FOUNDATION. * COVER TO REINFORCEMENT OF COLUMNS WILL BE 1½" ON ALL FACES. * COVER TO REINFORCEMENT OF FOUNDATION SLAB WILL BE 2". * DEVELOPMENT LENGTH(L _d) OF STEEL IS 57 TIMES THE DIAMETER OF THE BAR. * CEMENT MORTAR RATIO IN 9" TH. BRICK WORK IS 1:6. * CEMENT MORTAR RATIO IN 4½" TH. BRICK WORK IS 1:4. * WHEREVER THE GAP BETWEEN TWO FOOTINGS IS LESS THAN 900mm, THE LEAN CONCRETE (P.C.C) SHALL BE LAID CONTINUOUSLY. * EARTH FILLING IN FOUNDATIONS SHOULD BE DONE EQUALLY ON BOTH SIDES OF FOUNDATION WALL. * WHEREVER PLINTH BEAM LIES DIRECTLY ON EARTH, P.C.C 4" THICK (1:4:8) MAY BE LAID. * STEEL BARS OF PLINTH BEAMS SHALL BE L-SHAPED OVER LAPED BY A LENGTH OF 57 TIMES THE DIAMETER OF THE BARS AT ALL CORNERS & JUNCTIONS. * NOT MORE THAN 50% BARS SHALL BE SPLICED AT ONE SECTION.				
ENGINEER :-				
CLIENT :- XEN PANCHAYATI RAJ, NUH				
PROJECT :-				
STRUCTURAL DRAWINGS OF PANCHYAT GHAR AT VILLAGE GHASERA, DISTT. NUH				
TITLE :-				
CARE TAKER & C.S.C ROOM				
SUB TITLE :- FOUNDATION PLAN & PLINTH BEAM PLAN & DETAIL			DRG. NO. :- JC/PR/NUH/2420/8	
SCALE :- 1 : 100	DATE :- 9 July 2022	DRAWN BY :- SIMRAN	DSN BY :- JASBIR	CKD. BY :- K.B. MANOCHA
 JC TECHNOCRATS PVT. LTD (Formerly known as Jindals Consortium, Since 1990) STRUCTURAL ENGINEERS, HIGHWAY & BRIDGE DESIGNERS, PROJECT MANAGEMENT CONSULTANTS ROAD SAFETY AUDITORS, PROOF CONSULTANTS, SUPERVISORS AND SOIL INVESTIGATORS HEAD OFFICE :- C-9, VIKAS VIHAR, AMBALA CITY - 15003, HARYANA. TEL: 0171-2558913, MOB: +91-9896670914 DELHI :- #478, GREEN VIEW APARTMENTS, SECTOR 19, POCKET-2, DWARKA, NEW DELHI. MOB: +91-9996170914 TEL: 8199907005, 989650913, e-mail: jindalstructure@gmail.com, jindals13@gmail.com, Web: www.jindalsconsortium.com				