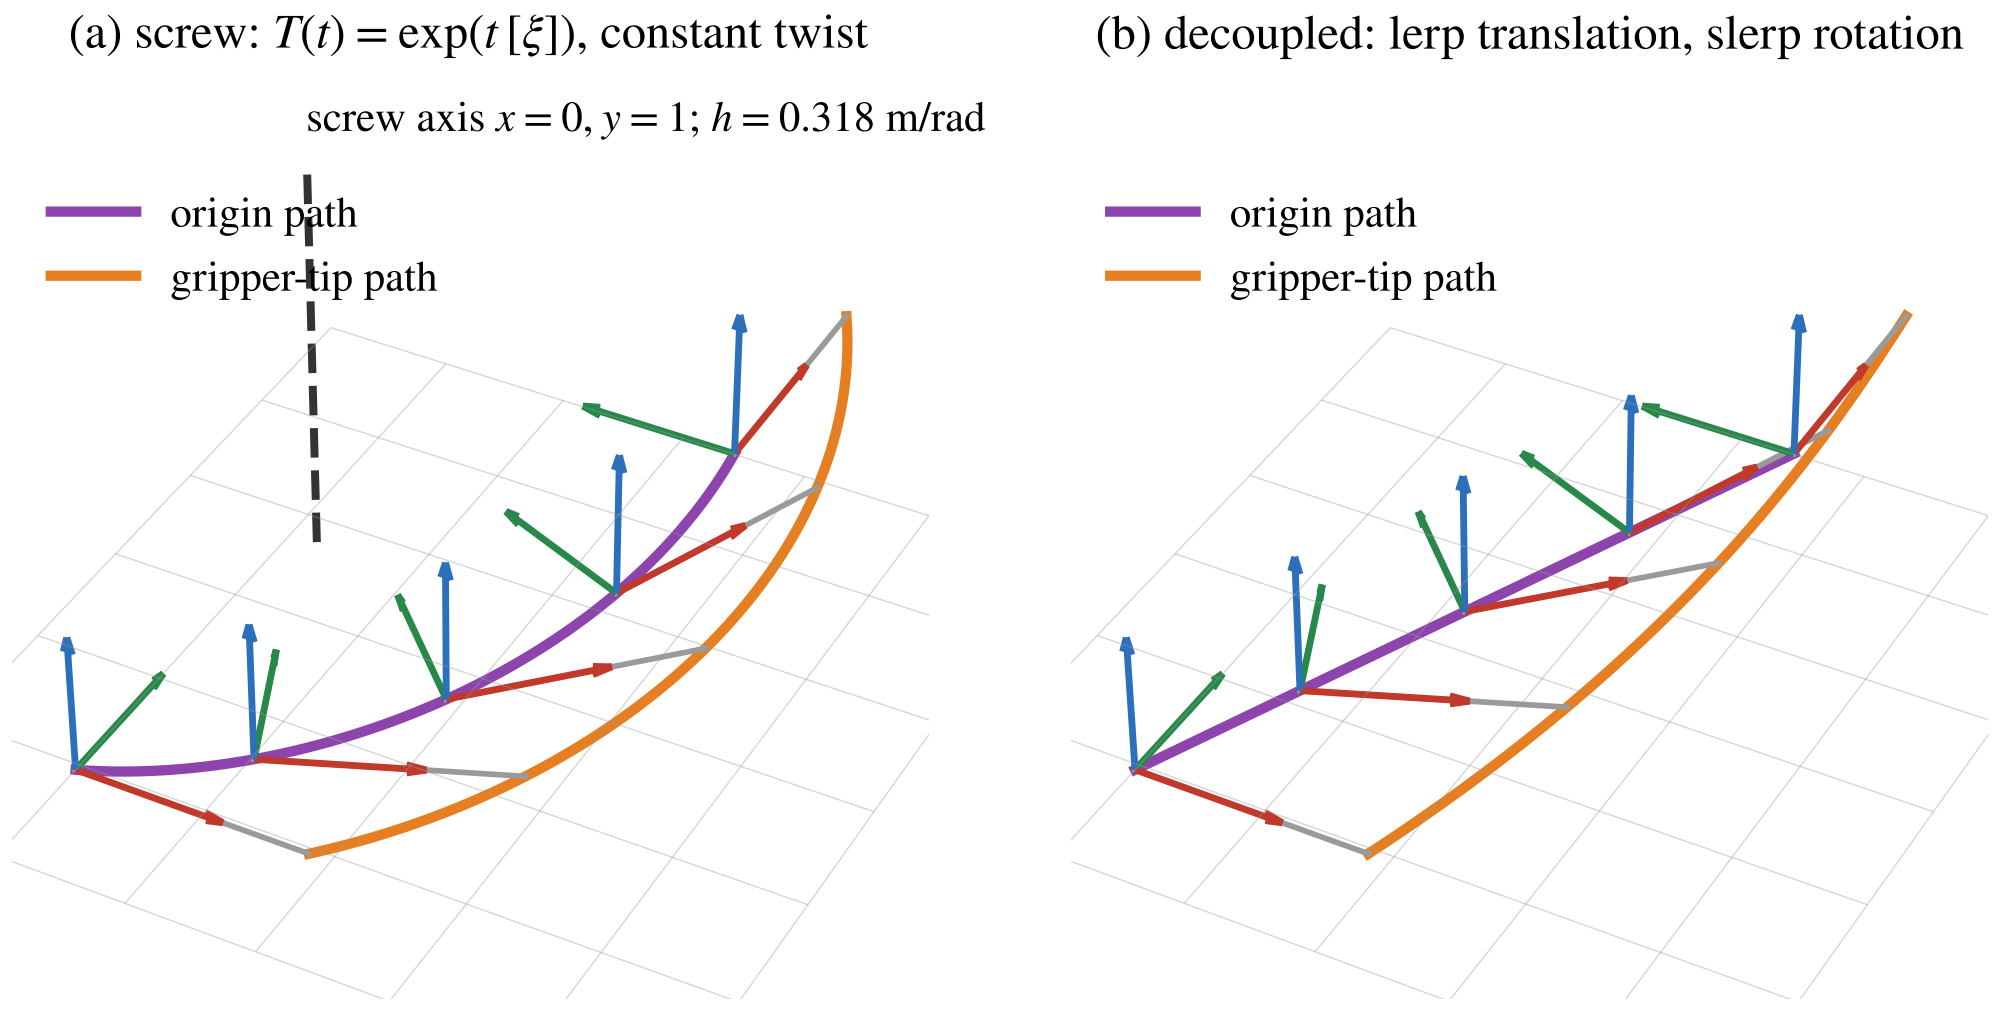
(a) screw: $T(t) = \exp(t\,[\xi])$, constant twist
screw axis $x = 0, y = 1$; $h = 0.318$ m/rad
origin path
gripper-tip path
(b) decoupled: lerp translation, slerp rotation
origin path
gripper-tip path