

A Power: Rc–C 24 VAC (TPS54360B buck) or USB-C 5 V in; USB-C 5 V out to the display




B Rc–V Rh to the output switches

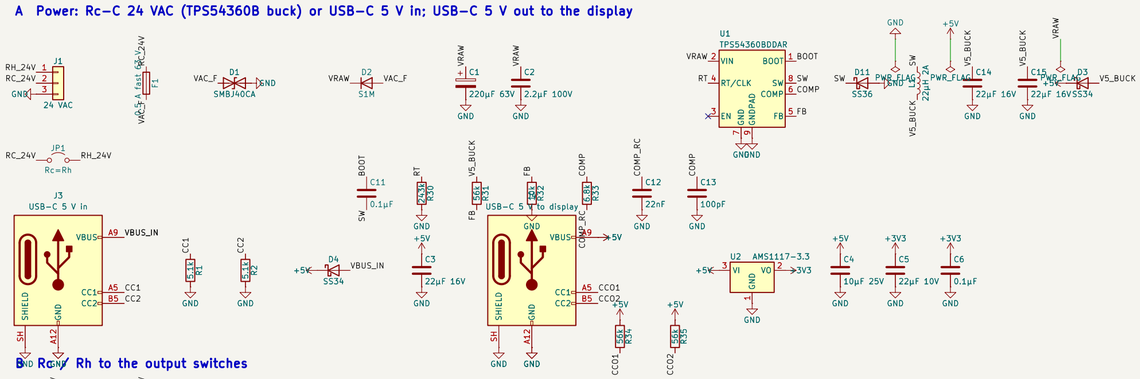


C Outputs (PhotoMOS) and read-back (H11AA1): G Y1 Y2 W1 W2 O/B

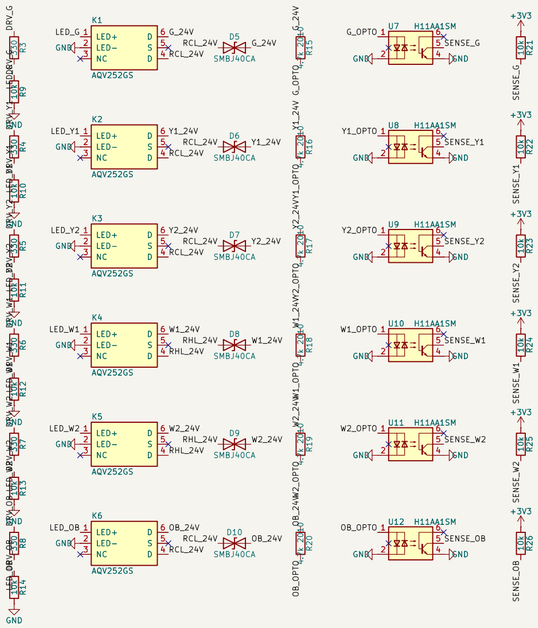


D I/O expander + watchdog (all outputs off on reset)

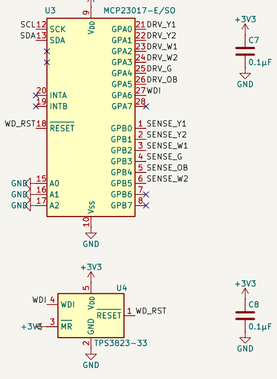

E LoRa: I2C–SPI bridge + Wio-SX1262

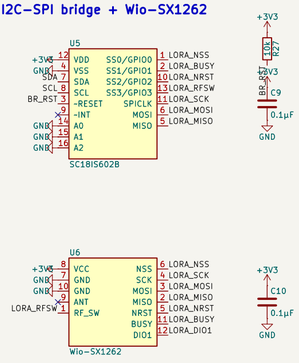

F Display board and room sensor



Mounting



Labels with the same name are connected
Fullscope display thermostat carrier; parts and nets in design.py

HVAC_Monitor

Sheet: /
File: thermostat-carrier.kicad_sch

Title: *Fullscope thermostat carrier*

Size: A2	Date: 2026-10-30	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1