

A Power: Rc–C 24 VAC or USB–C 5 V; USB–A 5 V to the display




B Rc / Rh to the output switches

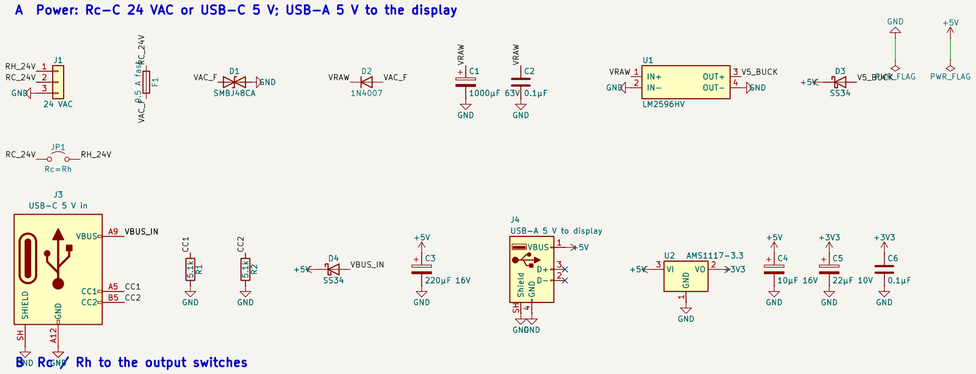

C Outputs (PhotoMOS) and read–back (H11AA1): G Y1 Y2 W1 W2 O/B

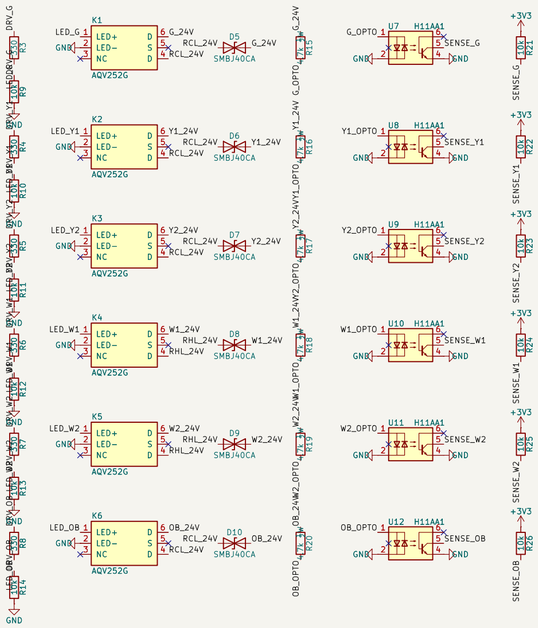


D I/O expander + watchdog (all outputs off on reset)

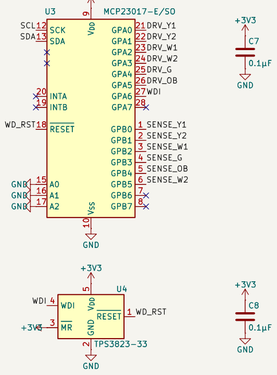

E LoRa: I2C–SPI bridge + Wio–SX1262

F Display board and room sensor



Mounting



Labels with the same name are connected
Fullscope display thermostat carrier; parts and nets in design.py

HVAC_Monitor

Sheet: /
File: thermostat–carrier.kicad_sch

Title: Fullscope thermostat carrier

Size: A2	Date: 2026–10–29	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1