

U_Battery Circuit
Battery Circuit.SchDoc




900mil breadboard spacing


U_BME280
BME280.SchDoc




U_MCU
MCU.SchDoc

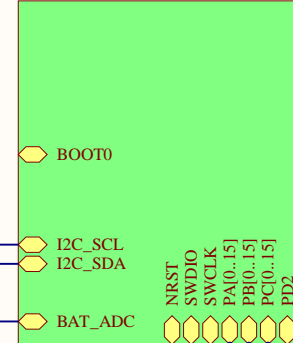

U_SX1276
SX1276.SchDoc



U_Connectors
Connectors.SchDoc



Project: **STM32 LoRa Node**

File: Top.SchDoc


Size: A4


Author: Leon Baždar


Revision: V1.0

Date: 7.1.2021.

Sheet 1 of 6



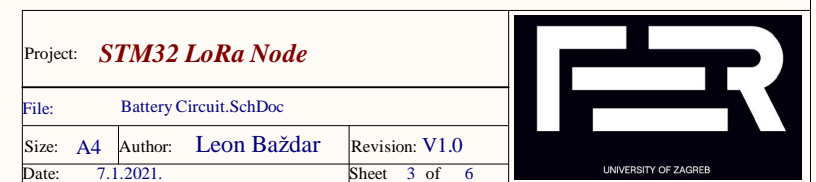

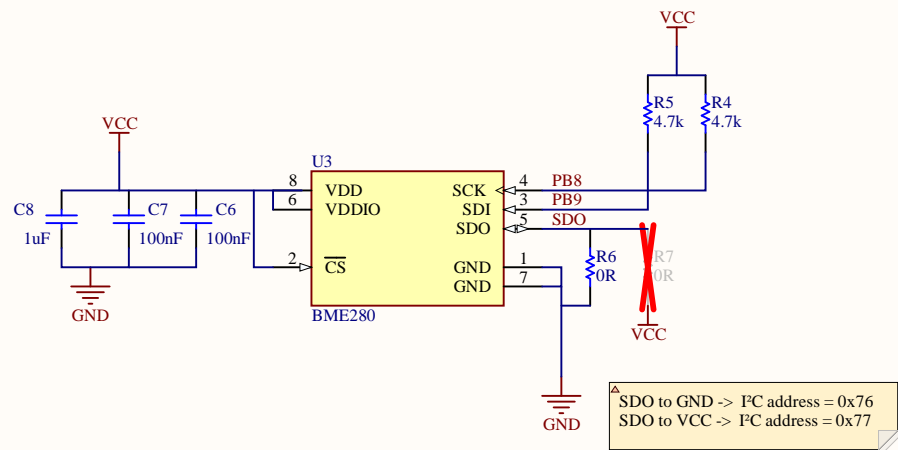






Project: **STM32 LoRa Node**

File: BME280.SchDoc

Size: A4 Author: Leon Baždar Revision: V1.0

Date: 7.1.2021. Sheet 4 of 6



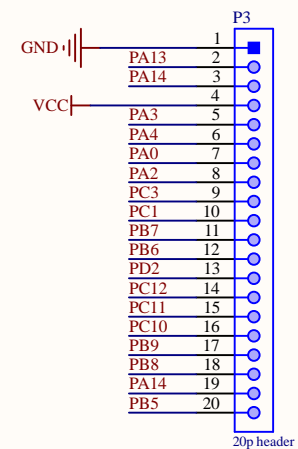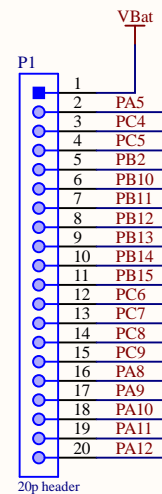


Project: **STM32 LoRa Node**

File: Connectors.SchDoc

Size: A4 Author: Leon Baždar Revision: V1.0

Date: 7.1.2021. Sheet 5 of 6



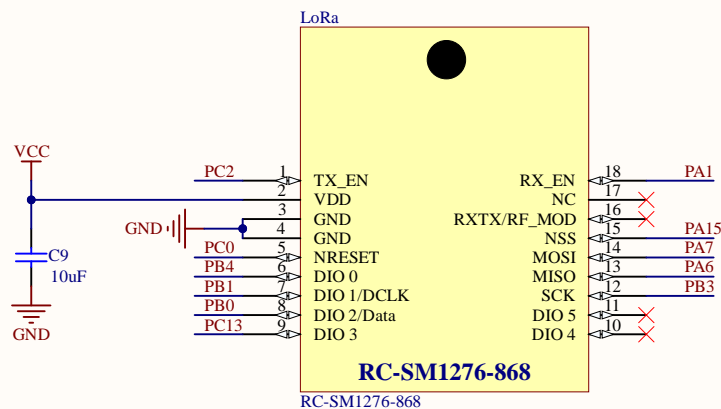

```
"lora-spi-mosi": "PA_7",  
"lora-spi-miso": "PA_6",  
"lora-spi-sclk": "PB_3",  
"lora-cs": "PA_15",  
"lora-reset": "PC_0",  
"lora-dio0": "PB_4",  
"lora-dio1": "PB_1",  
"lora-dio2": "PB_0",  
"lora-dio3": "PC_13",  
"lora-dio4": "NC",  
"lora-dio5": "NC",  
"lora-rf-switch-ctl1": "NC",  
"lora-rf-switch-ctl2": "NC",  
"lora-txctl": "PC_2",  
"lora-rxctl": "PA_1",  
"lora-ant-switch": "NC",  
"lora-pwr-amp-ctl": "PC_1",  
"lora-tcxo": "PA_12"
```


Project: **STM32 LoRa Node**

File: SX1276.SchDoc

Size: A4 Author: Leon Baždar Revision: V1.0

Date: 7.1.2021. Sheet 6 of 6



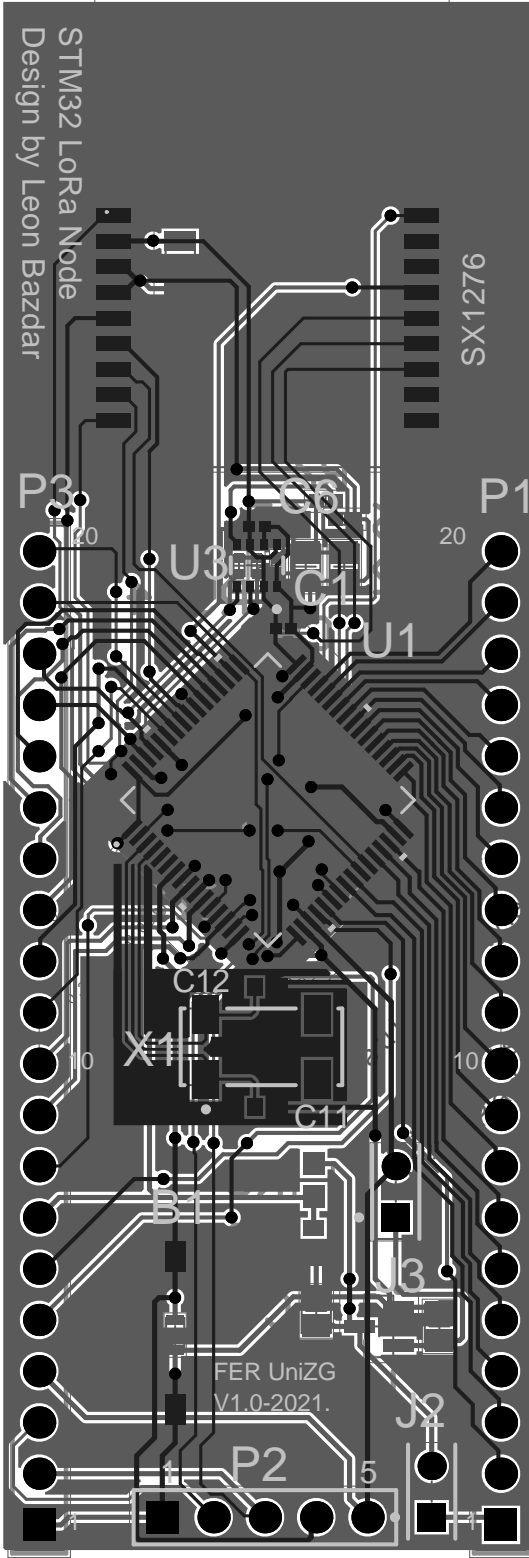

style: OX60Y90D30P
style: OX90Y60D30P
RX47Y12D0T

Comment	Description	Designator	Footprint	LibRef	Quantity	Part Number	PartNumber	Case Code (Imperial)	Package / Case	Datasheet URL
PushButton 3x6x2.5 SMD		B1	PushButton 3x6x2.5 SMD-Footprint-1	CMP-011-00013-4	1					
100nF		C1, C6, C7	CAPC1005X56X25LL10 T15	CMP-2008-02842-1	3	0402YD104KAT2A				
1uF		C2, C4, C5, C8	CAPC2013X145X50LL2 0T25	CMP-2007-01016-1	4	C0805C105K4PAC TU				
10uF	Multilayer Ceramic Chip Capacitor, 10 uF, +/- 10%, 10 V, -55 to 125 degC, 0805 (2012 Metric), RoHS, Tape and Reel	C3, C9	CAPC2013X145X20ML 20	CMP-2000-05452-1	2				0805(2012Metric)	http://download.siliconexpert.com/pdfs/2015/4/21/15/54/45/779/tdk_/manual/37024850441143360mlcc_commercial_general_en.pdf
100nF	Chip Capacitor, 0.1 uF, +/- 10%, 50 V, -55 to 125 degC, 0603 (1608 Metric), RoHS, Tape and Reel	C10	CAPC1608X90X20LL10	CMP-2000-07546-1	1			0603		https://product.tdk.com/info/en/catalog/datasheets/mlcc_automotive_general_en.pdf
4.3pF		C11, C12	CAPC1608X90X35LL10 T15	CMP-2006-02448-1	2	GOM1885C2A4R3 BB01D				
1nF		C13	CAPC1005X55X25LL05 T05	CMP-2008-01229-1	1	VJ0402Y102KXXC W1BC				
BAT current	Male Header, Pitch 2.54 mm, 1 x 2 Position, Height 8.21 mm, Tail Length 3.05 mm, -65 to 105 degC, RoHS, Bulk	J2	TECO-5-146280-2_V	CMP-2000-07492-1	1					http://www.te.com/commerce/DocumentDelivery/DDEController?Action=showdoc&DocId=Customer+Drawing%7F146280%7FH1%7Fpdf%7FEngl ish%7FENG_CD_1 46280_H1.pdf%7F 5-146280-2
DEV CUR	Male Header, Pitch 2.54 mm, 1 x 2 Position, Height 8.21 mm, Tail Length 3.05 mm, -65 to 105 degC, RoHS, Bulk	J3	TECO-5-146280-2_V	CMP-2000-07492-1	1					http://www.te.com/commerce/DocumentDelivery/DDEController?Action=showdoc&DocId=Customer+Drawing%7F146280%7FH1%7Fpdf%7FEngl ish%7FENG_CD_1 46280_H1.pdf%7F 5-146280-2
RC-SM1276-868	https://www.radiocontrolli.com/it/componente/97/rc-sm1276-868	LoRa	RC-SM1276-868	CMP-021-00007-1	1					
20p header	THT Vertical Pin Header WR-PHD, Pitch 2.54 mm, Single Row, 20 pins	P1, P3	61302011121	CMP-1502-01102-1	2	61302011121				https://katalog.weonline.de/em/datasheet/6130xx11121.pdf
SWD header 2.54	THT Vertical Pin Header WR-PHD, Pitch 2.54 mm, Single Row, 5 pins	P2	61300511121	CMP-1502-01068-1	1	61300511121				https://katalog.weonline.de/em/datasheet/6130xx11121.pdf
100K	Chip Resistor, 100 KOhm, +/- 1%, 0.63 W, -55 to 155 degC, 0402 (1005 Metric), RoHS, Tape and Reel	R3	RESC1005X40X25ML0 5T05	CMP-2002-08123-2	1			0402		
4.7k	Chip Resistor, 4.7 KOhm, +/- 1%, 0.1 W, -55 to 155 degC, 0402 (1005 Metric), RoHS, Tape and Reel	R4, R5	RESC1005X40X25LL05 T05	CMP-1665-00031-3	2		ERJ-2RKF4701X	0402		
0R		R6	RESC1005X40X25ML0 5T10	CMP-2002-08060-1	1	RC0402JR-130RL				
1.2MΩ	RES Thick Film, 1.2MΩ, 1%, 0.1W, 100ppm/°C, 0603	R8	FP-CRCW0603-e3-IPC_A	CMP-2000-03023-2	1			0603		
3.24MΩ	RES Thick Film, 3.24MΩ, 1%, 0.1W, 100ppm/°C, 0603	R9	FP-CRCW0603-e3-MFG	CMP-2000-03317-2	1			0603		
STM32L072RZT6	No Description Available	U1	LQFP64-10x10mm		1					
MCPI700T-3302E/TT	Low Quiescent Current LDO, 3-Pin SOT-23, Extended Temperature, Tape and Reel	U2	SOT-23-TT3_N	CMP-0136-00791-1	1					
BME280	SENSOR PRESSURE HUMIDITY TEMP	U3	FP-BME280-MFG	CMP-191074-000001-1	1					
ABS25-32.768KHZ-6-T	Low Frequency Crystal, 32.768 KHz, 6 pF, +/- 20 ppm, -40 to 85 degC, 4-Pin SMD, RoHS, Tape and Reel	X1	ABRA-ABS25-4_V	CMP-2000-05036-1	1				8mmx3.8mm	https://datasheet.civa.com/854/abs25-854528.pdf