




DRAFT STOP ACCESS DOOR FOR ATTIC APPLICATION

DRD


INSTALLATION: WALLS ONLY

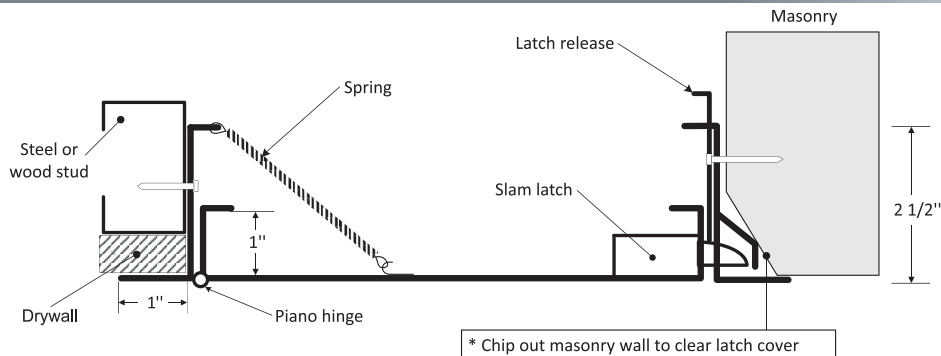

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
22 x 30 (558 x 762)	1	22	10
22 x 36 (558 x 914)	2	24	10.9
24 x 36 (609 x 914)	2	29	12.2
24 x 48 (609 x 914)	2	37	16.8
24 x 60 (609 x 1524)	2	44	20
30 x 30 (762 x 762)	1	30	13.6
36 x 36 (914 x 914)	2	39	17.7
36 x 48 (914 x 1219)	2	49	22.2
Rough wall opening is door size + 1/4" or + 6mm			
Your odd sizes: Made in 5 days			

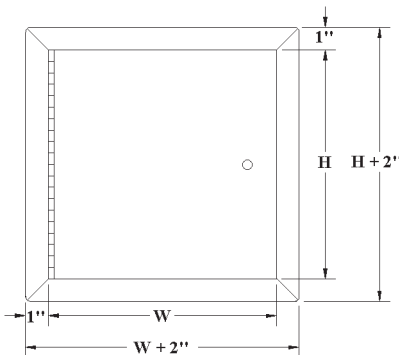

DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel

Hinge: continuous piano hinge

Lock / latch: self latching tool-key operated latch and/or ring operated latch, both included

Inside panel release: standard on all doors

Automatic panel closer: standard on all doors

Finish: high quality white powder coat primer

Packaging: individually wrapped, 1 per box

POPULAR OPTIONS

Material: stainless steel 304 #4 (brushed finish)

Lock / latch: key operated cylinder cam latch, handle operated slam latch, mortise preparation for cylinder (cylinder optional), mortise deadbolt lock

Gasketing: neoprene gasket

For complete list of options go to: www.cendrex.com

CENDREX PARTNERS



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

HEAD OFFICE: 11 303, 26th avenue, Montreal, Quebec, Canada H1E 6N6

WAREHOUSES: California, Colorado, Florida, Illinois, Pennsylvania, Texas

Tel.: 514 493-1489 - 1 800 479-1489

Fax: 514 493-1992 - 1 800 297-1489

www.cendrex.com

info@cendrex.com