


## **FLUSH ALUMINUM FLOOR HATCH**

# **PPA**

#### **INSTALLATION**

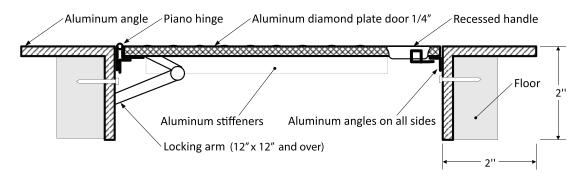


### **DIMENSIONS AND APPEARANCE**

LEED ready: This product contributes to LEED® credits.

HATCH SIZE - W x H	NUMBER	WEIGHT				
INCHES (MM)	OF LOCKS	LBS	KG			
24 x 24 (609 x 609)	1	35	15.9			
24 x 36 (609 x 914)	1	44	20			
Rough floor opening is door size + 1/2" or + 13mm						

Your odd sizes: Made in 5 days

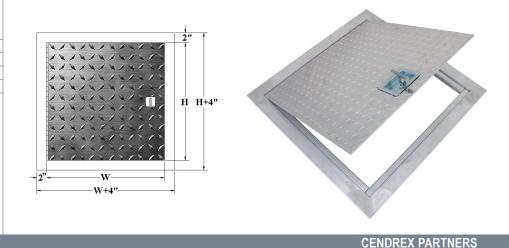

#### **DESCRIPTION AND MATERIAL SPECIFICATION**

Material: DOOR: aluminum diamond plate 1/4"

FRAME: 2" x 2" x 1/4" aluminum angle

Hinge: heavy duty aluminum continuous

piano hinge (0.080")

Lock / latch: recessed handle operated cam latch

POPULAR For complete list of options OPTIONS go to: <a href="https://www.cendrex.com">www.cendrex.com</a>

Lock / latch: Key operated recessed handle cam Latch

**Recess**: recessed floor hatch optional - see PPA-RE model

Caution: The PPA floor access door is designed to support a

live load of 300 pounds/sq foot and includes a hold open arm to keep the door in an open position.





#### **PROJECT DATA**

PROJECT NAME:	QTY	W	Н	OPTIONS		
ARCHITECT:						
DEALER:						
CONTRACTOR:						
LOCATION:	SPECIAL INSTRUCTIONS:					
DATE:						
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)					

**HEAD OFFICE**: 11 303, 26th avenue, Montreal, Quebec, Canada H1E 6N6 **WAREHOUSES**: California, Colorado, Florida, Illinois, Pennsylvania, Texas

Tel.: 514 493-1489 - 1 800 479-1489 Fax: 514 493-1992 - 1 800 297-1489 www.cendrex.com info@cendrex.com