




RECESSED ACCESS DOOR WITH PLASTER FLANGE

AHA-PLY


INSTALLATION

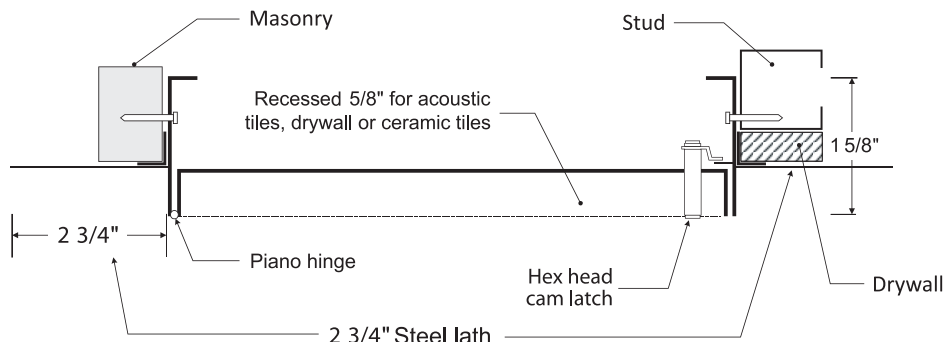

DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	3	1.4
12 x 12 (304 x 304)	1	5	2.3
16 x 16 (406 x 406)	1	9	4.1
18 x 18 (457 x 457)	1	11	5
24 x 24 (609 x 609)	1	16	7.3
Rough wall opening is door size + 1/4" or + 6mm			
Your odd sizes: Made in 5 days			

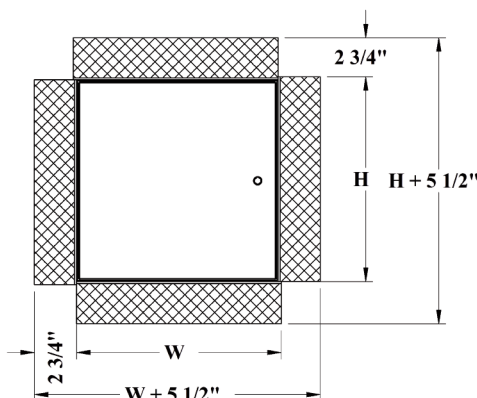

DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel

Hinge: continuous piano hinge

Lock / latch: Allen hex head cam latch

Finish: high quality white powder coat primer

Packaging: individually wrapped, 1 per box

Recess: 5/8" standard

POPULAR OPTIONS

For complete list of options
go to: www.cendrex.com

Latch: key operated cylinder cam latch

Material: stainless steel 304 #4 (brushed finish)

Recess: 1/2" to 3/4" (standard 2" frame)
13/16" to 1 1/2" (special 3" frame)

CENDREX PARTNERS



PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

HEAD OFFICE: 11 303, 26th avenue, Montreal, Quebec, Canada H1E 6N6

WAREHOUSES: California, Colorado, Florida, Illinois, Pennsylvania, Texas

Tel.: 514 493-1489 - 1 800 479-1489

Fax: 514 493-1992 - 1 800 297-1489

www.cendrex.com

info@cendrex.com