


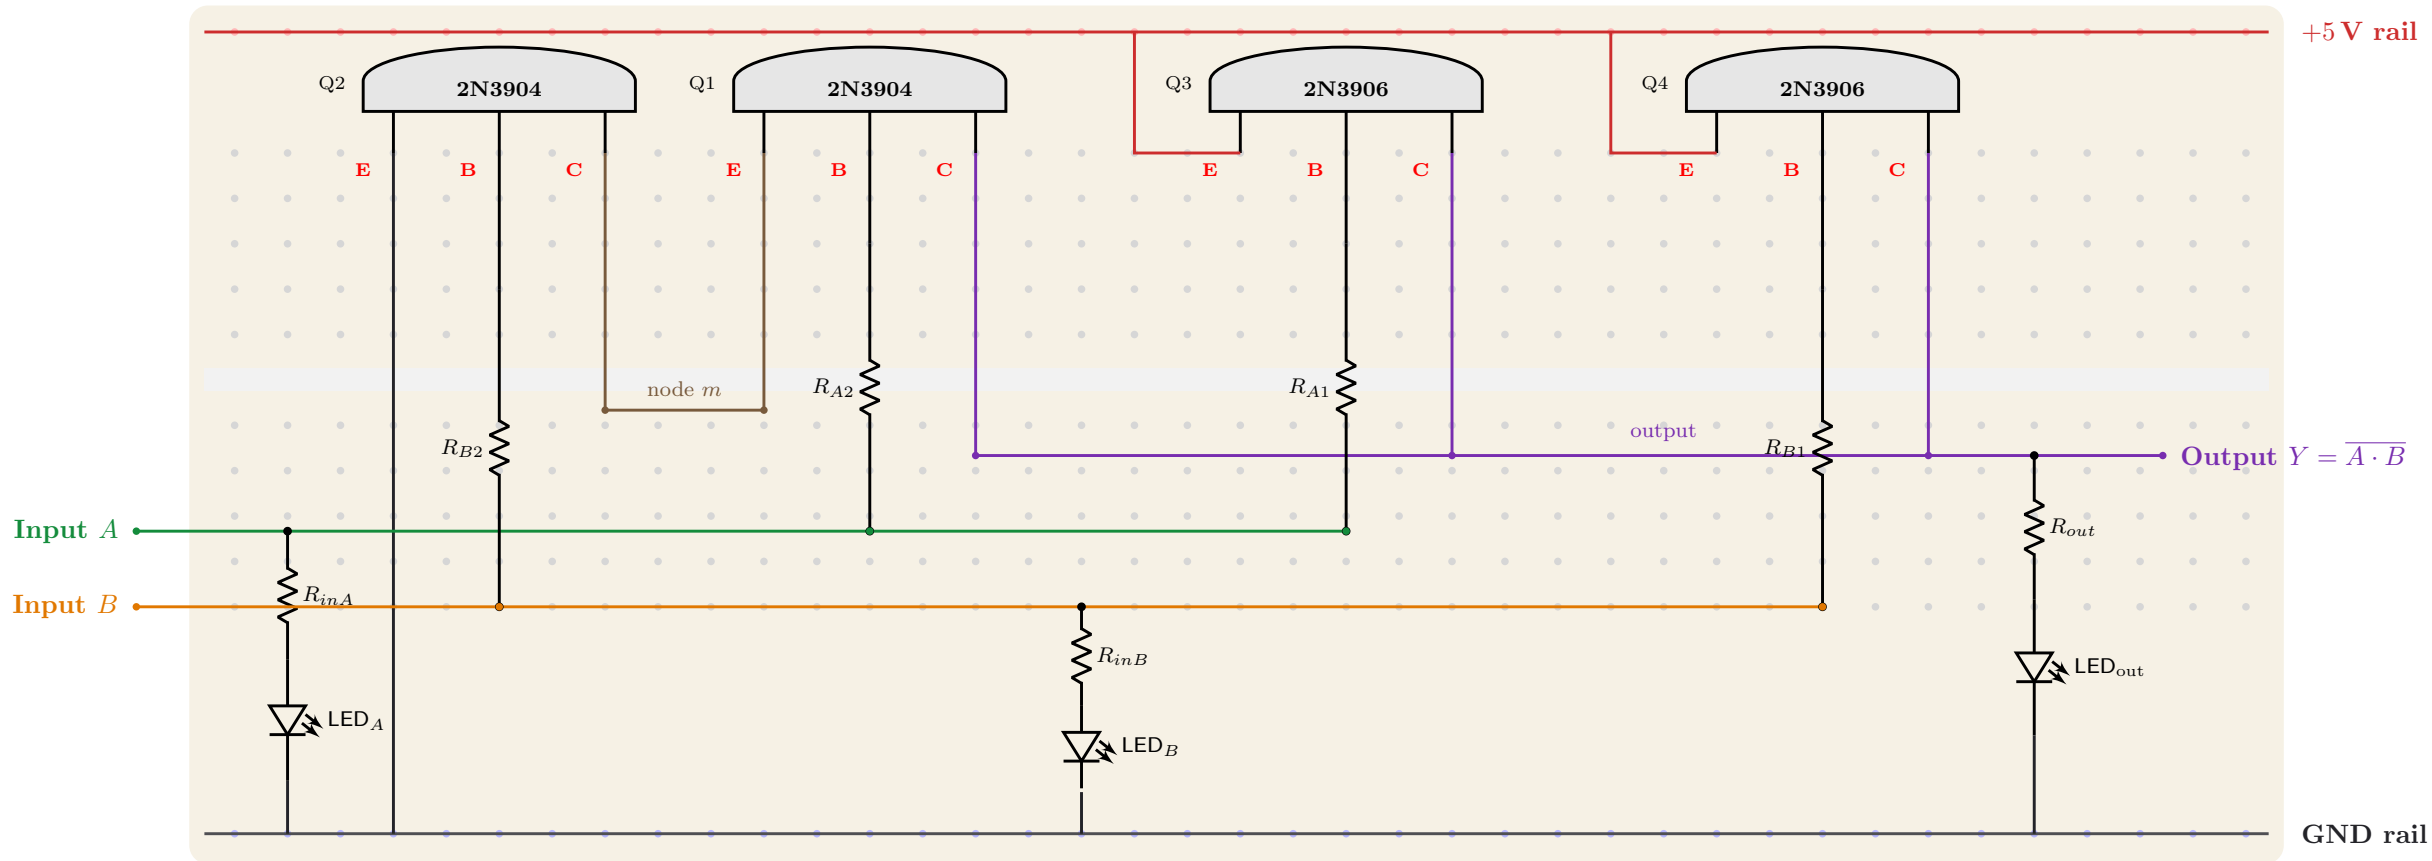

Wires: +5 V, GND, A, B, output, m (Q1 E–Q2 C)

Each column of five holes in a bank is one node; legs are E B C, left to right.