



Computer_Networks_CSA0716_LAB OUTPUTS


EXPERIMENT-2: IMPLEMENTATION OF STAR TOPOLOGY USING PACKET TRACER

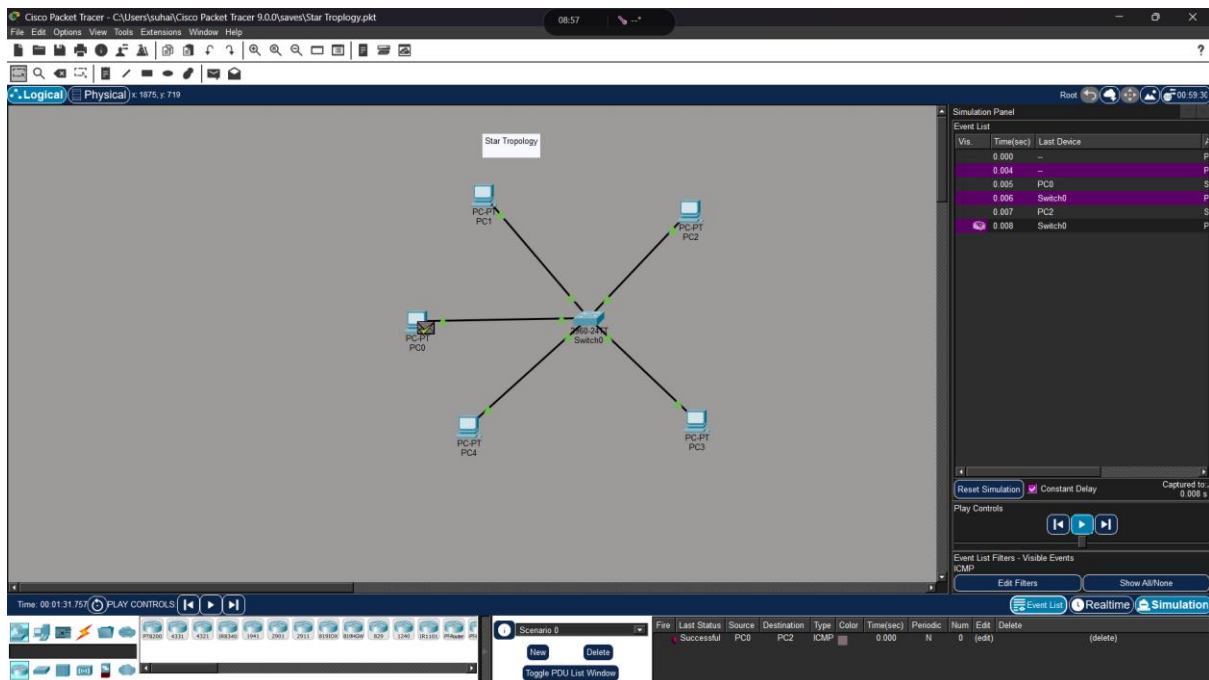


EXPERIMENT-3: IMPLEMENTATION OF BUS TOPOLOGY USING PACKET TRACER

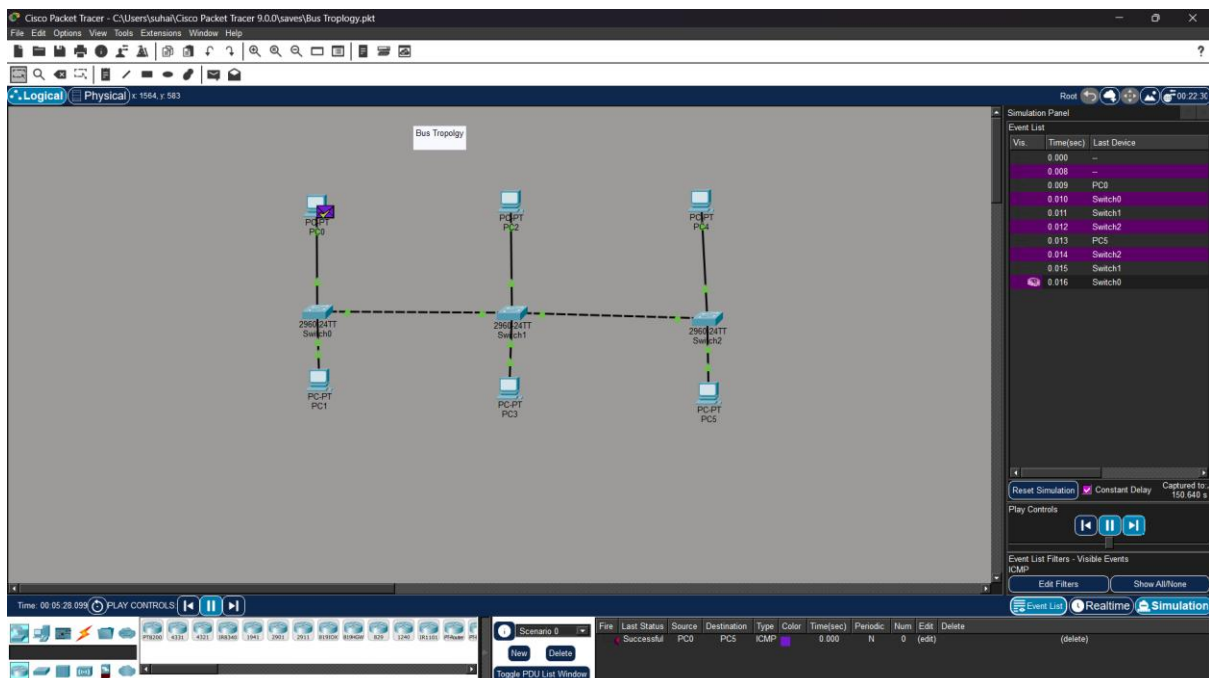

EXPERIMENT-4: IMPLEMENTATION OF RING TOPOLOGY USING PACKET TRACER

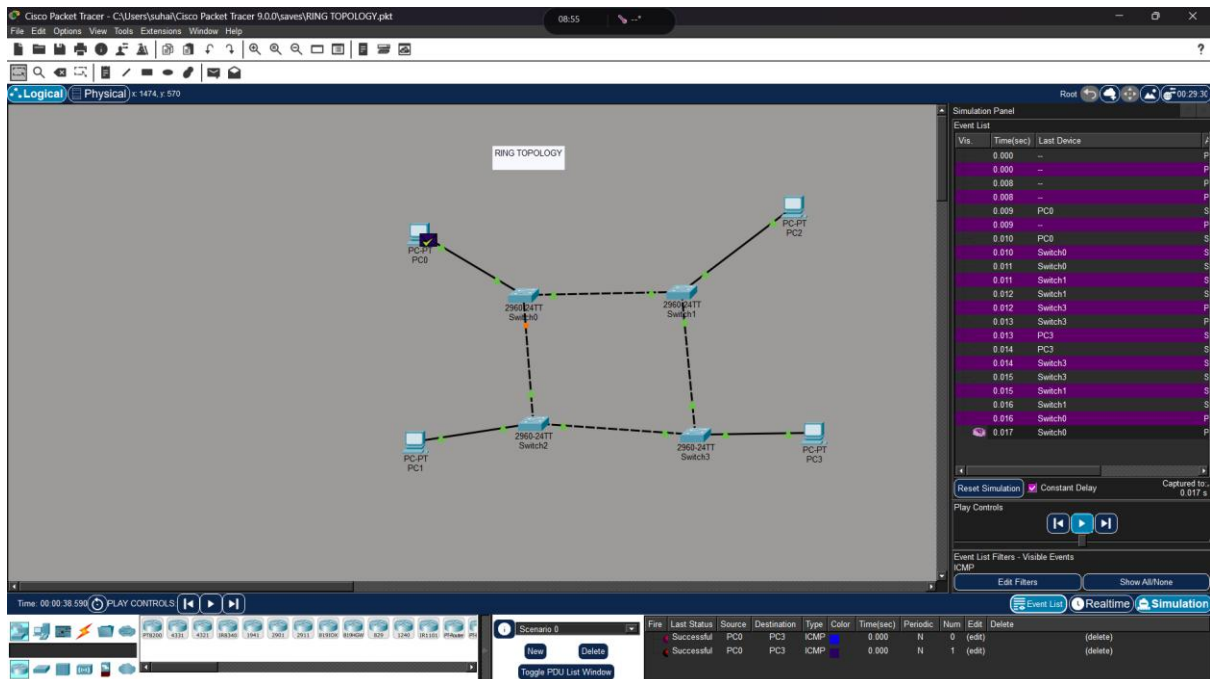

EXPERIMENT-5: IMPLEMENTATION OF MESH TOPOLOGY USING PACKET TRACER

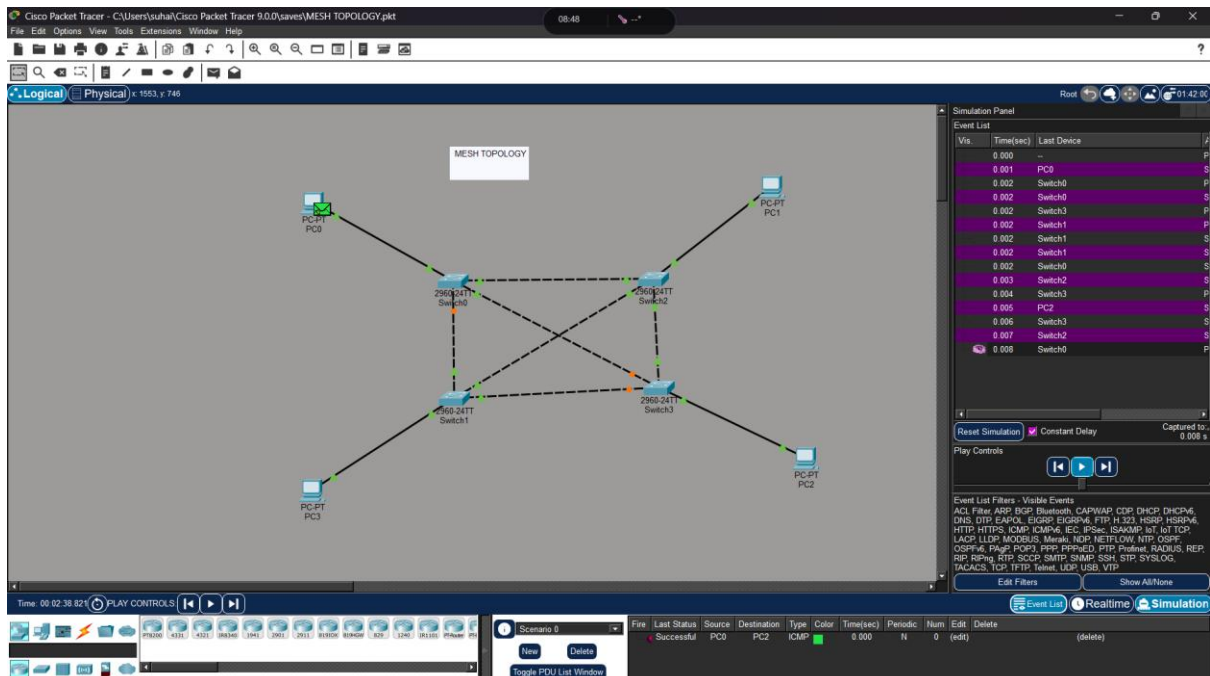

The screenshot displays the Cisco Packet Tracer 9.0.0 interface. The main workspace shows a network topology with three switches (2960-24TT Switch0, Switch1, and Switch2) connected in a vertical chain. Switch0 is connected to PC0 and PC1. Switch1 is connected to PC2 and PC3. Switch2 is connected to PC4 and PC5. The interface shows the 'Logical' tab selected, and the 'Simulation Panel' on the right displays an event list. The bottom status bar shows 'Time: 00:06:01.206' and 'PLAY CONTROLS'.

Simulation Panel - Event List

Vis	Time(sec)	Last Device
0.000	--	P
0.001	PC0	S
0.002	Switch0	S
0.003	Switch1	S
0.004	Switch2	P
0.005	PC5	S
0.006	Switch2	S
0.007	Switch1	S
0.008	Switch0	P

Simulation Panel - Play Controls

Reset Simulation ☒ Constant Delay Captured to: 390.587 s


Play Controls

Event List Filters - Visible Events

ICMP

Edit Filters

EXPERIMENT-8: DATA LINK LAYER TRAFFIC SIMULATION USING PACKET TRACER ANALYSIS OF ARP

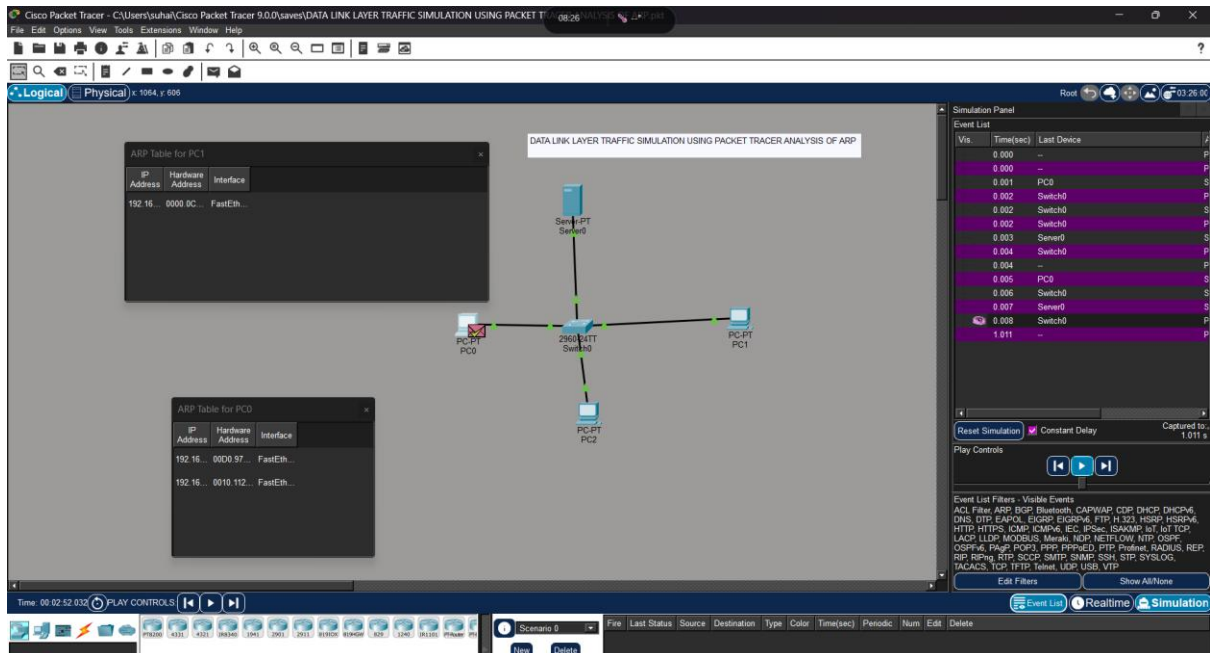

EXPERIMENT-9: DATA LINK LAYER TRAFFIC SIMULATION USING PACKET TRACER ANALYSIS OF CSMA/CD & CSMA/CA

