

EST · 2025




TITAN

— PRESSURE CONTROL —

— CONTROL. PROTECT. PERFORM. —

WELLHEAD · FRAC · PRODUCTION
ENGINEERED SOLUTIONS FOR PRESSURE CONTROL

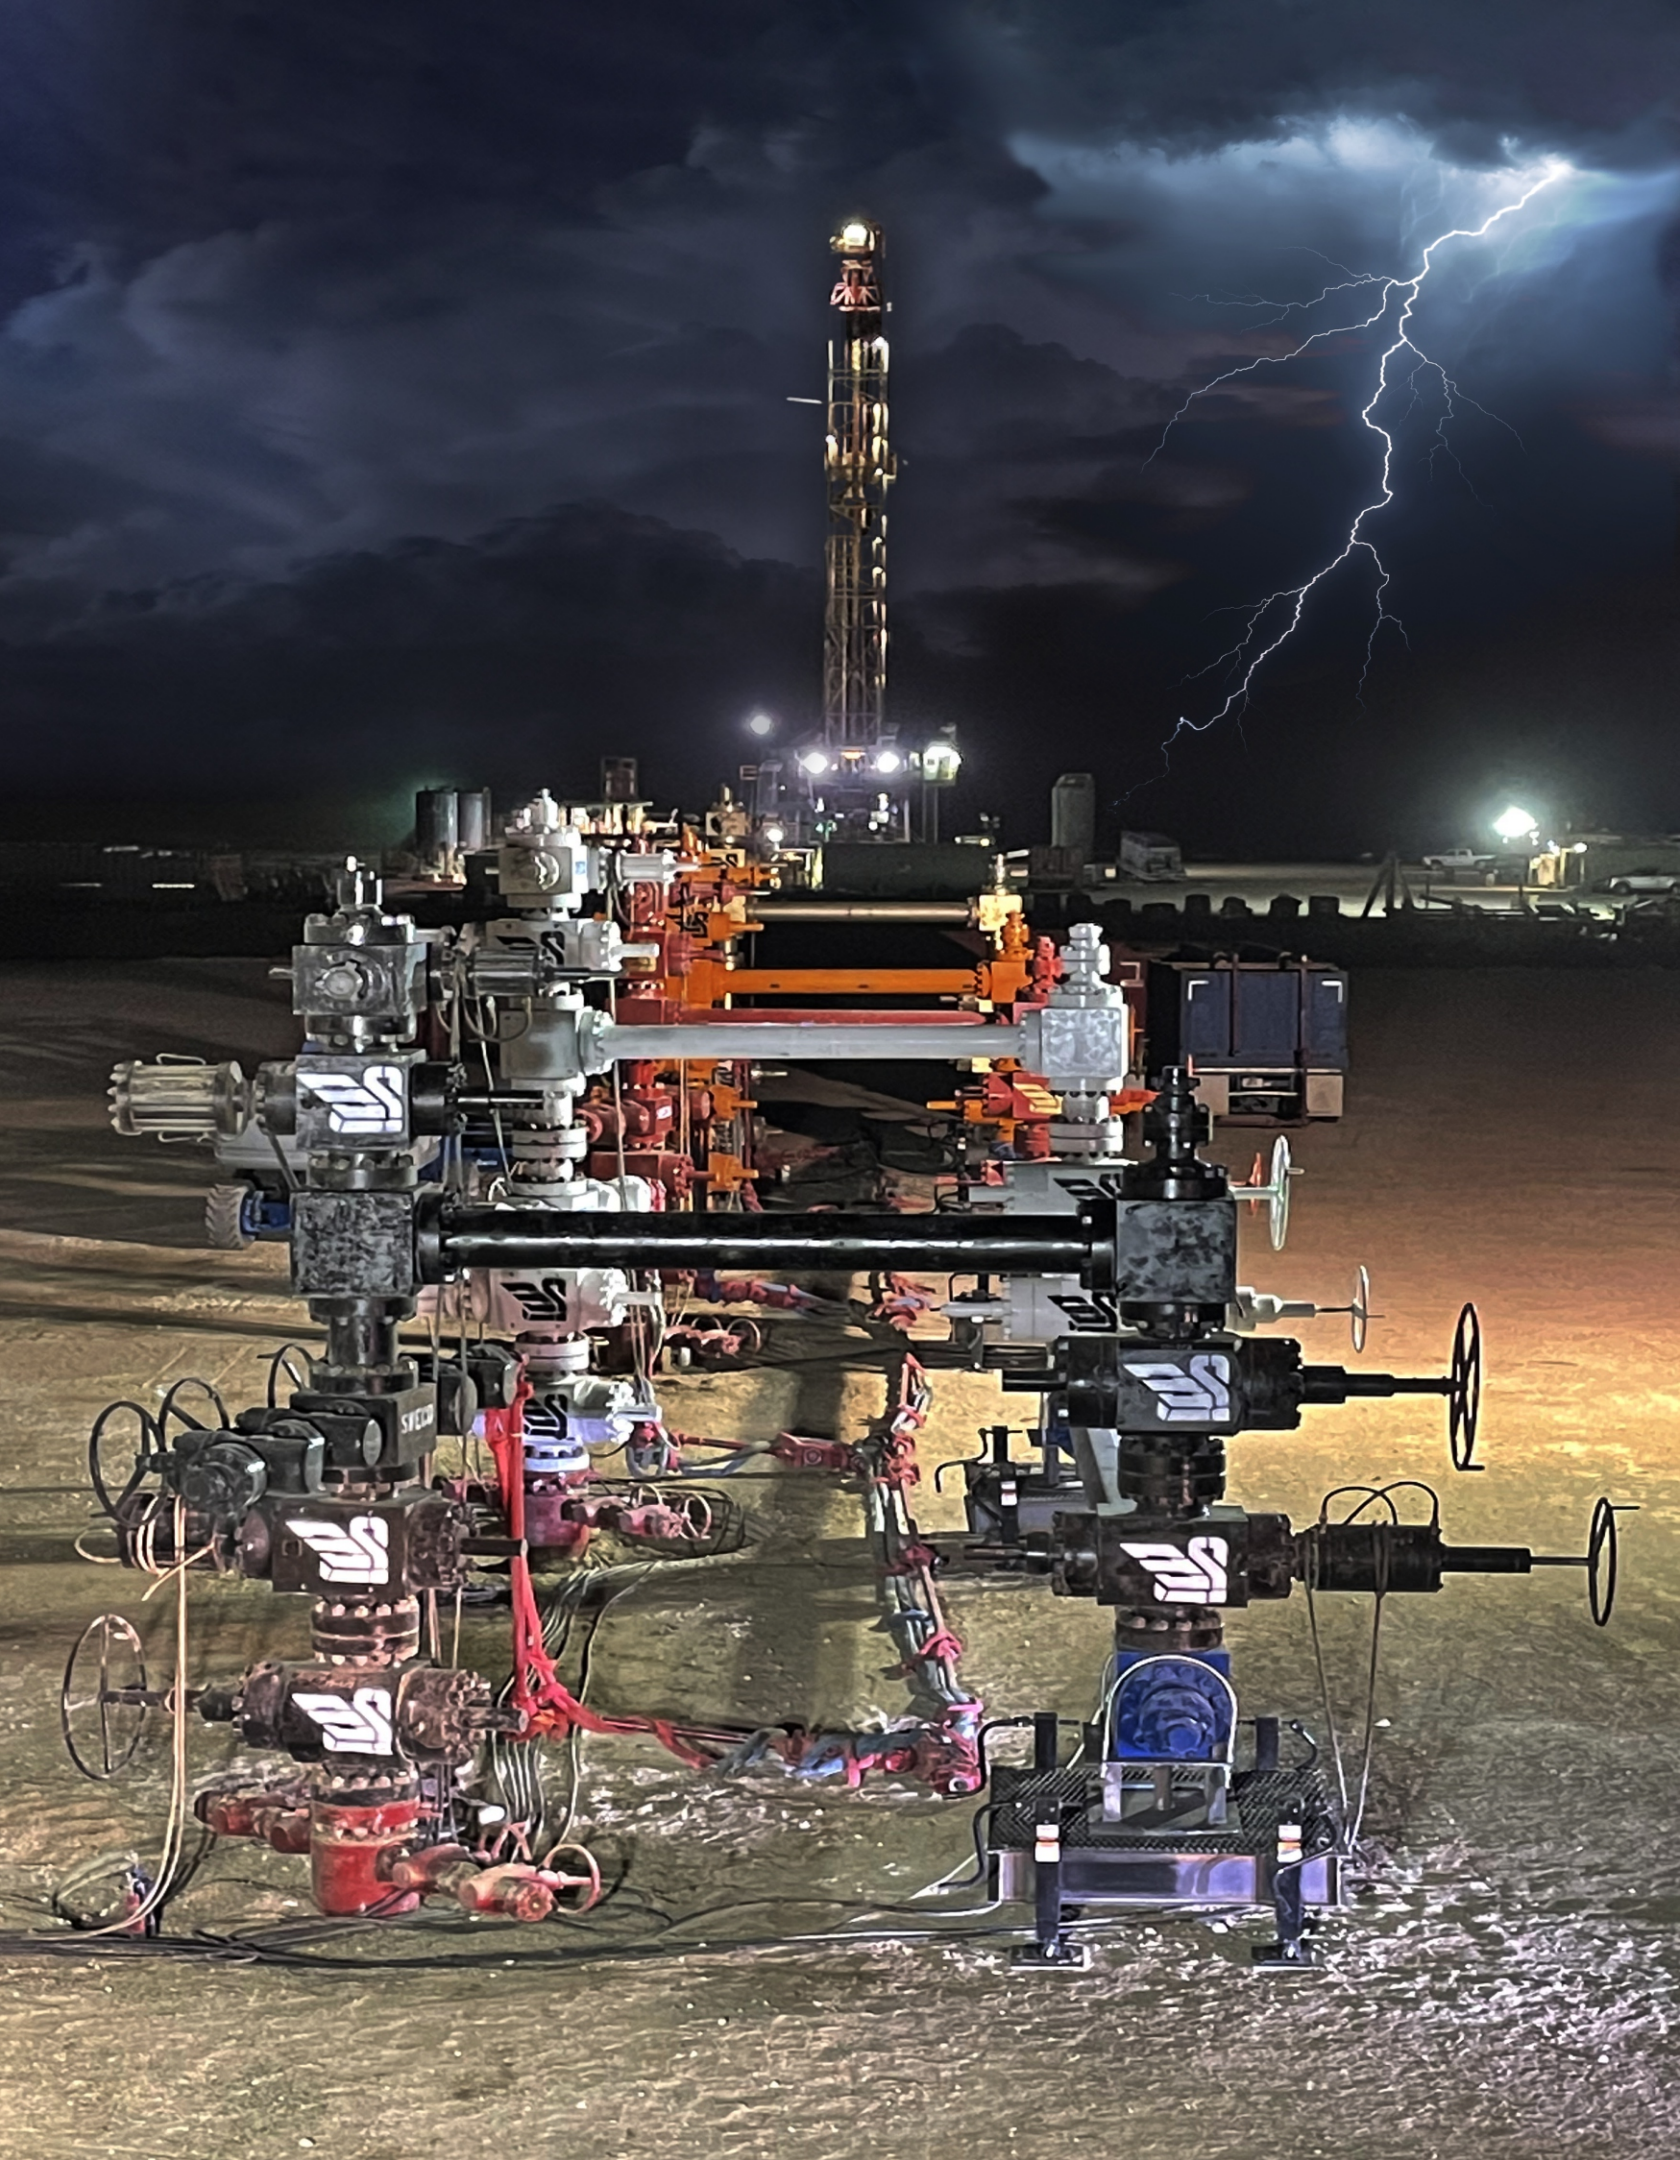

CAPABILITIES

A complete portfolio of engineered pressure control products and 24-hour field services — from spud to production.

CONVENTIONAL WELLHEADS 01

Casing heads, tubing heads, hangers, and seals built for quick delivery and field-proven service.

MULTI-BOWL SYSTEMS 02

Hang multiple casing strings in a single wellhead — saving rig time and reducing footprint.

QUICKLOCK BOP ADAPTER 03

Reduce cellar exposure and save 2–3 hours of rig time per connection.

QUICKSET WELLHEAD 04

Pre-assembled and pretested for fast installation without welding on the surface casing.

PRODUCTION TREES 05

API 6A monogrammed gate valves, 3,000–15,000 psi, manual or actuated configurations.

OFFLINE CEMENTING 06

Adapters that swap directly into the lower BOP QC for fast batch-drilling transitions.

FRAC TREES & STACKS 07

One of the largest frac inventories in the nation — 1-13/16" through 7-1/16" bores.

FAST-LINE FRAC SYSTEM 08

Single full-bore flow path eliminating flow iron, restraints, and unnecessary leak paths.



WELLHEAD PRODUCTS

Titan Pressure Control sells, installs and services most types of wellhead products. Our field and service personnel are available 24 hours a day to handle your wellhead needs. From drilling to production, Titan has the equipment and personnel to handle your pressures.

CORE PRODUCT LINES

- Conventional Wellhead
- Multi-Bowl Systems
- QuickLock Drilling Flange System
- QuickSet Wellhead System
- Production Trees
- Frac Stacks
- Field Greasing
- Field Pressure Testing

HANGERS · SEALS · BUSHINGS




Casing Hangers: SW-22, SW-29, SW-21P

Tubing Hangers: TC1B, TC1A, TC1A-EN, TC1W

Secondary Seals: SWI-PE, SWI-HP-PE

Bushing: SWI-O-2/4-0

COMPANION FLANGES

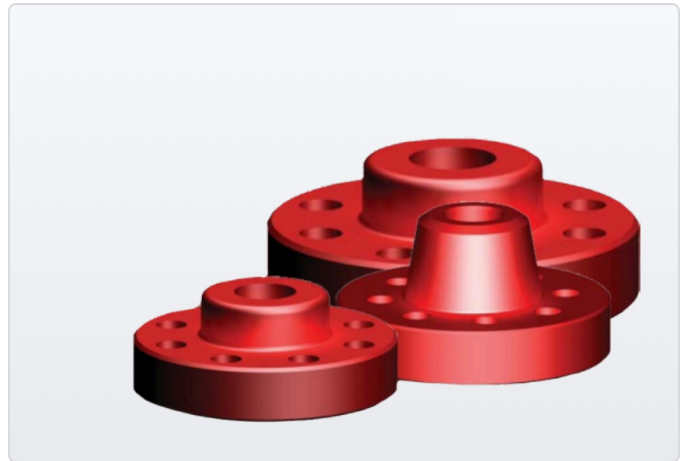

Standard sizes 1-13/16" through 7-1/16" with working pressures of 2,000 PSI through 15,000 PSI. Blind, weld-neck, and 410 stainless steel options available.

WELLHEAD COMPONENTS

Titan carries a complete line of **conventional wellhead components** available for quick delivery — chokes, tubing head adapters, tree caps, and accessories engineered for reliability and field-proven performance.

CHOKES

Positive and adjustable chokes designed for **reliable flow control and maximum wear life**.

- ◆ Available in flanged or threaded ends
- ◆ Bore sizes 1-13/16" through 4-1/16" nominal
- ◆ Working pressures 2,000–15,000 PSI
- ◆ Standard or special trim options

TUBING HEAD ADAPTERS & TREE CAPS



Adapters: B-1, B2P, A5P-EN, BO-2 tubing head adapters

Caps: BHTA tree caps · Tees · Crosses

Flange sizes 2-1/16" through 7-1/16" with working pressures of 2,000–15,000 PSI. Available in 410 stainless steel.

Available 24/7 · Contact your local Titan service center for sizing, availability, and pricing.



SERVICE & FIELD OPERATIONS

VALVE SERVICE & REPAIR


Titan Pressure Control offers complete valve service and repair. Our qualified valve technicians can troubleshoot and repair most valves in the market today. Valves can be serviced in shop or on customer location.



IN-FIELD SERVICES

Complete in-field service to handle our customers' needs — installation, testing, and maintenance for the full lifecycle of your wellhead.

- ◆ **Installation** — Frac equipment, casing hangers, back pressure valves, production trees
- ◆ **Greasing programs**
- ◆ **Field testing**
- ◆ **Troubleshooting**
- ◆ **Maintenance programs**

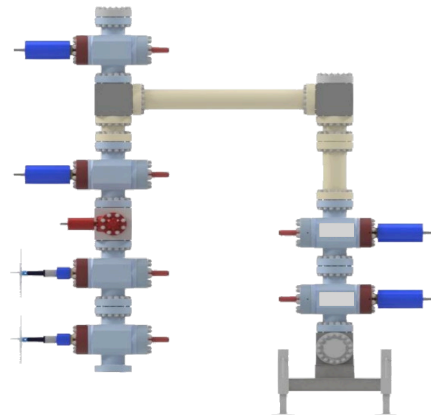


MULTI-BOWL WELLHEAD

Titan's **multi-bowl wellhead system** allows multiple casing strings to be hung in a single wellhead without having to break the BOP. This saves installation time, increases safety, and reduces footprint.

SYSTEM FEATURES

- ◆ Standard off-the-shelf casing head
- ◆ Single packoff for multiple casing strings
- ◆ C-29 bowl profile accepts standard off-the-shelf slips
- ◆ Removable upper section ensures flexibility and efficiency
- ◆ Significant rig time savings over conventional equipment
- ◆ Compatible with Titan's BOP Quick Connect, QuickSet Casing Head, and Offline Cement systems

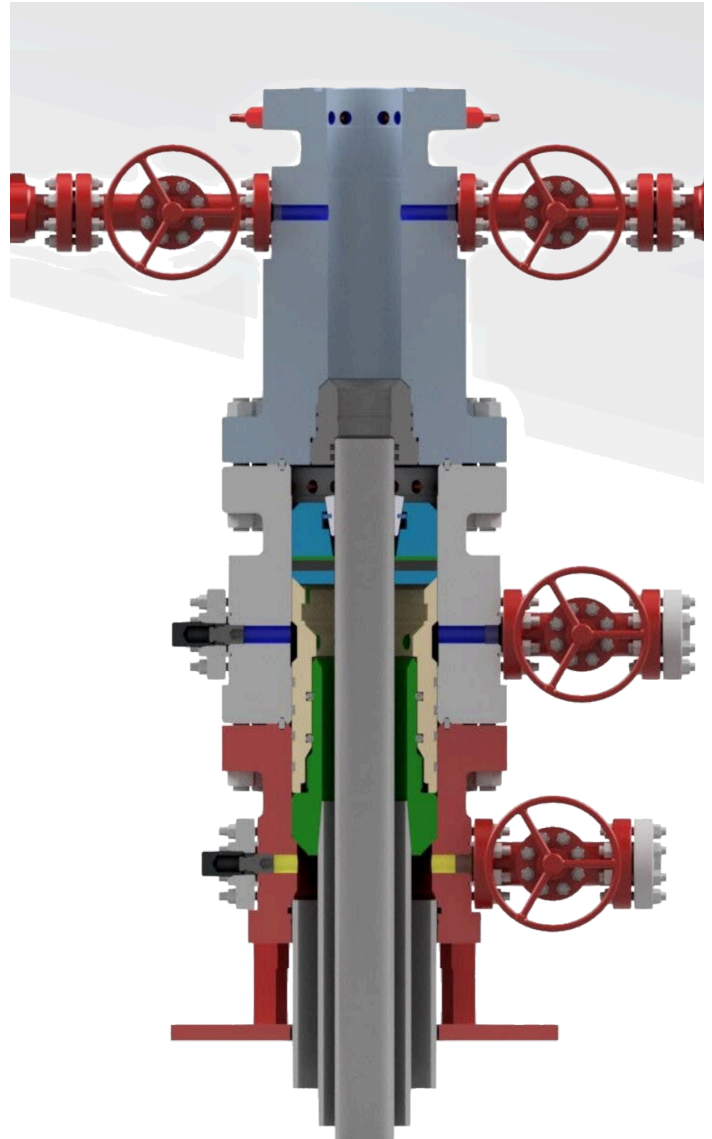

QUICKLOCK BOP ADAPTER

Titan's **QuickLock BOP Adapter** dramatically reduces cellar time and rig exposure while interfacing seamlessly with our offline cementing equipment.

SAFETY


- ◆ Less time working in the cellar
- ◆ Reduced personnel exposure to suspended loads

EFFICIENCY

- ◆ Saves 2–3 hours of rig time per connection
- ◆ Interfaces with offline cementing adapter

SIMPLIFIED OPERATIONS

- ◆ No hydraulic torque tools required
- ◆ Low-profile quick connect abandonment cap

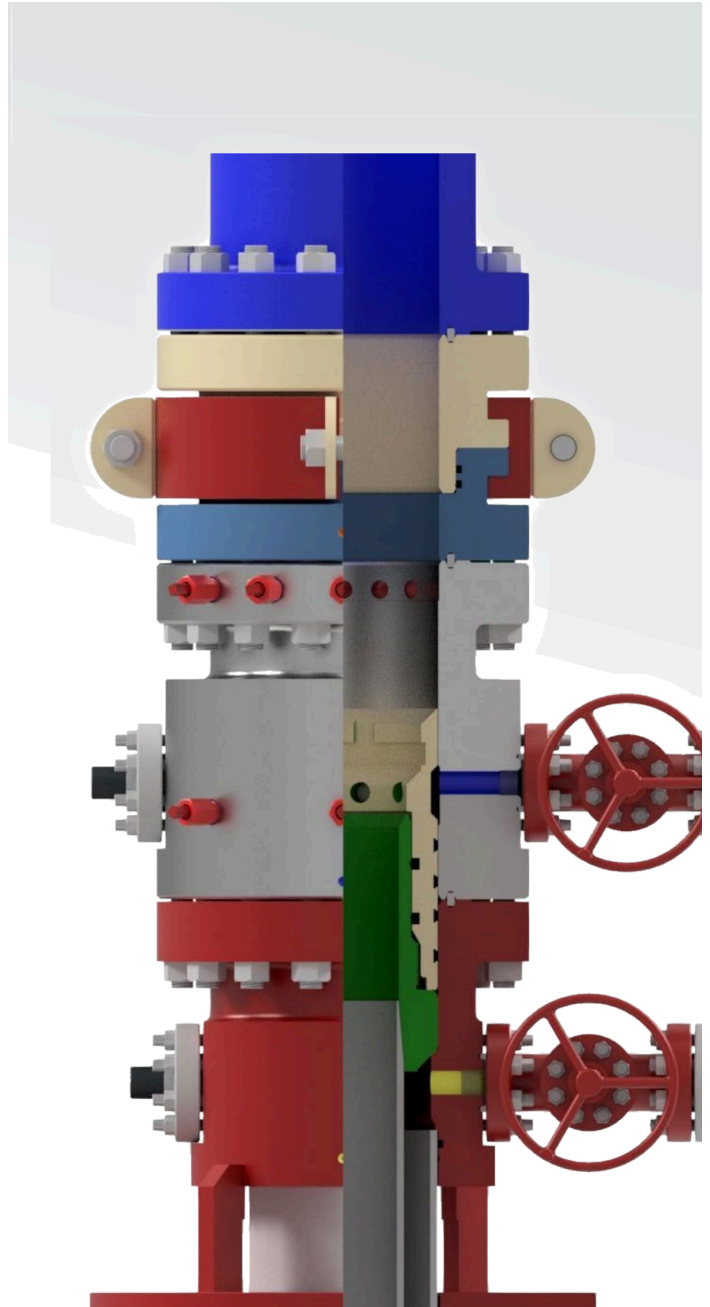


QUICKSET WELLHEAD

Using an innovative casing head design, Titan's **QuickSet Wellhead System** saves rig time by allowing a pre-assembled and tested assembly to be installed on the surface casing without needing to be welded on.

SYSTEM FEATURES

- ◆ QuickSet wellhead comes fully assembled and pretested for fast and simple installation
- ◆ Landing mandrel assembly can be easily installed through the rotary floor
- ◆ Wellhead assembly can be swiveled after being set for easy orientation before locking in place
- ◆ Same field-proven sealing designs and low profile as Titan's Multi-Bowl Wellhead system
- ◆ Compatible with offline cementing for batch drilling operations

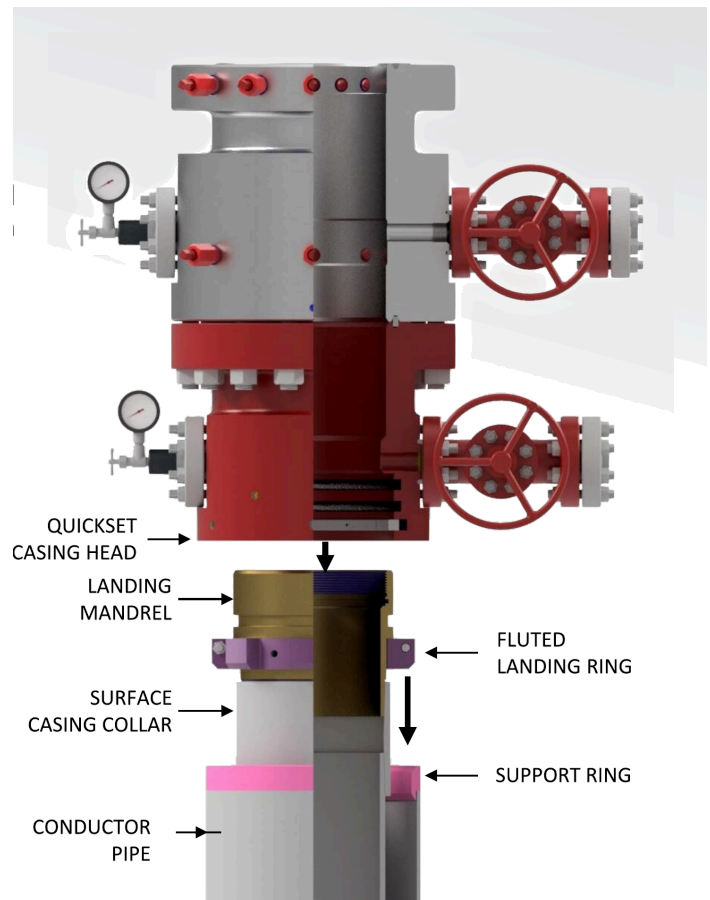


PRODUCTION TREES

Titan offers a **full range of production trees** to meet any field requirement — manual or actuated, in every standard size and material class.

FEATURES & BENEFITS

- ◆ API 6A monogrammed gate valves
- ◆ 3,000 psi – 15,000 psi pressure ratings
- ◆ Available in manual or with hydraulic, pneumatic, and diaphragm actuators
- ◆ Available for all standard production tree sizes
- ◆ AA, DD, EE, FF Material Classes

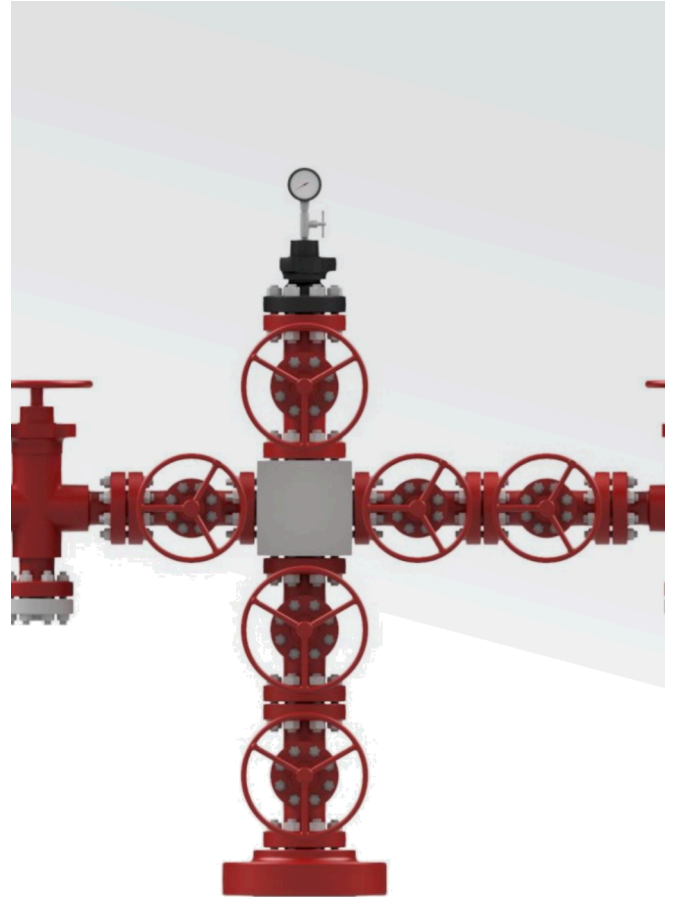


OFFLINE CEMENTING

Titan's **offline cementing system** enables a quick swap from drilling to cementing without breaking the BOP — purpose-built for multi-well pads and batch drilling operations.

FEATURES & BENEFITS


- ◆ BOP QC Offline Cementing system adapts directly to Titan's BOP Quick Connect System
- ◆ Offline cement adapter is installed into the lower BOP QC adapter and held in place with a clamp ring
- ◆ Clamp ring requires no special tools and is installed in minutes
- ◆ Available for all standard intermediate and production casing sizes
- ◆ Fast and efficient transition between drilling and cementing operations

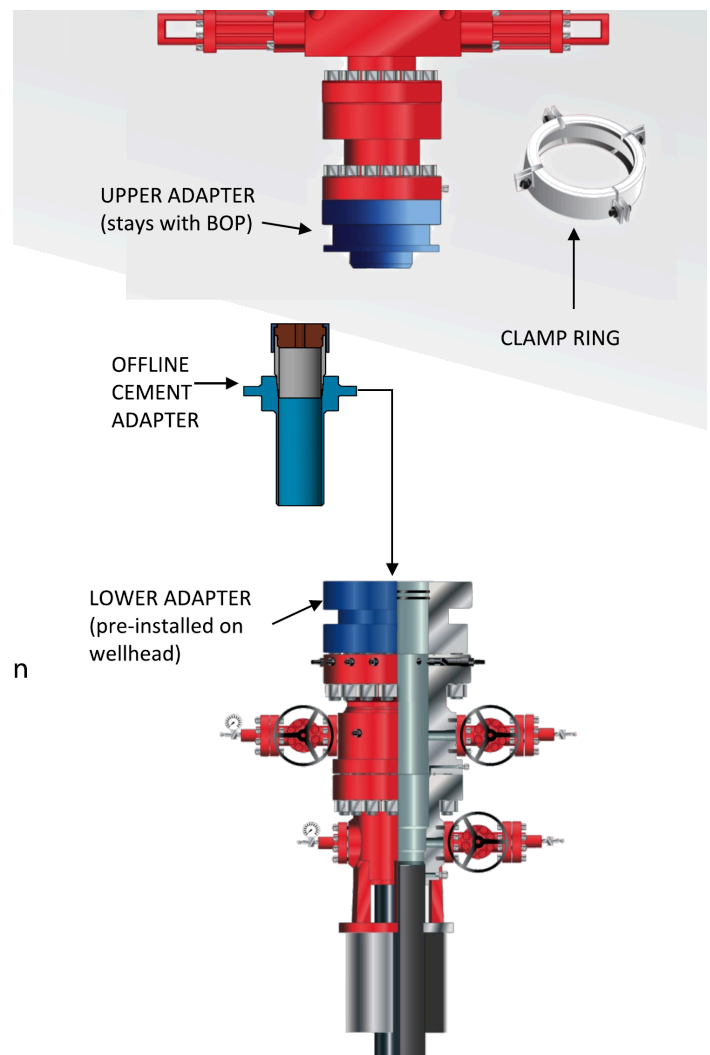

OFFLINE CEMENTING ADAPTERS


Titan's **Offline Cement Adapters** fit directly into the lower BOP QC adapter, ensuring a fast and efficient transition. Ideal for multi-well pads and batch drilling.

For offline cementing, the cement adapter fits directly into the lower adapter ensuring a fast and efficient transition. Titan's offline cement system is ideal for multi-well pads and batch drilling.

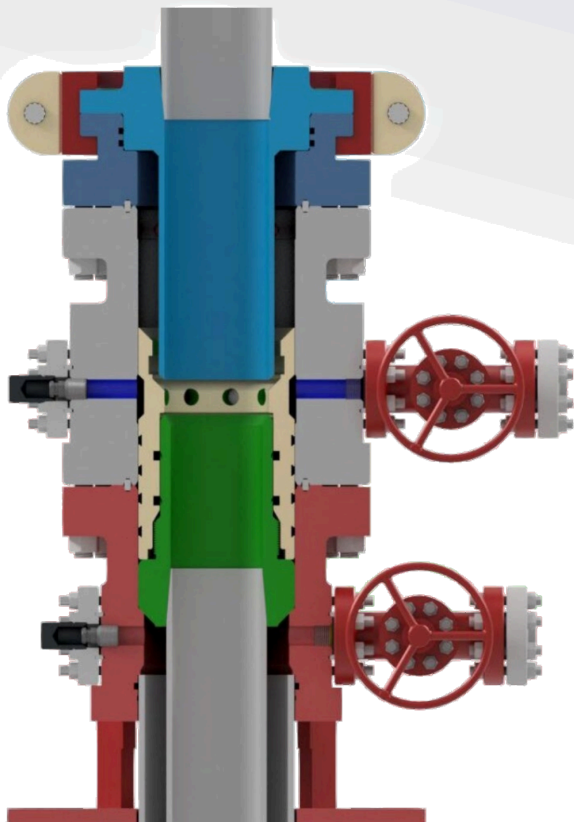

OFFLINE CEMENTING OF
INTERMEDIATE CASING

For offline cementing, the cement adapter fits directly into the lower BOP QC adapter ensuring a fast and efficient transition. SWECO's offline cement system is ideal for multi-well pads and batch drilling.

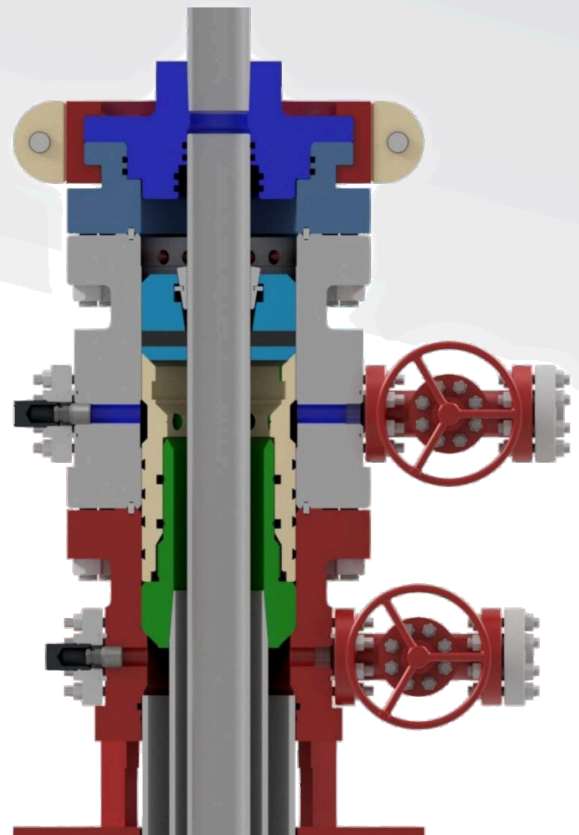

OFFLINE CEMENTING OF
PRODUCTION CASING

FRAC EQUIPMENT — FRAC TREES


Titan Pressure Control has one of the largest **frac inventories in the nation**, backed by full sales, rental, and service support.

FRAC TREE SPECIFICATIONS

- ◆ 1-13/16" through 7-1/16" Bores
- ◆ 5,000 psi through 15,000 psi working pressures
- ◆ 7-1/16" Large bore valves feature "EZ Torque" Ball Screws
- ◆ API 6A Material Class DD/EE and Temp Class P to U
- ◆ Zipper manifold available for multi-well pads

FRAC VALVE RENTALS · SALES · SERVICE

Available at all Titan service locations.
See back cover for contact information.

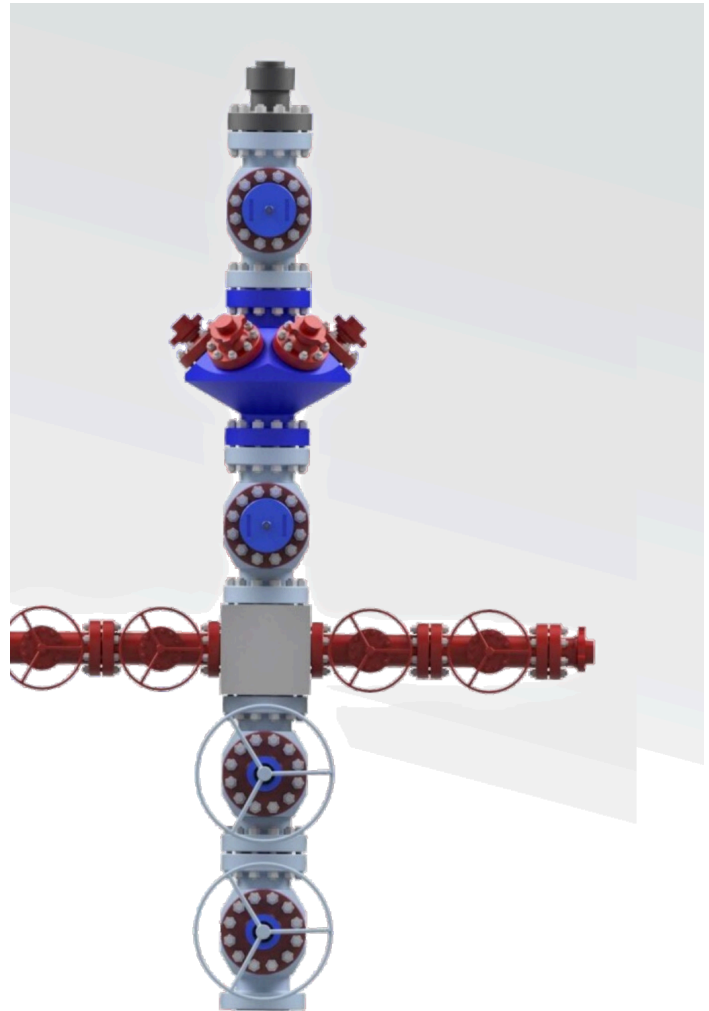


FAST-LINE FRAC SYSTEM

The Titan **Fast-Line Frac System** utilizes a single full-bore flow path for fracking multi-well pads — eliminating the need for traditional flow iron and dramatically reducing connection points.

FEATURES & BENEFITS

- ◆ Available in 7-1/16" — 10K & 15K configurations
- ◆ Eliminates the need for flow iron and pipe restraints
- ◆ Reduces number of connections and leak paths
- ◆ 7-1/16" Large bore valves feature "EZ Torque" Ball Screws or pneumatic actuators
- ◆ Engineered for high-volume, multi-well pad operations

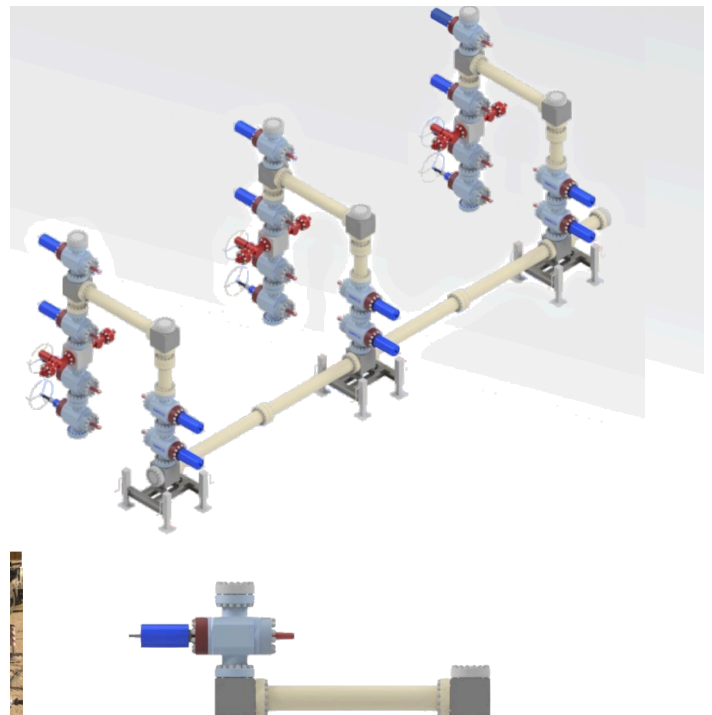



For more information about your next project, contact the sales/service location in your area. Our knowledgeable staff is ready to answer your questions and help plan your drilling program from spud to production.

CORPORATE HEADQUARTERS

12620 TX-191

Midland, TX 79707

Phone: 432-563-5500

titanpressurecontrol.com

Office Hours

Monday-Friday, 9am - 5pm

Service Available 24/7

Regions Served

Permian Basin • Bakken • Rockies

CONTROL • PROTECT •
PERFORM