

Exp No: 17

UART INTERFACING USING INTERRUPT IN KEIL

Objective :

1. To develop an Embedded C program for UART interfacing using interrupts in the 8051 microcontroller.
2. To transmit and receive serial data using UART and handle the communication through interrupts.

Code:


```
#include <reg51.h>

void serial_ISR(void) interrupt 4
{
    if(RI)
    {
        P1 = SBUF;
        RI = 0;
    }
}


void main()
{
    TMOD=0x20;
    TH1=0xFD;
    SCON=0x50;
    TR1=1;
    ES=1;
    EA=1;
    while(1);
}
```

```
}
```

Output:

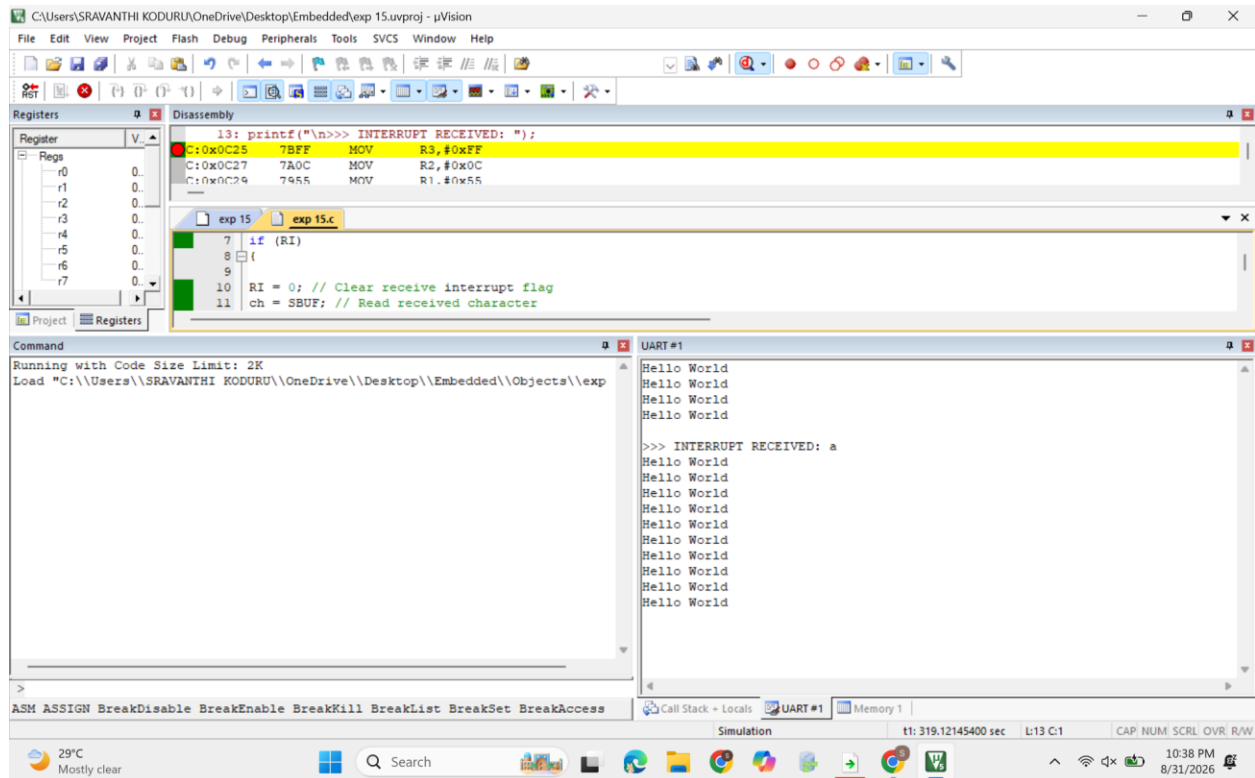

Before interrupt:

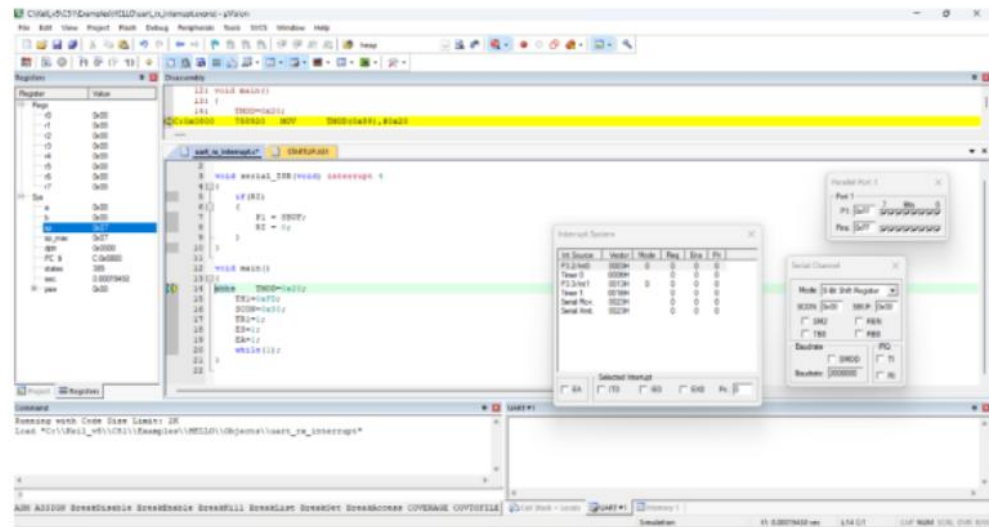

After interrupt:

