
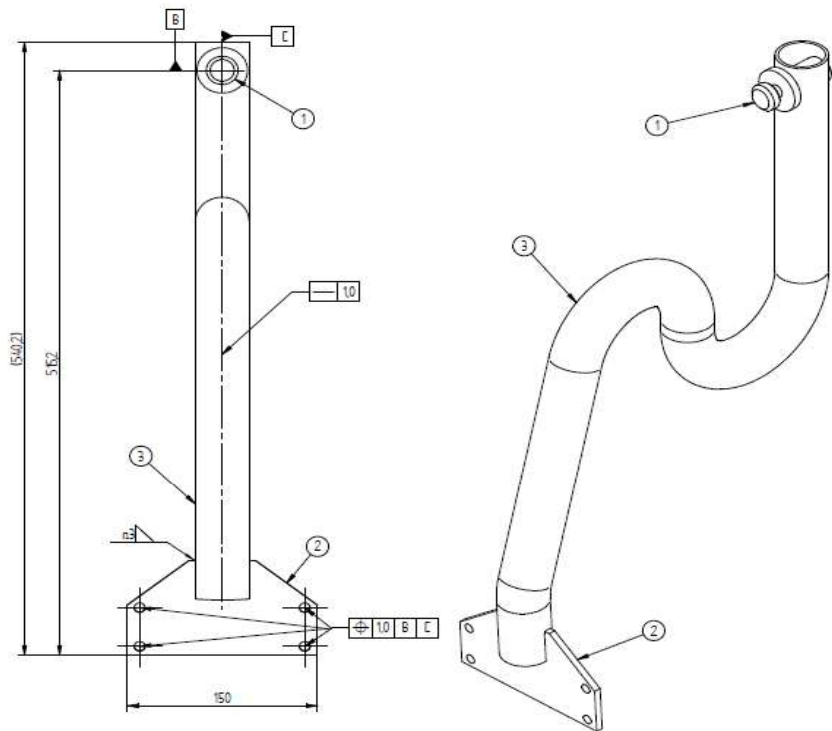


[illegible]

R20-079194

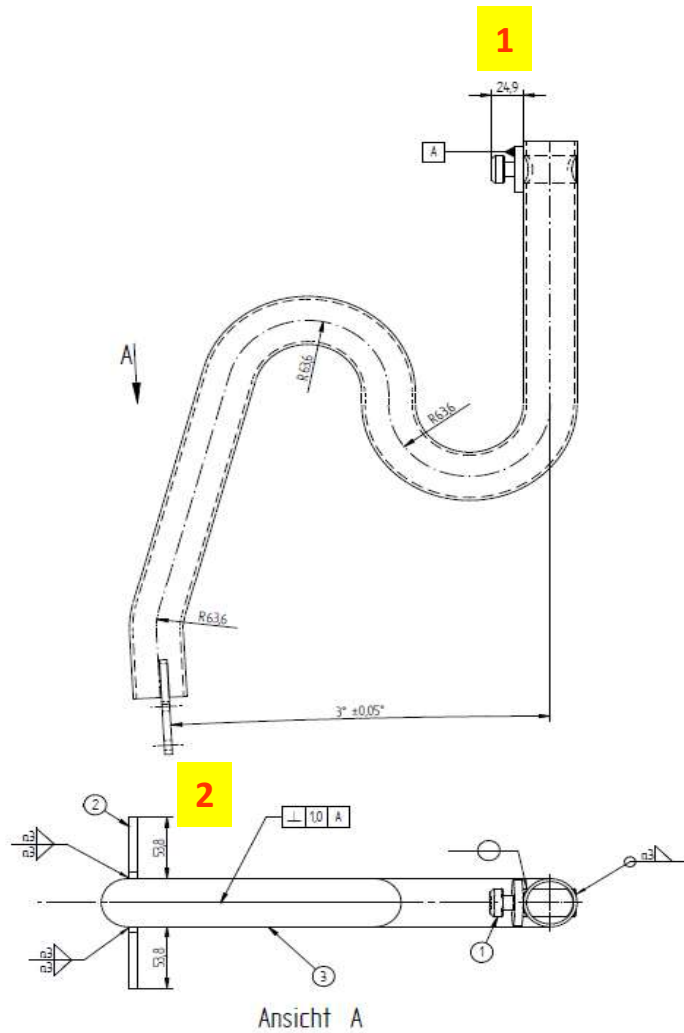

Oberfläche beizen und passivieren
Surface pickling and passivating

Pos.	Menge	Bezeichnung	Zeichnung-Nr.	Material	Masse
1	1	Aufhängelboolen	R20-079194	VM 114404	0.277 kg
2	1	Flansch	R20-079215	VM 114404	0.490 kg
3	1	Schweißnahtrohr 1 1/4"	R20-079880	VM 114404	2.354 kg

RIPPERT Rippert Anlagenbau GmbH (GmbH & Co.) KG - 53104 Bad Honnef (Germany)				Material:		Serial: 12.5	Conn.-No.:
Project No.:				Sheet thickness:		Customer:	
Order No.:				Weight kg:		Location:	
BOM Number:				Title:			
General information: 02 2746-01				All edges and small sheet pieces removed from parts		Schweißnahtrohr	
checked:	09.04.2020	MS	approved by: MS	Status: Freigegeben		Drawing number:	Version
version:	01	29.04.2020	MS	The engineering drawing is property of Rippert Anlagenbau GmbH & Co. KG. Reproduction, distribution and copying without written permission is strictly forbidden.		R20-079194	01
version:	01	29.04.2020	MS	Replacement for:		Option:	Sheet 1/1
Drawing change only if DSC system							

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
1																				
2																				
3																				
4																				
5																				
6																				
7																				
8																				
9																				
10																				
11																				
12																				
13																				
14																				
15																				
16																				
17																				
18																				
19																				
20																				
21																				
22																				
23																				
24																				
25																				
26																				
27																				
28																				
29																				
30																				
31																				
32																				
33																				
34																				
35																				
36																				
37																				
38																				
39																				
40																				
41																				
42																				
43																				
44																				
45																				
46																				
47																				
48																				

PRODUCT: R20-079550

BALLON				DIMENSION MEASURED						
NUMBER	NOMINAL	TOL -	TOL+	1	2	3	AVERAGE	RANGE	ELEMENT 1 Y/N ?	
1	465,3	0,5	0,5	472	469,3	471	470,7667	2,7	digital calit N	
2	306,9	0,5	0,5	306,6	306,3	306,4	306,4333	0,3	digital calit N	
3	127,2	0,5	0,5	127,6	126,9	127,6	127,3667	0,7	digital calit Y	
4	3	0,05	0,05	3	3	3	3	0	digital calit Y	
5	25	0	0	25	25	25	25	0	digital calit Y	
6	25,1	0,05	0,05	25,1	25,1	25,1	25,1	0	digital calit Y	
7	316,2	1	1	316,5	316,3	316,9	316,5667	0,6	digital calit Y	
8	354,8	1	1	347,3	347,8	347,6	347,5667	0,5	digital calit N	
9	352,4	1	1	352,8	352	348,8	351,2	4	digital calit N	
10	30	0,1	0,1	30	30	30	30	0	digital calit Y	
11	6,2	0	0,1	6,05	6,05	6,05	6,05	0	digital calit N	

Contact Information	
Manufacturing Plant	RICOS
Address	Via Aldo Moro 9
Address	36060
Address	Planezze (VI)
Contact Name	Michele Parise
Phone Number	+390424472021
E-mail	
Layout Inspector	
QA Approval	


Calculations: Check for Out of Spec

- Spec	+ Spec	Dim 1	Dim 2	Dim 3	Max OOI	Min OOI
464,800	465,800	6,2	3,5	5,2	6,2	3,5
306,400	307,400	In Spec	-0,1	In Spec	-0,1	-0,1
126,700	127,700	In Spec	In Spec	In Spec	0	0
2,950	3,050	In Spec	In Spec	In Spec	0	0
25,000	25,000	In Spec	In Spec	In Spec	0	0
25,050	25,150	In Spec	In Spec	In Spec	0	0
315,200	317,200	In Spec	In Spec	In Spec	0	0
353,800	355,800	-6,5	-6	-6,2	-6	-6,5
351,400	353,400	In Spec	In Spec	-2,6	-2,6	-2,6
29,900	30,100	In Spec	In Spec	In Spec	0	0
6,200	6,300	-0,15	-0,15	-0,15	-0,15	-0,15
			In Spec	In Spec	0	0
23,900	25,900	In Spec	In Spec	In Spec	0	0
52,800	54,800	In Spec	In Spec	In Spec	0	0
No Tol	No Tol	In Spec	In Spec	In Spec	0	0
No Tol	No Tol	In Spec	In Spec	In Spec	0	0
No Tol	No Tol	In Spec	In Spec	In Spec	0	0
No Tol	No Tol	In Spec	In Spec	In Spec	0	0
No Tol	No Tol	In Spec	In Spec	In Spec	0	0
No Tol	No Tol	In Spec	In Spec	In Spec	0	0

PRODUCT: R20-079194

NUMBER	NOMINAL	TOL -	TOL+	1	2	3	AVERAGE	RANGE	ELEMENT 1 Y/N ?	
1	24,9	1	1	25,2	25,2	25,2	25,2	0	digital calit Y	
2	53,8	1	1	53,6	53,6	53,8	53,6667	0,2	digital calit Y	

PRODUCT: R20-079193

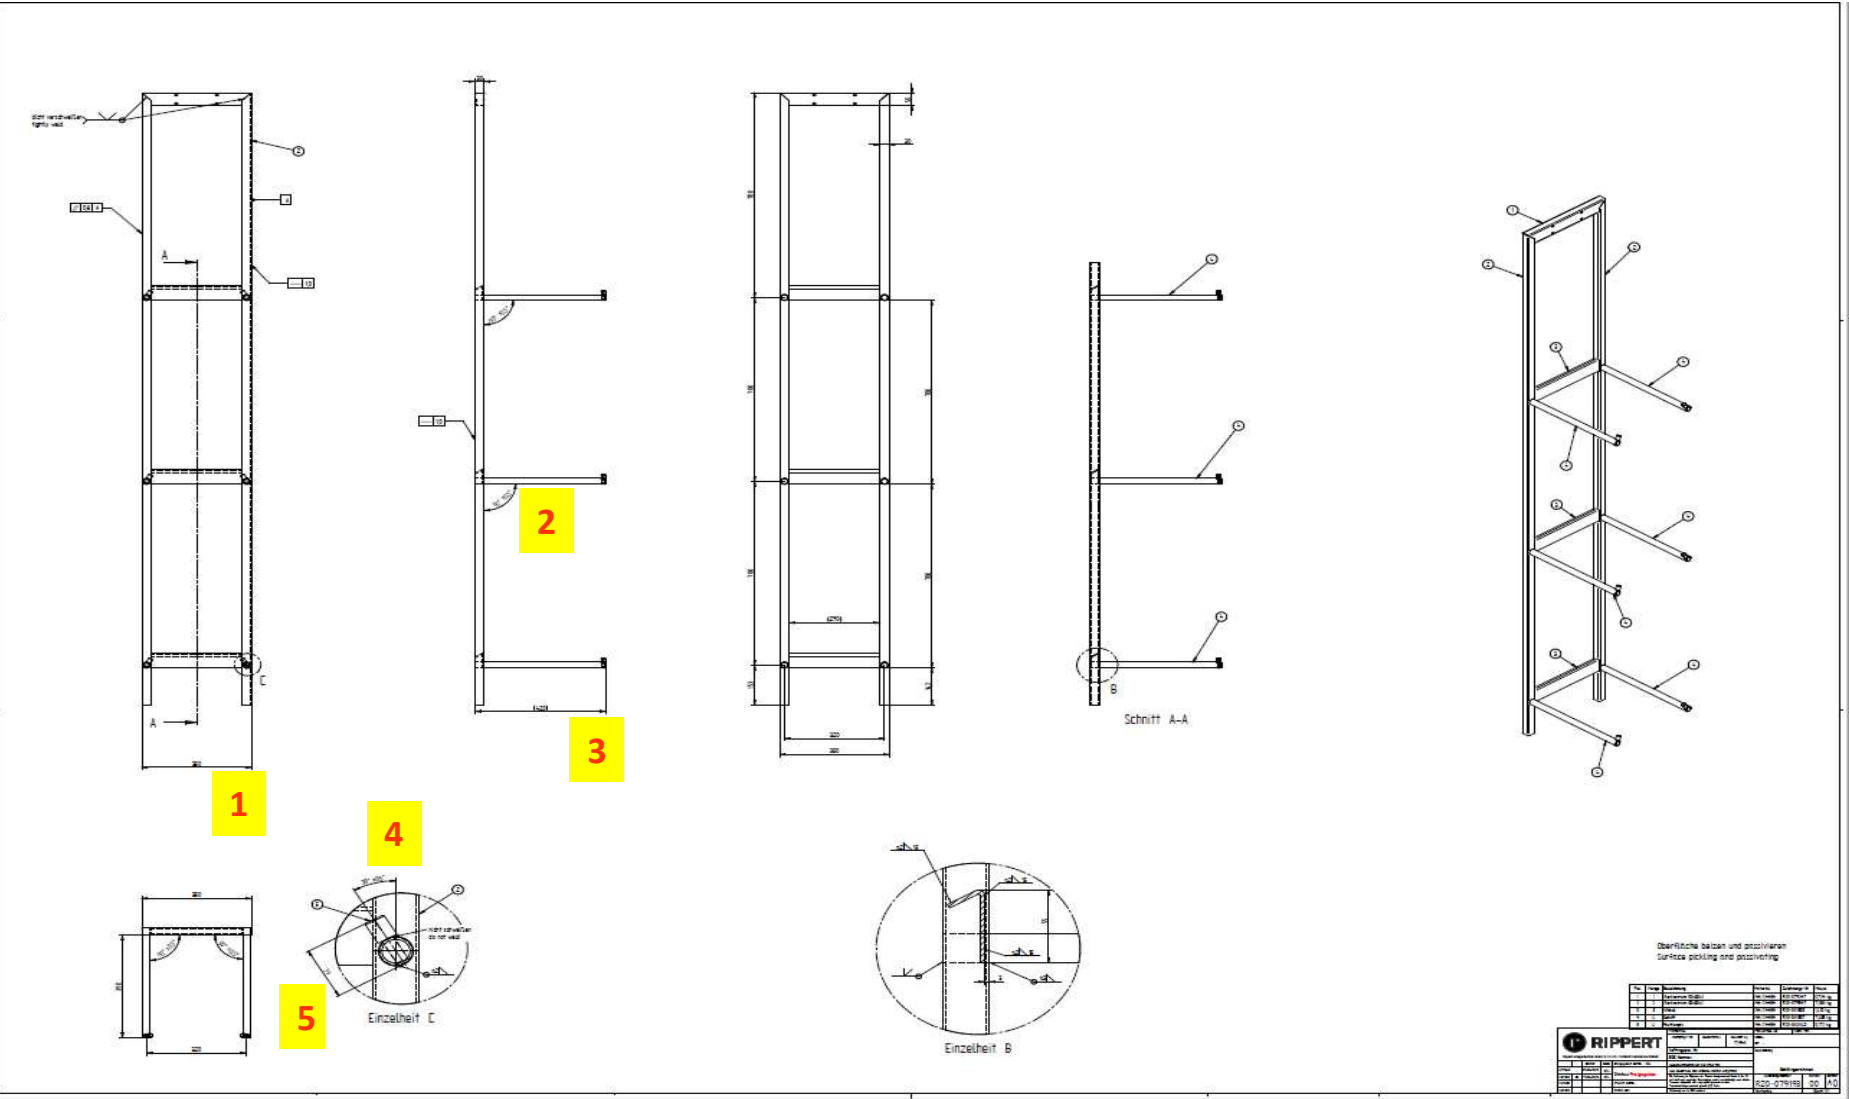

PRODUCT R20-079193

NUMBER	NOMINAL	TOL -	TOL+	1	2	3	AVERAGE	RANGE	TOOL USED	Y/N ?
1	350	1	1	349,6	349,8	349,5	470,767	0,3	digital c.	Y
2	90	1	1	90	90	90	306,433	0	digital c.	Y
3	420	1	1	419	419,9	420	127,367	1	digital c.	Y
4	30	0,5	0,5	30	30	30	3	0	digital c.	Y
5	39	1	1	39,3	39,1	39	25	0,3	digital c.	Y

- Spec	+ Spec	Dim 1	Dim 2	Dim 3	Max OOT	Min OOT
349,000	351,000	In Spec	In Spec	In Spec	0	0
89,000	91,000	In Spec	In Spec	In Spec	0	0
419,000	421,000	In Spec	In Spec	In Spec	0	0
29,500	30,500	In Spec	In Spec	In Spec	0	0
38,000	40,000	In Spec	In Spec	In Spec	0	0