1. Description

1.1. Project

Project Name	nucleo_cfg
Board Name	NUCLEO-L053R8
Generated with:	STM32CubeMX 4.14.0
Date	06/18/2016

1.2. MCU

MCU Series	STM32L0
MCU Line	STM32L0x3
MCU name	STM32L053R8Tx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

STM32L053R8Tx
LQFP64
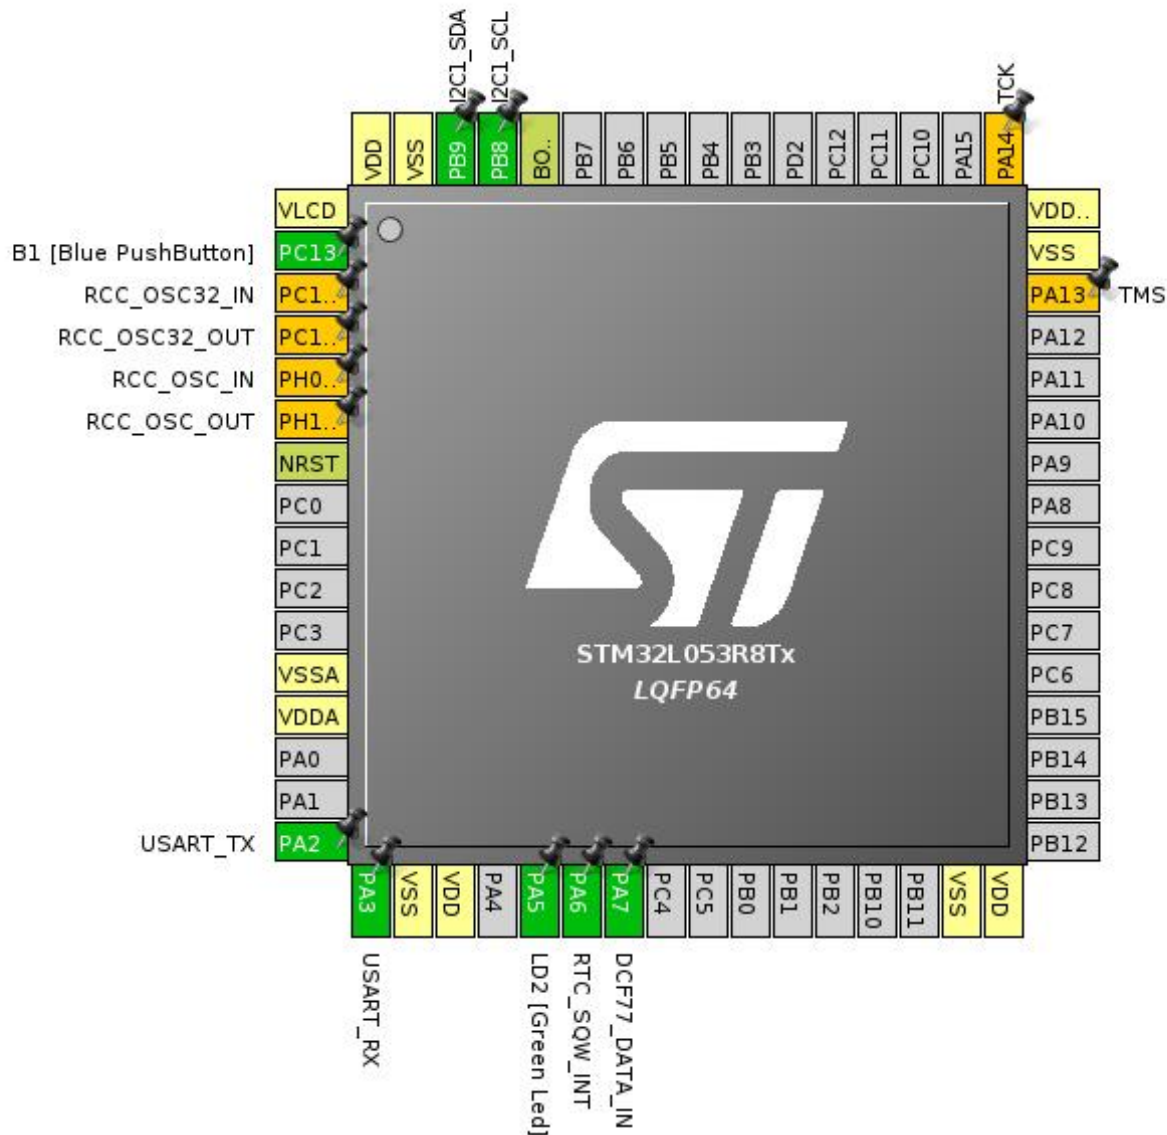
3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VLCD	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
22	PA6	I/O	GPIO_EXTI6	RTC_SQW_INT
23	PA7 **	I/O	GPIO_Input	DCF77_DATA_IN
31	VSS	Power		
32	VDD	Power		
46	PA13 *	I/O	SYS_SWDIO	TMS
47	VSS	Power		
48	VDD_USB	Power		
49	PA14 *	I/O	SYS_SWCLK	TCK
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

 * The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration
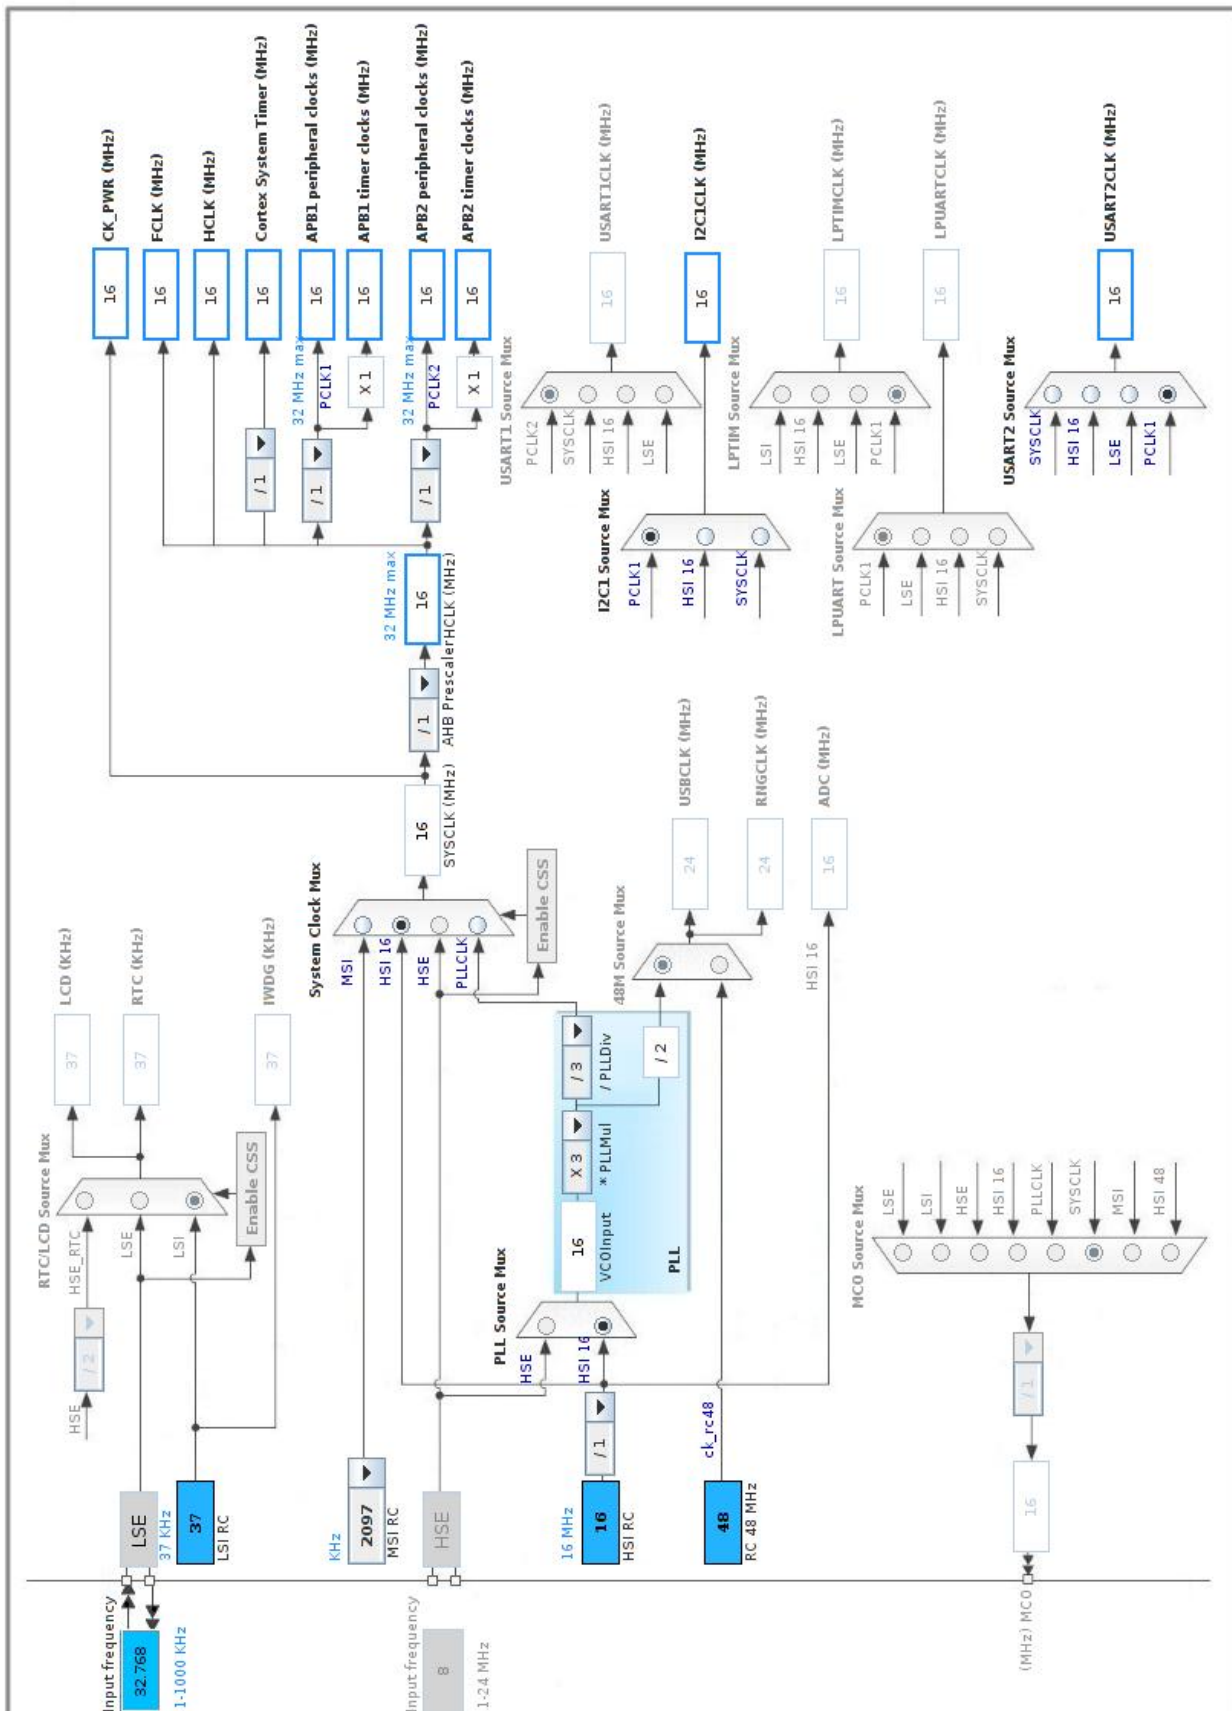
5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x00303D5B ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.2. SYS

Timebase Source: SysTick

5.3. USART2

Mode: Asynchronous

5.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	**576000 ***
Word Length	**8 Bits (including Parity) ***
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	**High ***	
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	**High ***	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	**High ***	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	**High ***	USART_RX
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
	PA13	SYS_SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_SWCLK	n/a	n/a	n/a	TCK
GPIO	PC13	GPIO_EXTI13	**External Event Mode with Rising edge trigger detection ***	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]
	PA6	GPIO_EXTI6	External Interrupt Mode with Rising edge trigger detection	**Pull-up ***	n/a	RTC_SQW_INT
	PA7	GPIO_Input	Input mode	**Pull-up ***	n/a	DCF77_DATA_IN

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System tick timer	true	0	0
EXTI line 4 to 15 interrupts	true	0	0
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	true	0	0
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash and EEPROM global interrupt	unused		
RCC and CRS global interrupt	unused		

* User modified value

7. Power Plugin report

7.1. Microcontroller Selection

Series	STM32L0
Line	STM32L0x3
MCU	STM32L053R8Tx
Datasheet	025844_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	nucleo_cfg
Project Folder	/home/mr_gogol/Pulpit/dcf77_clock/gen/nucleo_cfg
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_L0 V1.5.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No