


HONDA®
WORLD'S LARGEST MOTORCYCLE MANUFACTURER

CBX 750F



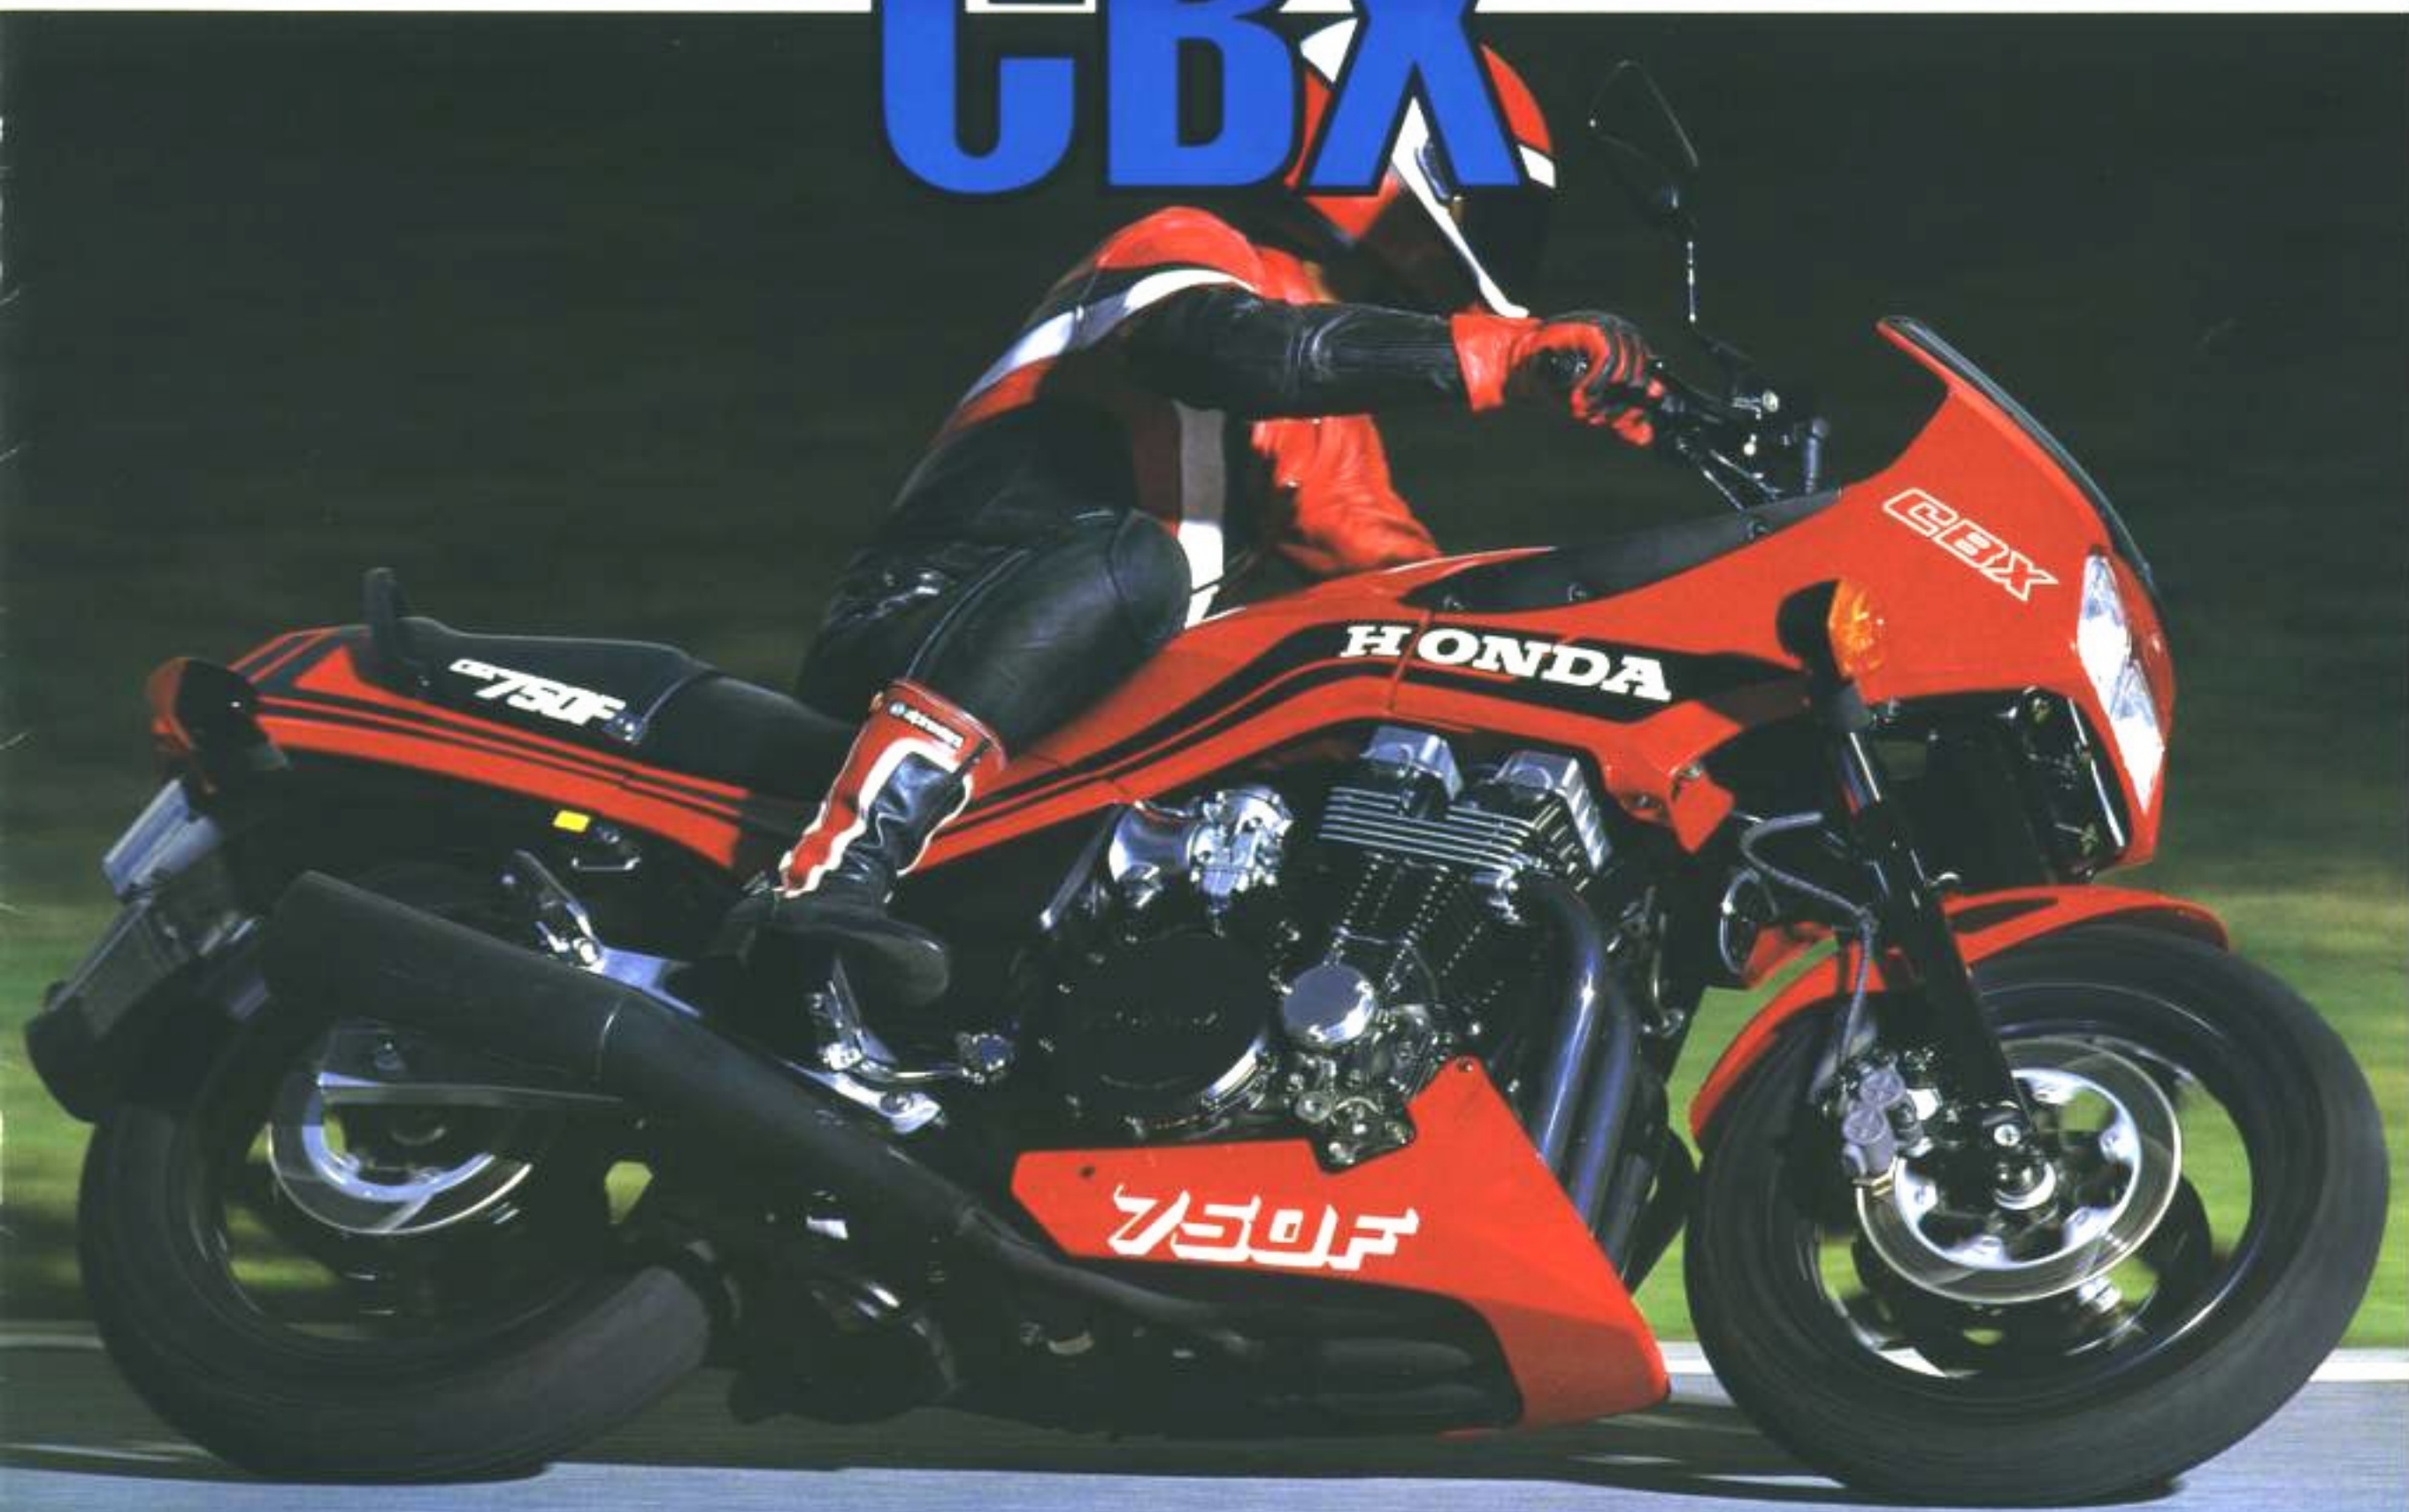

CBX

HONDA

CBX




WHERE TRADITIONAL BECOMES STATE-OF-THE-ART


From the engineering and design experts who fathered the modern-day inline four legend comes another page in the continuing saga of performance expertise. The CBX750F. A totally new motorcycle destined to become a legend in its own

time. Packing 91 horses into a slim, compact 218kg and sporting up-to-the-minute suspension and aerodynamics, the CBX750F is your ticket to a radically new dimension in motorcycling. And another page in Honda's inline-four legend.



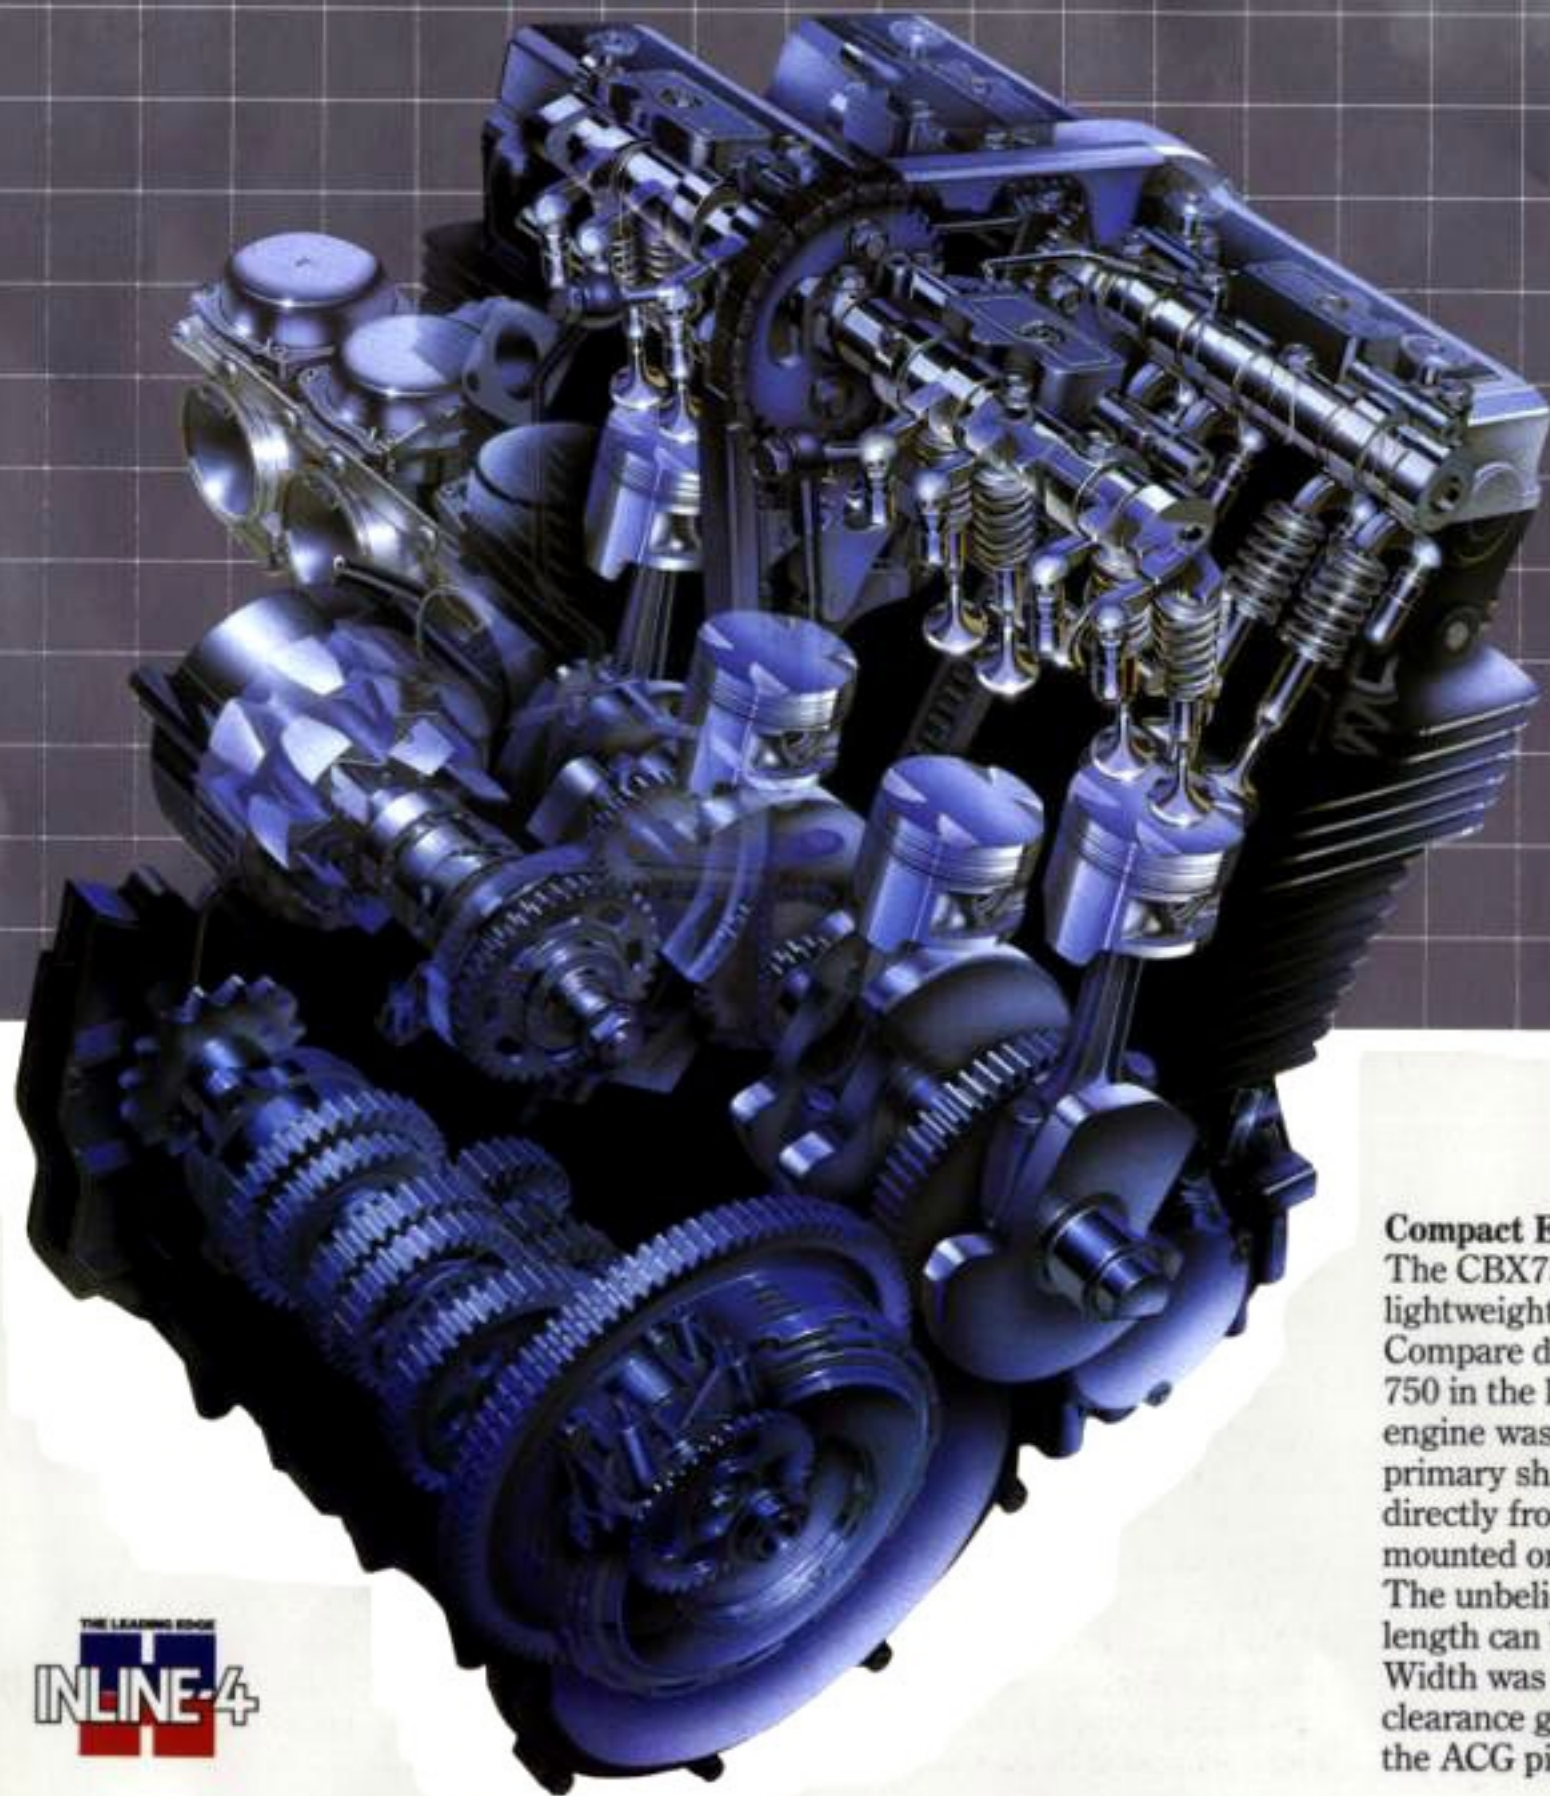

THE LEADING EDGE
INLINE-4

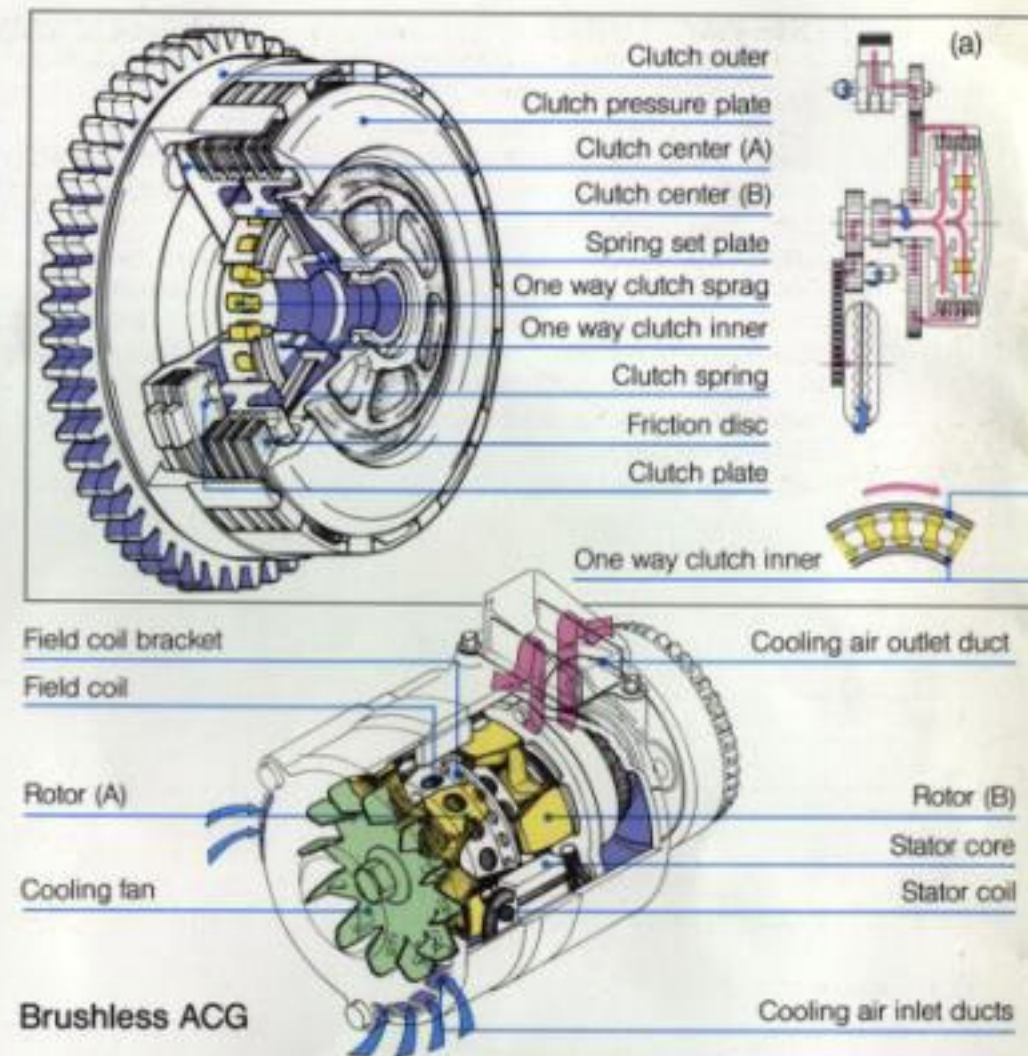

FIRST INTO THE


Compact Engine Dimensions

The CBX750F's engine is compact and lightweight, even by Honda standards. Compare dimensions with a previous 750 in the line drawing shown. The engine was designed to eliminate the primary shaft, power being transferred directly from the crank to the clutch mounted on the transmission shaft. The unbelievable reduction in engine length can be easily seen. Width was reduced, and cornering clearance greatly increased, by locating the ACG piggyback behind the cylinder.

ders. The brushless design is maintenance-free and the unit is forced air cooled. With the frame downtubes doubling as a small oil tank, the oilpan volume is reduced and the engine placed lower in the frame. This lowers the



Size Comparison: Blue/CB750F, Red/CBX750F

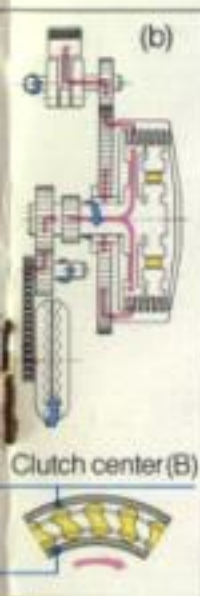

ONE WAY CLUTCH

To give smoother downshifting and maintain stable handling, Honda's unique one way clutch is fitted. With the engine delivering power normally, the sprags lock together the clutch center (B) and the one way clutch inner. In this mode, the complete clutch functions as a normal unit (a).

During quick downshifts and whenever excessive backload occurs, the sprags lay down disengaging the one way clutch. In this mode, half the clutch plates and friction discs do not transmit power, and the remaining clutch plates and friction discs slip momentarily releasing excessive backload (b).


HYDRAULIC VALVE ADJUSTER

Another Honda maintenance-reducing, power-increasing system.

OPERATION

1. When the valve fully closes, the check valve opens allowing oil to flow out of the plunger. In this mode, the plunger spring only supports the rocker arm maintaining zero valve clearance.
2. As the camshaft begins to move the rocker arm, hydraulic pressure closes the check valve to lock up the plunger and hold the rocker arm end in a fixed position.
3. The hydraulic valve adjuster maintains zero valve clearance until the valve fully closes again.

Retainer cap
Plunger
Body
Reservoir
Check ball
Check ball cage
Plunger spring
High pressure chamber

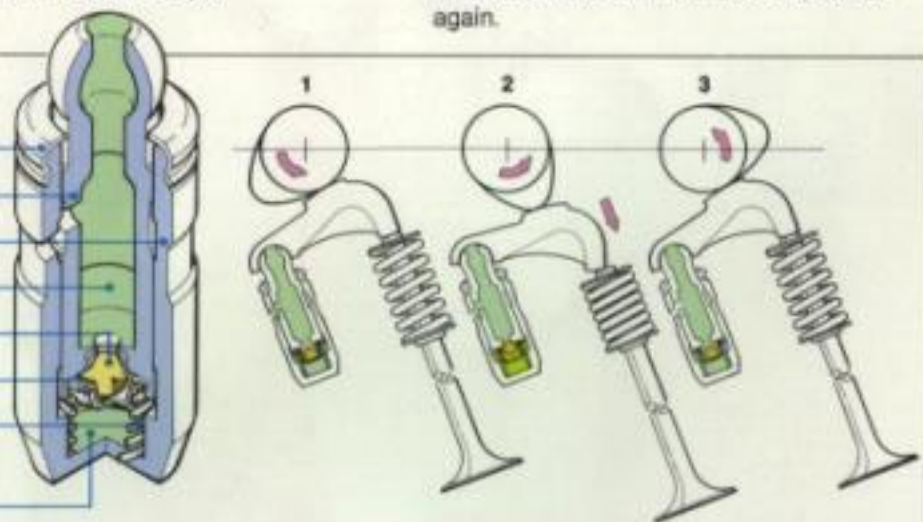

FUTURE AGAIN

center of gravity improving straight line stability and combined with bevelled sidecovers increases cornering clearance.

Innovative 4-stroke Expertise

The CBX750F engine sports a number of forward-thinking innovations enhancing power output and machine drivability and reducing time-consuming, expensive maintenance.

Like a hydraulic valve adjuster system. A floating rocker arm is pivoted on the hydraulic valve adjuster unit. As the camshaft begins to move the rocker arm, the unit locks up. Valve

timing is always accurate, even under extreme operating conditions, and maintenance is eliminated. Next on the list of no-maintenance features is the transistorized, pointless ignition. It even features a power-boosting electronic advance mechanism and built-in over-rev protection.

Hydraulic clutch actuation is stable and precise, primary drive is by no-maintenance gear and auto camchain tensioning is employed.

The CBX is a high-rpm, high-performance motorcycle. To keep it running


cool and eliminate power-robbing overheating even under extreme temperature conditions, a full flow, high-efficiency oil cooler is standard.

Performance-extracting 4-2-1-2 Exhaust

To extract the maximum power from the CBX's high-performance engine, an innovative exhaust system was developed from scratch. The four individual header pipes merge into two below the engine, with a balance tube connecting these a little further back. Final exhaust is by two tucked-in, high-




flow mufflers. Exhaust resonance is harnessed by this unique layout to boost engine torque and power over a wide rpm range. Throttle response is instantaneous, and fuel economy improved as well.

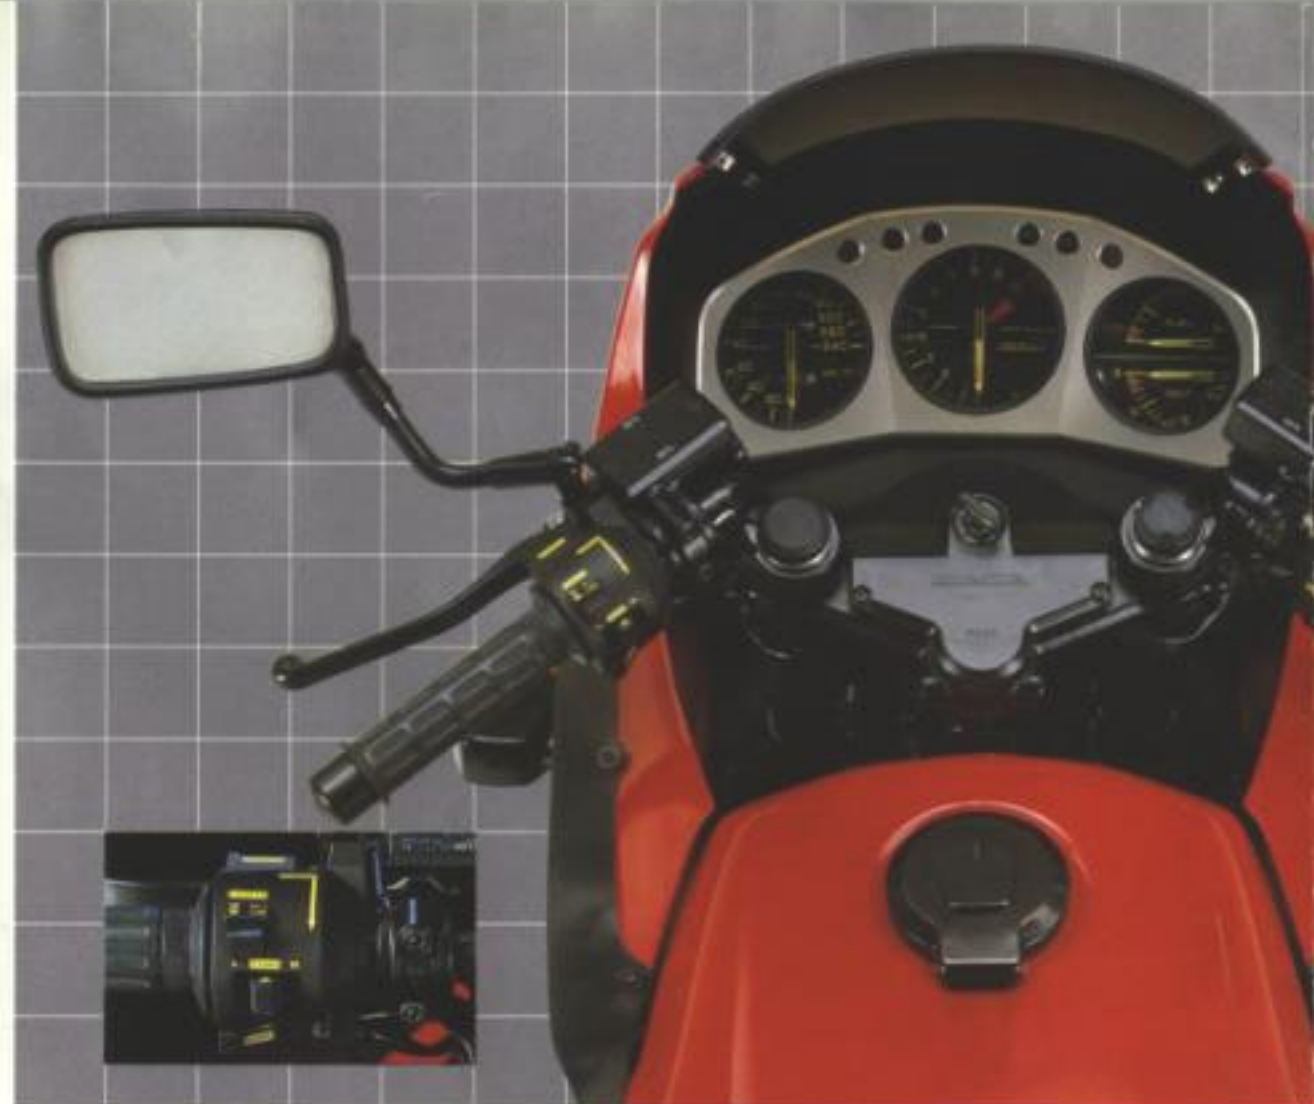

AND FIRST WITH A NUMBER


New Frame Technology & Aerodynamics

The rigid, lightweight frame binding the CBX into an at-the-limits corner tamer is a product of CAD expertise. CAD is short for Computer Aided Design, a means by which basic frame

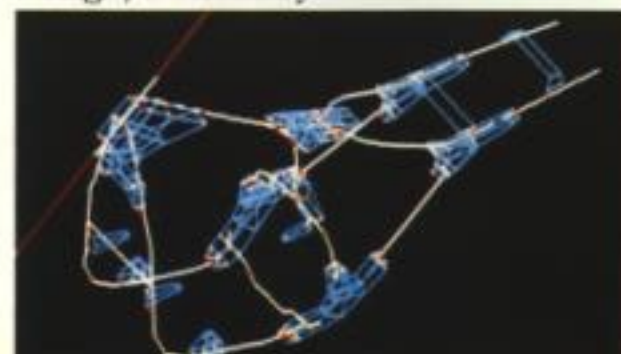

design can be simulated without prototype construction. Differing loading and riding conditions can also be simulated, and the results thus gained are effectively employed in producing a lightweight, rigid frame unit. Aerodynamics was carefully considered in fairing design, and wind tunnel testing extensively employed. The lightweight, wind-cheating fairing and standard under cowl fitted reduce drag and improve steering by reducing front-end lift, and innovative deflectors improve rider comfort and reduce drag and lift.

Adjustable Front & Rear Damping
To be worthy of the title 'Super Sports', and to be capable of running in front of the pack, a true back-road blaster must feature state-of-the-art suspension. The CBX has it.

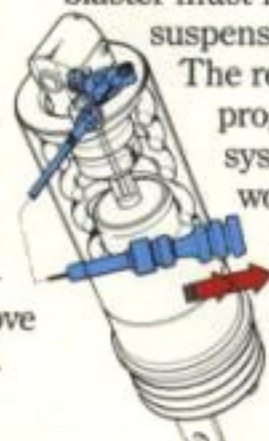


The rear is Pro-Link, Honda's progressive suspension system proven in the heat of world-class competition. 3-way adjustable rebound damping is featured, with a convenient remote adjuster to

simplify changes. The rigid box-section swingarm pivots on low-maintenance, long-life needle roller bearings. Front/rear suspension balance is superb with a 39mm front fork fitted with many suspension innovations. The fork is air-assist and sports 3-way adjustable rebound damping letting suspension action be perfectly matched to road surface and machine loading as well as to individual personal preferences. Front end rigidity is enhanced with a standard aluminium plate fork brace.


Compact switch layout and forged duralumin handlebars.




Powerful, innovative dual headlights.*

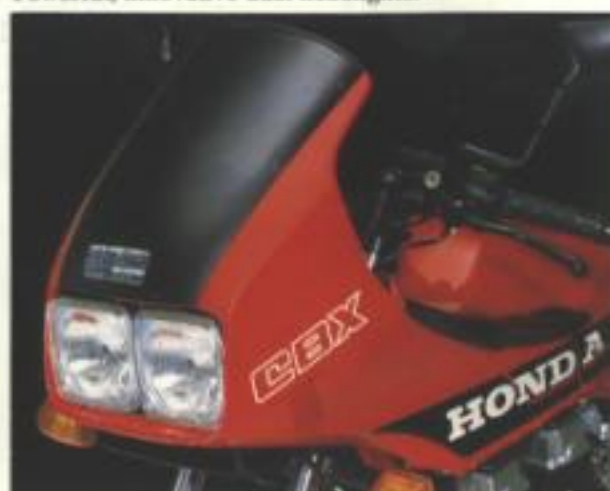


TRAC and double discs with dual-piston calipers.

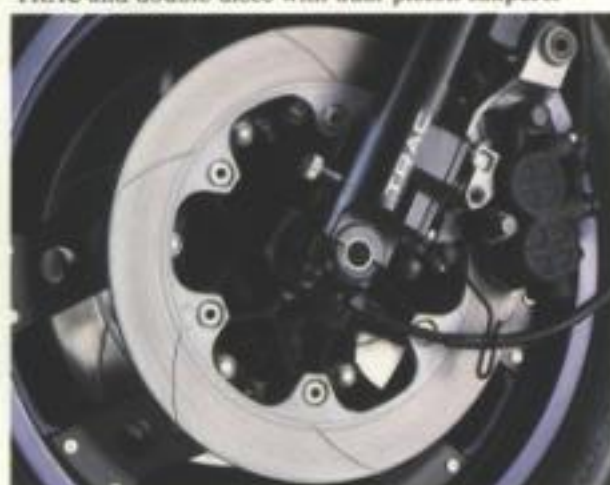

Standard, high-efficiency oil cooler.

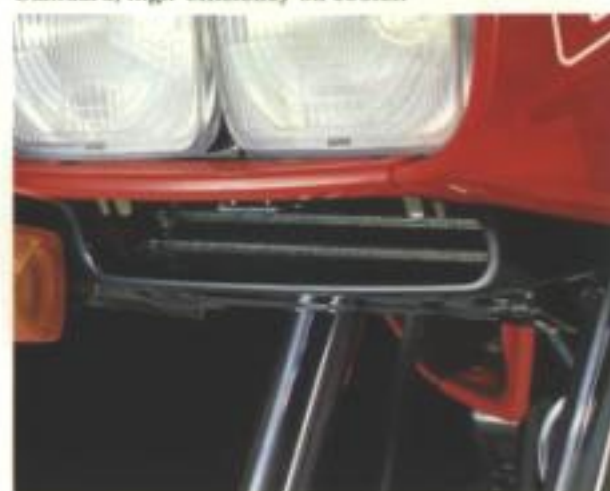


Air-assist, damping adjustable fork with fork brace.

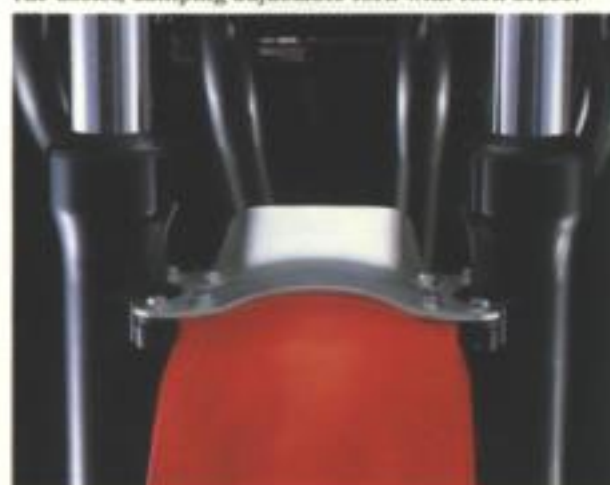

Integrated taillight and aerodynamic design indicators.



Compact, fan-cooled, piggyback ACG.

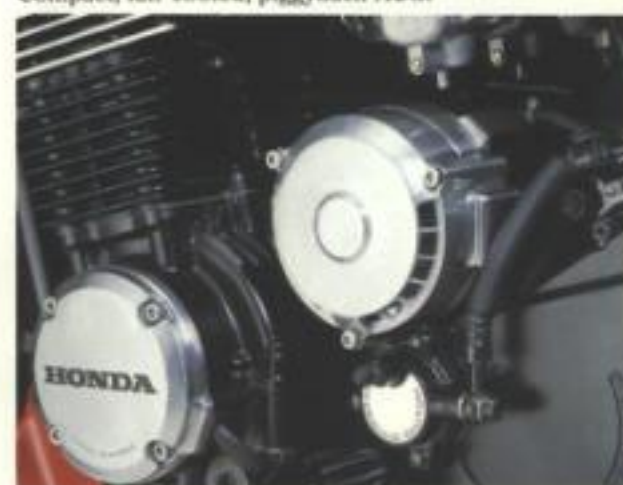


*Some types have single headlight.

OF UNIQUE INNOVATIONS

TRAC & Dual-piston Caliper Braking
Machine attitude changes resulting from sudden weight transfer forward during braking are the bane of the sporting rider. Honda's answer to the problem is TRAC, short for Torque Reactive

Normal oil passage
Bypass passage

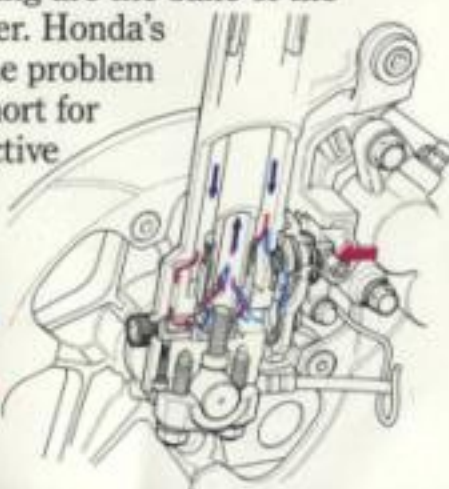

Anti-dive Control. TRAC utilizes torque produced in the pivoted brake caliper to close a valve in the fork, increasing damping. The system is 4-way adjustable to match differing riding conditions and also features automatic override if a bump should be traversed while braking. As brake fluid pressure is not used as the operating medium, brake lever travel and feel remain unaffected. Braking is in the capable hands of triple discs with powerful dual-piston calipers and sintered metal pads.

Specifications (ED type)

Engine	DOHC 4-stroke 16-valve inline four	Ground Clearance	145mm (5.7in)
Bore & Stroke	67 × 53mm (2.64 × 2.09in)	Fuel Capacity	22 liters (5.8 US., 4.8 Imp. gal.)
Displacement	747cm ³ (45.58in ³)	Wheels	Aluminium ComStar
Compression Ratio	9.3 : 1	Tires	Front 110/90-V16
Carburetors	4 × 34mm (1.34in) CV type	Rear 130/80-V18	
Max. Horsepower	91PS/9,500rpm (DIN)	Suspension	Front Air-assist 39mm (1.54in) fork with 3-way adjustable rebound damping, TRAC and fork brace, 150mm (5.91in) travel
Max. Torque	7.1kg-m/8,500rpm (DIN)	Rear	Pro-Link with 3-way remote adjustable rebound damping, 115mm (4.53in) axle travel
Ignition	Transistorized pointless with electronic advance	Brakes	Front Dual discs with dual piston calipers and sintered metal pads
Starter	Electric	Rear	Disc with dual-piston caliper and sintered metal pads
Transmission	6-speed	Dry Weight	218kg (480.6 lb)
Final Drive	'O'-ring lubrication sealed chain		
Dimensions (L × W × H)	2,145 × 740 × 1,240mm (84.4 × 29.1 × 48.8in)		
Wheelbase	1,465mm (57.7in)		
Seat Height	795mm (31.3in)		

Honda machines sold in your area are those most suited to local conditions. Specifications and appearance may differ slightly depending on markets and are subject to change without notice. For details, please consult your nearest Honda dealer.

HONDA[®]
HONDA MOTOR CO., LTD. TOKYO, JAPAN

Ride alert. Dress right. Always wear a helmet
and eye protection. Enjoy safe motorcycling.

Your authorized HONDA dealer:

VAT No. 118-4877-80

HENSTOCKS

100% HONDA SPECIALISTS

124/128 CHESTERFIELD ROAD NORTH

MANFELD, HONG KONG

PHONE 233727

PRINTED IN JAPAN
CROWN LTD. 1982 100000

