
Healthcare System


Design document



Mohamed Sayed SPRINTS

System flowchart:

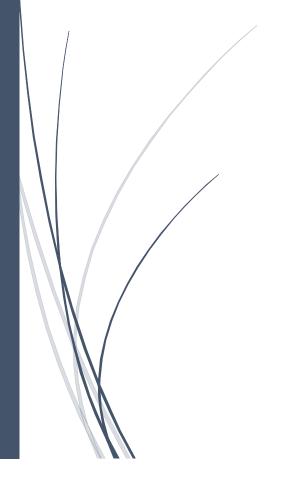

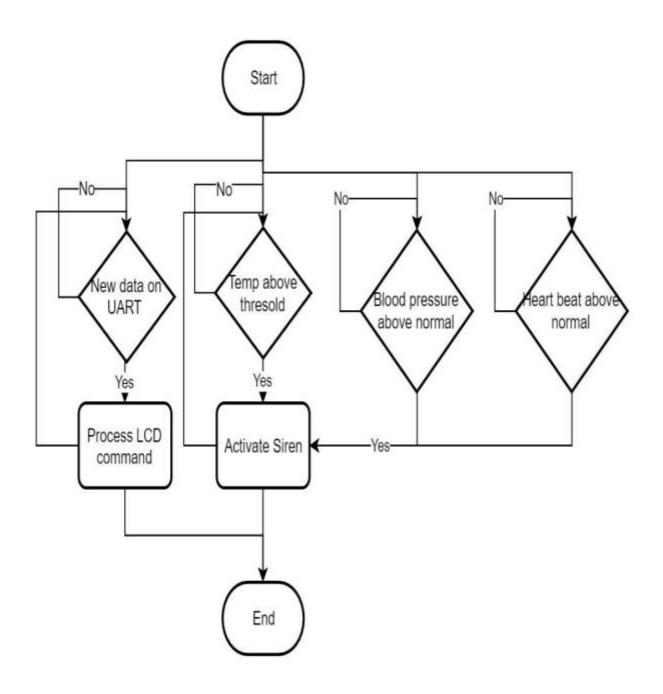

System tasks



Our system needs five tasks

Task parameters

T1: Display

{P:100, E:5, D:100, PRIORITY:1}

{P:100, E:5, D:100, PRIORITY:1 }

T3: heart beat detector

{P:50, E:1.5, D:50, PRIORITY:2}

11.30, E.L.3, D.30, FINDMILLS J

T2: blood pressure sensor

{P:10, E:3, D:10, PRIORITY:3 }

{P:10, E:3, D:10, PRIORITY:3 }

T4: Temperature sensor

{P:5, E:2.5, D:5, PRIORITY:4 }

(P.O, E.Z.O, D.O, PAIUALLY:4)

T5: Alert siren

{P:50, E:1, D:50, PRIORITY:5 }

(r.ou, E.t, D.ou, PAIUAIIT.o)

Comment:

- Tasks have Fixed priorities
- Scheduler is non preemptive
- For task 1 the execution time is equal to reading and processing the LCD command (2ms) + UART time (3ms)
- For task 5 the periodicity equal to 50 to ensure that there are a new data from the sensors in the system

System tick rate



Total execution time for all tasks = 5+3+1.5+2.5+1=13ms , so

The system tick time =20ms

Calculation

Hyperperiod (H) = 100ms
CPU loud =
$$\frac{E1+E2+E3+E4+E5}{H}$$


$$=\frac{(5)+(3*10)+(1.5*2)+(2.5*20)+(1*2)}{100}*100=90\%$$

Comment:


The CPU loud value isn't good, so we can improve this value by decreasing the execution time for the tasks.

Tasks timeline:



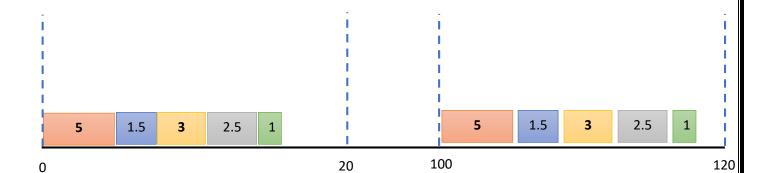


SIMSO Results:

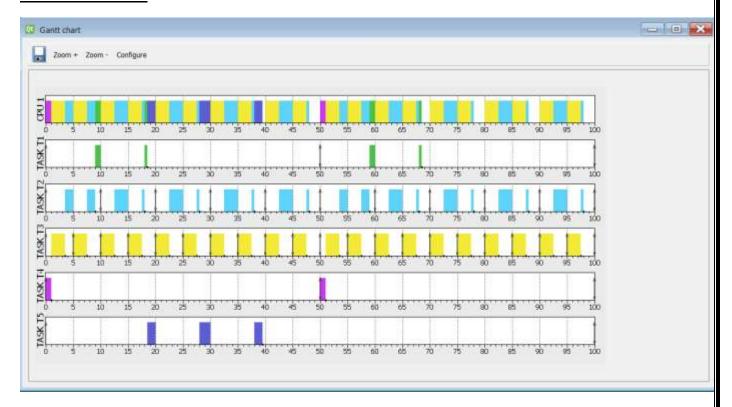

Comment:

From the above figures, we see that all tasks execute without missing their deadline.



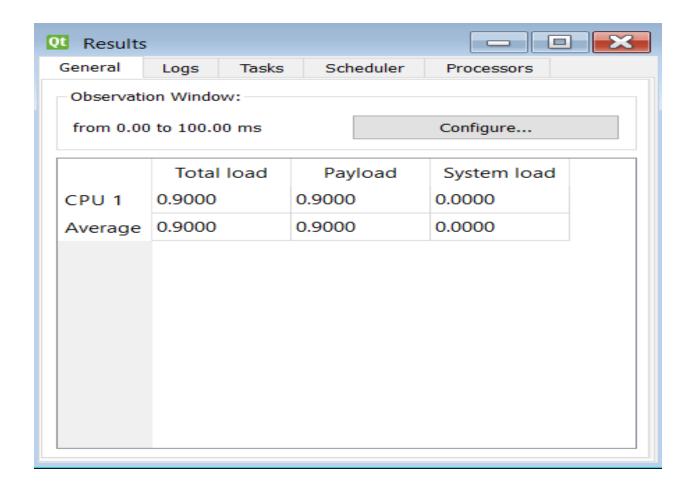

Comment:

We already know from the given task set that the CPU load is (90%) using analytical approach. Also the simulation verifies the same output.