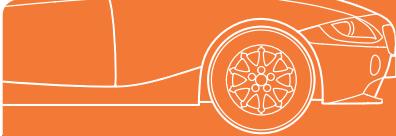


12345678

10000002

**Hankook**  
 driving emotion

**H105** 145/65R15 23Z 72H

**Safety**Excellent Softness •  
 Exceptional Silence • Exquisite

**VENTUS**  
**V4 ES**

\* XL : Extra Load \* RF : Reinforced

**02-558-0222**

12345678


**M+S**
**10000002**

**Hankook**
**WARNING!**

**DEATH OR SERIOUS INJURY MAY RESULT FROM:** (A) a hold-down device or safety cage, or bolt to vehicle axle. (B) Never lean or reach over the tire and rim when inflating. (C) Never inflate above 40 psi to seat beads. (D) After beads are seated, inflate to or adjust to recommended cold operating pressure. (E) Failure to comply with these safety precautions can cause the bead to break and the assembly to burst with sufficient force to cause serious injury or death.

**WARNING!**

**TIRE MOUNTING INSTRUCTIONS:** 1. Follow RMA installation safety procedures for mounting and inflating tires. (Available from RMA, 1400 K Street N.W., Washington, DC 20005) 2. Always lubricate both beads and rim flanges with approved rubber lubricant. 3. Always match rim diameter with tire diameter. Mount tire only on proper size rim. 4. Never mount a 16" tire on a 16.5" rim, it can cause severe injury or death. 5. Never inflate a tire that is lying on the floor or same axle. Follow manufacturer's recommendations.