




MAXICARGER AC COMPACT



Quick Reference Guide

www.autelenergy.com

Thank you for purchasing this AUTEL product. Our equipment is manufactured to a high standard and — when used according to these instructions and properly maintained — will provide years of trouble-free performance.



Download Detailed Manual



Download Autel App



Find PIN Code

! IMPORTANT:

Before operating or maintaining this equipment, please read these instructions carefully and pay extra attention to the safety warnings and precautions. Failing to use this product properly may cause damage and/or personal injury and will void the product warranty.


! WARNING

- This equipment should only be installed by a licensed electrician in accordance with all local codes and ordinances.
- This equipment must be grounded through a permanent wiring system or an equipment-grounding conductor.
- Do not install or use this equipment near flammable, explosive, harsh, or combustible materials, chemicals or vapors.
- Children should be supervised when around this equipment.
- Do not insert fingers or foreign objects into the electric vehicle connector.
- Use copper conductors only.
- Do not operate the equipment outside its operating temperature range of -30 to 50 °C.
- Incorrect installation and testing of the equipment could potentially damage the vehicle's battery, components, and/or the equipment itself.
- Handle the equipment with care during transportation. Do not subject it to strong force or impact or pull, twist, tangle, drag or step on the equipment, to prevent damage to it or any components.
- Neutral must be bonded to Ground upstream at the transformer or panel for each separately derived system.
- If any specifications or regulations mentioned in this document contradict with your local rules, refer to your local rules.


Tools (not included in the package) you may need

Scissors	
Power Drill	
Wire Stripper	
Torque Driver (2 N·m)	
Drill Bit (8 mm)	
Cross Bit (PH2)	
Step Bit (30 mm)	
Tape Measure	
Marker	
Multimeter	

Dimensions (mm)

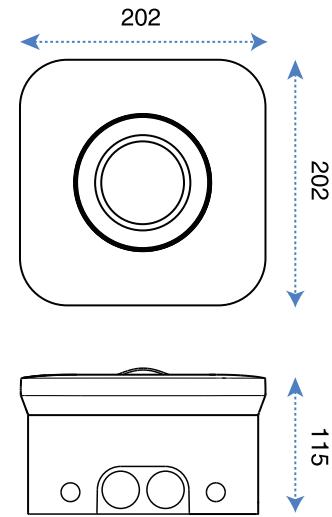


Installation Considerations

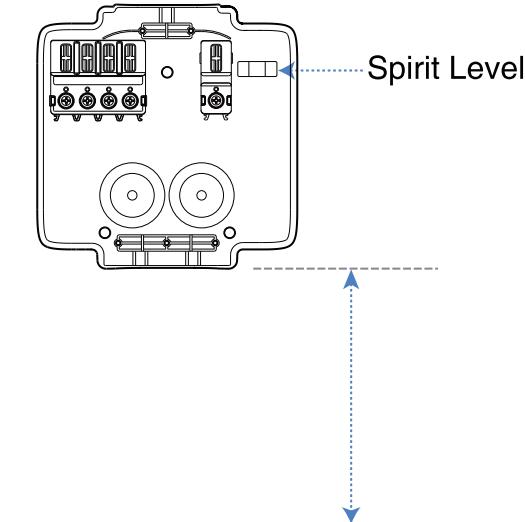


Recommended: 850–1150 mm
(For ADA Accessibility: 700–850 mm)

1


A: AC Input Cable Entry
B: Ethernet Cable Entry

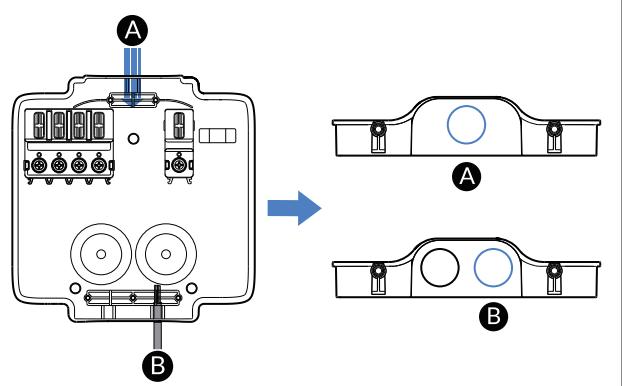


2



3





4

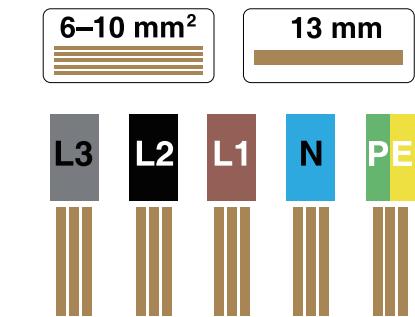

1-phase Wiring

2 N·m



2 N·m




3-phase Wiring

2 N·m






2 N·m



5

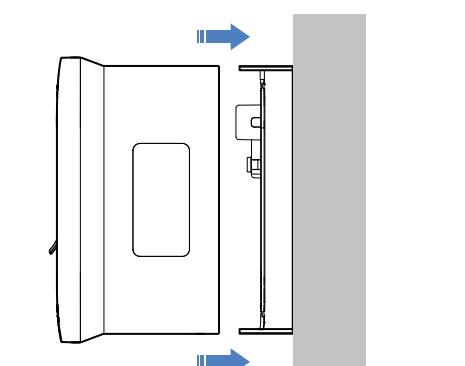

2 N·m

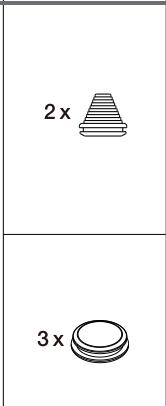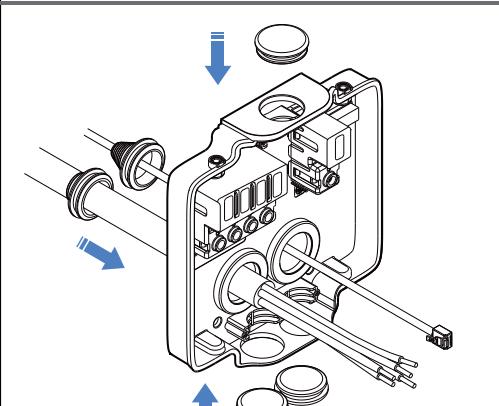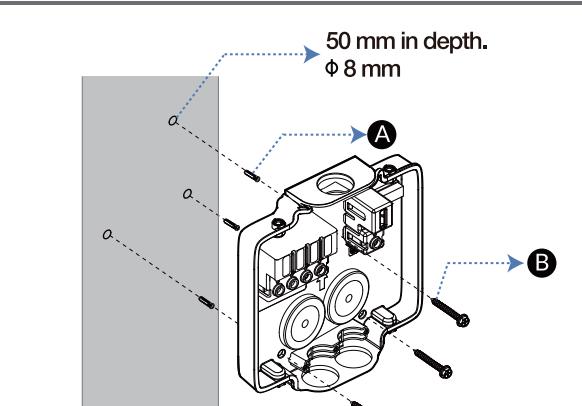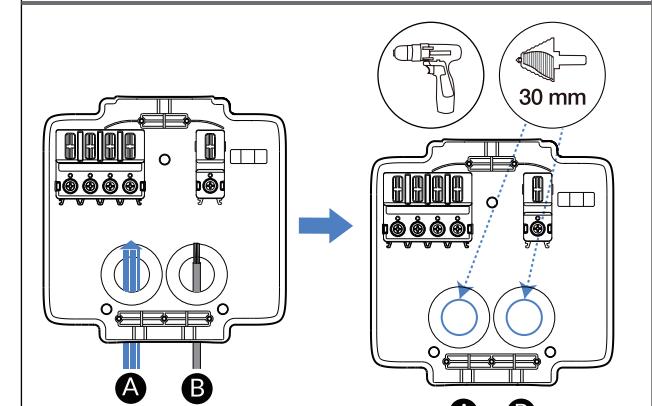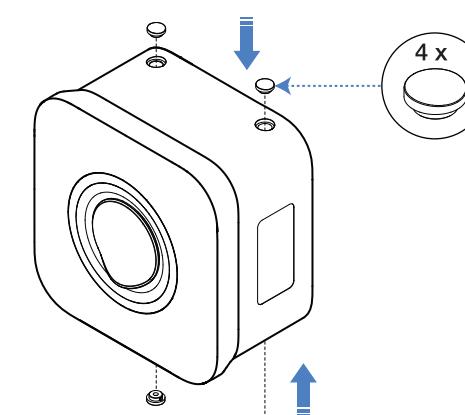

NOTE: The illustrations in this document are for reference only.

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
					REV	POSITION	DATE



正反印刷
风琴折后再对折

RELEASE LEVEL:
FILE NAME:

& PROL RELEASE
MODEL NAME

颜色	备注
PANTONE BLACK	风琴折后再对折

注：AUTEL设计部不指定供应商。效果做到参考样品一致即可。

AUTEL 道通科技股份有限公司 Autel Intelligent Technolog Corp.,Ltd.			TITLE: 快速指引	
These Drawings And Specification Are The Property Of AUTEL, And Shall NOT Be Reproduced Copied Or Used In Any Manner Without The Prior Written Consent Of AUTEL			DRAW: 何群	UNIT'S: 440x215mm
			CHKD: 刘贻妃	FINISH:
			STAD:	MASS(Kg):
			APPD: 李伟斯	SCALE:
PROJ		SHEET: 1 OF 1	PRODUCT: 欧标极致家用	Material: 128g 双铜纸 4C印刷
6				

A3

1 2 3 4 5 6 7 8