

MU5MES01

Nonlinear structural mechanics by the finite element method.

Introduction to nonlinear elasticity



Claire Lestringant, lecture material adapted from Corrado Maurini

Table of Content

- ① Introduction
- ② Linear Algebra
- ③ Kinematics
- ④ Statics
- ⑤ Constitutive laws
- ⑥ Derivatives
- ⑦ Variational Formulation
- ⑧ Recent research on instability in hyperelastic solids


Introduction

Nonlinear elasticity



Hyperelastic blocs in large deformations
(Bigoni, 2012, Tallinen et al., 2013)

Nonlinear elasticity

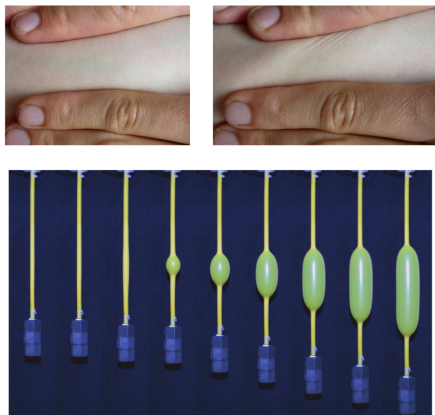

Biological tissue, Elastomers, Gels
(Ciarletta et al., 2012, Wang et al., 2018)

Table of Content

- ① Introduction
- ② Linear Algebra
- ③ Kinematics
- ④ Statics
- ⑤ Constitutive laws
- ⑥ Derivatives
- ⑦ Variational Formulation
- ⑧ Recent research on instability in hyperelastic solids

Linear Algebra

1. Tensor algebra: basic notation

- $\underline{a}, \underline{b}, \underline{c} \in \mathbb{V}$: vectors in \mathcal{R}^3
- $b = \{\underline{e}_1, \underline{e}_2, \underline{e}_3\}$: orthonormal basis in $\mathbb{V} \equiv \mathcal{R}^3$
- $\underline{\underline{A}}, \underline{\underline{B}}, \underline{\underline{C}} \in \text{Lin}$: second order tensors from \mathcal{R}^3 to \mathcal{R}^3
- Component representation in b (repeated indices are summed):

$$\begin{aligned}\underline{a} &= a_i \underline{e}_i, & a_i &= \underline{a} \cdot \underline{e}_i \\ \underline{\underline{A}} &= A_{ij} \underline{e}_i \otimes \underline{e}_j, & A_{ij} &= (\underline{\underline{A}} \underline{e}_i) \cdot \underline{e}_j\end{aligned}$$

Tensor algebra: geometrical interpretation of basic operations

Let be $(\underline{a}, \underline{b}, \underline{c})$ three vectors, being θ the angle between \underline{a} and \underline{b} , ϕ the angle between \underline{c} and the normal \underline{n} to the plane defined by $(\underline{a}, \underline{b})$

Scalar product:

$$\underline{a} \cdot \underline{b} = a_i b_i = \|\underline{a}\| \|\underline{b}\| \cos \theta$$

- **Length** of a vector: $\|\underline{a}\| = \sqrt{\underline{a} \cdot \underline{a}} = \sqrt{a_i a_i}$
- **Angle** between two vectors: $\cos \theta = \frac{\underline{a} \cdot \underline{b}}{\sqrt{(\underline{a} \cdot \underline{a})(\underline{b} \cdot \underline{b})}}$

Vector product:

$$\underline{a} \times \underline{b} = \epsilon_{ijk} a_i b_j \underline{e}_k = \|\underline{a}\| \|\underline{b}\| \sin \theta \underline{n}, \quad \underline{n} \perp (\underline{a}, \underline{b})$$

- **Surface** of the parallelogram defined by \underline{a} and \underline{b} : $\|\underline{a} \times \underline{b}\|$.

Triple product:

$$\underline{c} \cdot (\underline{a} \times \underline{b}) = \epsilon_{ijk} a_i b_j c_k = \|\underline{a}\| \|\underline{b}\| \|\underline{c}\| \sin \theta \cos \phi = \det \begin{bmatrix} a_1 & a_2 & a_3 \\ b_1 & b_2 & b_3 \\ c_1 & c_2 & c_3 \end{bmatrix}.$$

- **Volume** of the parallelepiped defined by \underline{a} , \underline{b} , \underline{c} : $\underline{c} \cdot (\underline{a} \times \underline{b})$.

Second order tensors: basic operations

- **Lin**: space of linear applications from \mathcal{R}^3 to \mathcal{R}^3 .
- $\underline{\underline{A}}$ transforms a vector into another vector: $\underline{c} = \underline{\underline{A}}\underline{b}$
- **Tensor product** between two vectors:

$$(\underline{a} \otimes \underline{b})\underline{c} = (\underline{b} \cdot \underline{c})\underline{a}$$

- **Transpose**:

$$\underline{\underline{A}}\underline{a} \cdot \underline{b} = \underline{a} \cdot \underline{\underline{A}}^T \underline{b}, \quad \underline{\underline{A}}^T_{ij} = \underline{\underline{A}}_{ji}$$

- **Determinant**

- $\det(\underline{\underline{A}}) = \det(A_{ij})$
- $\det(\underline{\underline{AB}}) = \det(\underline{\underline{A}}) \det(\underline{\underline{B}})$, $\det(\underline{\underline{I}} + \underline{a} \otimes \underline{b}) = 1 + \underline{a} \cdot \underline{b}$
- The **determinant** gives the **change of volume** of the parallelepiped defined by $(\underline{a}, \underline{b}, \underline{c})$ under the action of $\underline{\underline{A}}$:

$$\underline{\underline{Ac}} \cdot (\underline{\underline{Aa}} \times \underline{\underline{Ab}}) = \det(\underline{\underline{A}}) \underline{c} \cdot (\underline{a} \times \underline{b})$$

Second order tensors: subspaces of Lin

- **sym** $\equiv \{ \underline{\underline{A}} \in \text{Lin}, \underline{\underline{A}} = \underline{\underline{A}}^T \} :$ $\underline{\underline{A}}\underline{\underline{a}} \cdot \underline{\underline{b}} = \underline{\underline{a}} \cdot \underline{\underline{A}}\underline{\underline{b}}$
- **skw** $\equiv \{ \underline{\underline{A}} \in \text{Lin}, \underline{\underline{A}} = -\underline{\underline{A}}^T \}$ $\underline{\underline{A}}\underline{\underline{a}} \cdot \underline{\underline{b}} = -\underline{\underline{a}} \cdot \underline{\underline{A}}\underline{\underline{b}}$
- **orth** $\equiv \{ \underline{\underline{Q}} \in \text{Lin}, \underline{\underline{Q}}^T = \underline{\underline{Q}}^{-1} \} :$ $\underline{\underline{Q}}\underline{\underline{a}} \cdot \underline{\underline{Q}}\underline{\underline{b}} = \underline{\underline{a}} \cdot \underline{\underline{b}}$
- **orth**⁺ $\equiv \{ \underline{\underline{Q}} \in \text{Lin}, \underline{\underline{Q}}^T = \underline{\underline{Q}}^{-1}, \det(\underline{\underline{Q}}) > 0 \}$, rotations
- **orth**⁻ $\equiv \{ \underline{\underline{Q}} \in \text{Lin}, \underline{\underline{Q}}^T = \underline{\underline{Q}}^{-1}, \det(\underline{\underline{Q}}) < 0 \}$, reflections

Second order tensors: two important theorems

Spectral decomposition of a symmetric tensor

For every $\underline{\underline{A}} \in \text{sym}$, exists \underline{a}_i and $\alpha_i \in \mathcal{R}$ such that

$$\underline{\underline{A}}\underline{a}_i = \alpha_i \underline{a}_i, \quad \underline{\underline{A}} = \alpha_1(\underline{a}_1 \otimes \underline{a}_1) + \alpha_2(\underline{a}_2 \otimes \underline{a}_2) + \alpha_3(\underline{a}_3 \otimes \underline{a}_3)$$

Definition: square root of a symmetric tensor (definition):

Considering the spectral decomposition of $\underline{\underline{A}} \in \text{sym}$, positive definite

$$\sqrt{\underline{\underline{A}}} = \sqrt{\alpha_1}(\underline{a}_1 \otimes \underline{a}_1) + \sqrt{\alpha_2}(\underline{a}_2 \otimes \underline{a}_2) + \sqrt{\alpha_3}(\underline{a}_3 \otimes \underline{a}_3)$$

Polar decomposition of a positive definite tensor

For every $\underline{\underline{A}}$ such that $\det(\underline{\underline{A}}) > 0$, there exist unique $\underline{\underline{U}}, \underline{\underline{V}} \in \text{sym}$ and $\underline{\underline{R}} \in \text{orth}^+$ such that:

$$\underline{\underline{A}} = \underline{\underline{R}}\underline{\underline{U}} = \underline{\underline{V}}\underline{\underline{R}}, \quad \underline{\underline{U}} = \sqrt{\underline{\underline{A}}^T \underline{\underline{A}}}, \quad \underline{\underline{V}} = \sqrt{\underline{\underline{A}} \underline{\underline{A}}^T}.$$

Kinematics

2. Kinematics: finite transformations

Table of content

① Transformations

- Jacobian, homogeneous transformations
- Transformation of line element, volume element, surface element

② Deformations


- Change of lengths (stretching) and angles (shearing)
- Cauchy and Green-Lagrange deformation tensors
- Rigid transformations
- Polar decomposition in rigid transformation and pure deformation
- Overview of the possible measures of deformations: $\underline{\underline{C}}$, $\underline{\underline{E}}$, $\underline{\underline{U}}$, $\underline{\underline{\epsilon}}$

③ Movements

- Lagrangian description, velocity, acceleration
- Eulerian velocity field and deformation rate.

2. Kinematics: finite transformations

Transformations

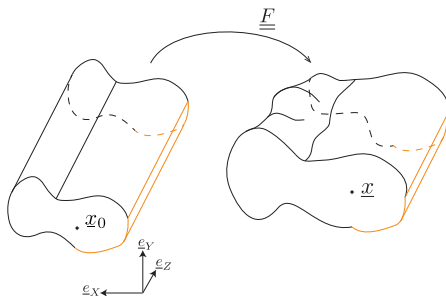

Transformation gradient: $\underline{\underline{F}} = \frac{\partial \underline{x}}{\partial \underline{x}_0}$

- Line element: $d\underline{x} = \underline{\underline{F}} d\underline{x}_0$
- Volume element: $|\Omega| = J |\Omega_0| \quad J = \det \underline{\underline{F}}$ (Jacobian)
- Surface element: $\underline{n} dS = J \underline{\underline{F}}^{-T} \underline{n}_0 dS_0$

2. Kinematics: finite transformations

Deformations

Deformation measures:


- $\underline{\underline{C}} = \underline{\underline{F}}^T \underline{\underline{F}}$, **Cauchy stretch tensor** (Lagrangian)
change of (squared) length: $d\underline{x} \cdot d\underline{x} = d\underline{x}_0 \cdot \underline{\underline{C}} d\underline{x}_0$
- $\underline{\underline{E}} = (\underline{\underline{C}} - \underline{\underline{I}})/2$, **Green-Lagrange** (Lagrangian)
cancels for rigid transformations
- $\underline{\underline{U}} = \sqrt{\underline{\underline{F}}^T \underline{\underline{F}}}$

Exercise: Show that $\underline{\underline{E}} \approx \underline{\underline{\varepsilon}}$ for small transformations (linearised strain).

Polar decomposition

For every $\underline{\underline{F}}$ ($\det(\underline{\underline{F}}) > 0$), there exist unique $\underline{\underline{U}}, \underline{\underline{V}} \in \text{sym}$ and $\underline{\underline{R}} \in \text{orth}^+$ such that:

$$\underline{\underline{F}} = \underline{\underline{R}}\underline{\underline{U}} = \underline{\underline{V}}\underline{\underline{R}}, \quad \underline{\underline{U}} = \sqrt{\underline{\underline{F}}^T \underline{\underline{F}}}, \quad \underline{\underline{V}} = \sqrt{\underline{\underline{F}} \underline{\underline{F}}^T}.$$

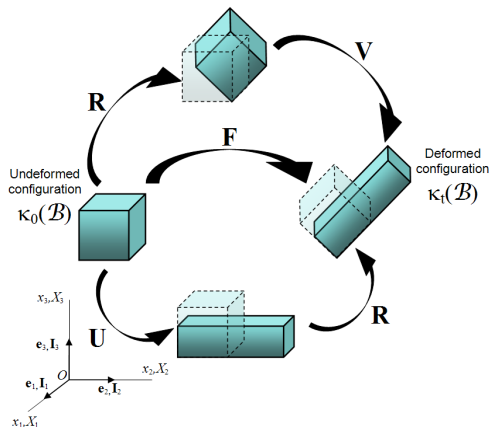

Kinematics: cheatsheet

- $\underline{x} = \underline{f}(\underline{x}_0)$: transformation.
- $\underline{\underline{F}} = \underline{\nabla} \underline{f}$: gradient of the transformation (Lagrangian-Eulerian)
- $\underline{\underline{F}} = \underline{\underline{R}} \underline{\underline{U}}$, $\underline{\underline{U}} = \sqrt{\underline{\underline{F}}^T \underline{\underline{F}}}$, polar decomposition in rigid rotation and pure deformation.
- Deformation measures:
 - $\underline{\underline{C}} = \underline{\underline{F}}^T \underline{\underline{F}}$, Cauchy stretch tensor (Lagrangian)
 - $\underline{\underline{E}} = (\underline{\underline{C}} - \underline{\underline{I}})/2$, Green-Lagrange (Lagrangian)
 - $\underline{\underline{U}} = \sqrt{\underline{\underline{F}}^T \underline{\underline{F}}}$
- Rigid transformation: $\underline{x} = \underline{\underline{Q}}(\underline{x}_0 - \underline{c}) + \underline{v}$, $\underline{\underline{Q}} \in \text{orth}^+$
- $\underline{v}(\underline{x}, t) = \frac{\partial \underline{x}}{\partial t}$ Eulerian velocity field.
- $\underline{\underline{L}} = \underline{\underline{\text{grad}}}(\underline{v}) = \frac{\partial \underline{v}}{\partial \underline{x}} = \underline{\underline{D}} + \underline{\underline{W}}$, strain rates.
- $\underline{\dot{\underline{F}}} = \underline{\underline{L}} \underline{\underline{F}}$, $\underline{\dot{\underline{E}}} = \underline{\underline{F}}^T \underline{\underline{D}} \underline{\underline{F}}$
- $\rho J = \rho_0$ (mass balance)

Statics

3. Statics

Summary

① Equilibrium equations and stress tensors

- Eulerian description, Cauchy stress tensor
- Lagrangian description, first and second Piola-Kirchhoff stress tensors

② Power balance

- Power of external forces and energy balance
- Duality (in the sense of power) between stress and strain measures

Equilibrium: Eulerian description

(We follow the notation in Bigoni for the stress tensors).

- Cauchy stress tensor (usually noted as $\underline{\underline{\sigma}}$)

$$\underline{\underline{\sigma}} : \underbrace{\underline{n}}_{\text{normal in } \partial\Omega} \rightarrow \underbrace{\underline{t} = \underline{\underline{\sigma}} \underline{n}}_{\text{force/surface in } \Omega}$$

- Equilibrium equations:

$$\begin{aligned} \operatorname{div} \underline{\underline{\sigma}} + \underline{b} &= 0 \quad \text{on } \Omega \\ \underline{\underline{\sigma}} \underline{n} &= \underline{g} \quad \text{on } \partial_g \Omega \end{aligned}$$

- The fundamental issue here is that the deformed configuration Ω is part of the unknowns of the problems.

Equilibrium: Lagrangian description

- First Piola-Kirchhoff (Boussinesq) stress tensor (Lagrangian-Eulerien):

$$\underline{\underline{P}} : \underbrace{\underline{n_0}}_{\text{normal on } \Omega_0} \rightarrow \underbrace{\underline{t} ds}_{\text{force/surface on } \Omega} = \underline{\underline{P}} \underline{n_0} ds_0, \quad \boxed{\underline{\underline{P}} = J \underline{\underline{\sigma}} \underline{\underline{F}}^{-T}}$$

- Equilibrium equations:


$$\begin{aligned} \text{Div } \underline{\underline{P}} + \underline{b_0} &= 0 \quad \text{on } \Omega_0 \\ \underline{\underline{P}} \underline{n_0} &= \underline{g_0} \quad \text{on } \partial_g \Omega_0 \end{aligned}$$

- Second Piola-Kirchhoff stress tensor (purely Lagrangian).

$$\boxed{\underline{\underline{S}} = \underline{\underline{F}}^{-1} \underline{\underline{P}} = \underline{\underline{F}}^{-1} J \underline{\underline{\sigma}} \underline{\underline{F}}^{-T}}$$

- $\underline{\underline{P}} \notin \text{sym}$, but $\underline{\underline{P}} \underline{\underline{F}}^T = \underline{\underline{F}} \underline{\underline{P}}^T$
- $\underline{\underline{S}} \in \text{sym}$

Stress tensors

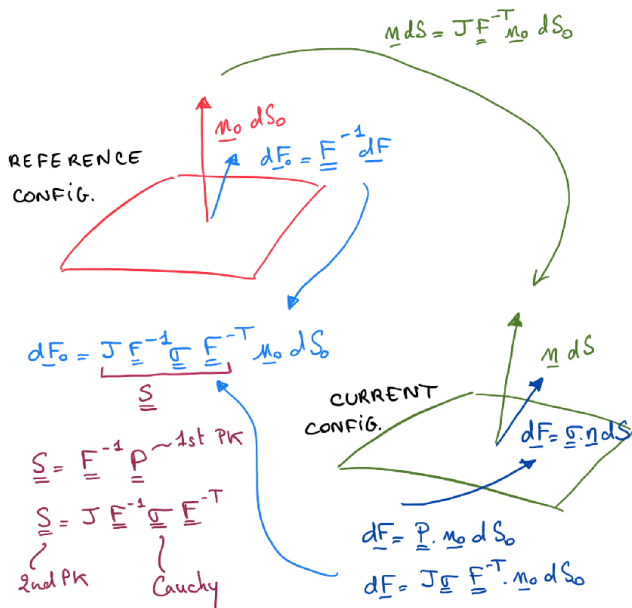

Stress power and power balance

- Stress power (or internal power or *puissance des efforts interieurs*)

$$\mathcal{P}_{int} = \int_{\Omega} \underline{\underline{\sigma}} : D \, dx = \int_{\Omega_0} \underline{\underline{P}} : \underline{\underline{\dot{F}}} \, dx_0 = \int_{\Omega_0} \underline{\underline{S}} : \underline{\underline{\dot{E}}} \, d\underline{\underline{x}}_0$$

- Power balance (Eulerian version)

$$\underbrace{\int_{\Omega} \underline{b} \cdot \underline{v} \, dx + \int_{\partial\Omega} \underline{g} \cdot \underline{v} \, ds}_{\text{Puissance externe}} = \underbrace{\int_{\Omega} \underline{\underline{\sigma}} : D \, dx}_{\text{Puissance interne}} + \frac{d}{dt} \underbrace{\int_{\Omega} \frac{\rho}{2} \underline{v} \cdot \underline{v} \, dx}_{\text{Energie cinétique}}$$

- Power balance (Lagrangian version)

$$\underbrace{\int_{\Omega_0} \underline{b}_0 \cdot \underline{\dot{x}} \, dx_0 + \int_{\partial\Omega_0} \underline{g}_0 \cdot \underline{\dot{x}} \, ds_0}_{\text{Puissance externe}} = \underbrace{\int_{\Omega_0} \underline{\underline{P}} : \underline{\underline{\dot{F}}} \, dx_0}_{\text{Puissance interne}} + \frac{d}{dt} \underbrace{\int_{\Omega_0} \frac{\rho_0}{2} \underline{\dot{x}} \cdot \underline{\dot{x}} \, dx_0}_{\text{Energie cinétique}}$$

The strain work per unit of volume in the reference configuration can be written in the following form:

$$\boxed{\underline{\underline{P}} : \underline{\underline{\dot{F}}} = \underline{\underline{S}} : \underline{\underline{\dot{E}}} = J \underline{\underline{\sigma}} : \underline{\underline{D}}}$$

Statics: summary

- Stress measures:
 - $\underline{\underline{\sigma}}$ Cauchy stress tensor (Eulerian)
 - $\underline{\underline{P}} = J \underline{\underline{\sigma}} \underline{\underline{F}}^{-T}$ First Piola-Kirchhoff stress tensor (Lagrangian-Eulerian).
 - $\underline{\underline{S}} = \underline{\underline{F}}^{-1} \underline{\underline{P}}$ Second Piola-Kirchhoff stress tensor (Lagrangian).
- $\underline{\underline{P}} \underline{\underline{F}}^T = \underline{\underline{F}} \underline{\underline{P}}^T$
- $\underline{\text{Div}}(\underline{\underline{P}}) + \underline{\underline{b}}_0 = 0$ on Ω_0 , $\underline{\underline{P}} \underline{\underline{n}}_0 = \underline{\underline{g}}_0$ on $\partial_f \Omega_0$ (Lagrangian equilibrium)
- $\underline{\text{div}}(\underline{\underline{\sigma}}) + \underline{\underline{b}} = 0$ on Ω , $\underline{\underline{\sigma}} \underline{\underline{n}} = \underline{\underline{g}}$ on $\partial_f \Omega$ (Eulerian equilibrium)
- Stress power: $\mathcal{P}_{int} = \int_{\Omega} \underline{\underline{\sigma}} : \underline{\underline{D}} dx = \int_{\Omega_0} \underline{\underline{P}} : \dot{\underline{\underline{F}}} dx_0 = \int_{\Omega_0} \underline{\underline{S}} : \dot{\underline{\underline{E}}} d\underline{\underline{x}}_0$

Table of Content

- ① Introduction
- ② Linear Algebra
- ③ Kinematics
- ④ Statics
- ⑤ Constitutive laws
- ⑥ Derivatives
- ⑦ Variational Formulation
- ⑧ Recent research on instability in hyperelastic solids

Constitutive laws

Hyperelastic materials

- **Internal energy** density (we consider isothermal process):

$$W_F(\underline{\underline{F}}) = W_E(\underline{\underline{E}})$$

- **Hyperlastic materials do not dissipate energy**, so for any admissible deformation rate $\underline{\underline{\dot{F}}}$ (or $\underline{\underline{\dot{E}}}$) stress power and variation of the internal energy must coincide:

$$\underline{\underline{P}} : \underline{\underline{\dot{F}}} = \frac{\partial W}{\partial \underline{\underline{F}}} : \underline{\underline{\dot{F}}} \Rightarrow \boxed{\underline{\underline{P}} = \frac{\partial W}{\partial \underline{\underline{F}}}} \text{ and similarly } \boxed{\underline{\underline{S}} = \frac{\partial W}{\partial \underline{\underline{E}}}} = \underline{\underline{F}}^{-1} \underline{\underline{P}}$$

- In hyperelastic materials **the strain energy is a state function** and the work required to pass from a deformation state $\underline{\underline{F}}_1$ to $\underline{\underline{F}}_2$ does not depend on the path.

Properties of the energy function

- **Objectivity** (the energy is invariant for rigid rotations):
 W can be defined in terms of $\underline{\underline{F}}$, $\underline{\underline{E}}$, $\underline{\underline{C}}$ with suitable change of variables, e.g.:

$$W_F(\underline{\underline{F}}) = W_C(\underline{\underline{F}}^T \underline{\underline{F}}) = W_E \left(\frac{\underline{\underline{F}}^T \underline{\underline{F}} - \underline{\underline{I}}}{2} \right),$$

When written in terms of $\underline{\underline{C}}$ or $\underline{\underline{E}}$ automatically verifies the objectivity.

- Note that

$$\frac{\partial W_F}{\partial \underline{\underline{F}}} = \frac{\partial W_E}{\partial \underline{\underline{E}}} \frac{\partial \underline{\underline{E}}}{\partial \underline{\underline{F}}} = \underline{\underline{F}} \frac{\partial W_E}{\partial \underline{\underline{E}}} = 2 \underline{\underline{F}} \frac{\partial W_C}{\partial \underline{\underline{C}}}$$

- With an abuse of notation, we will often omit the subscript, e.g. write $W(\underline{\underline{E}})$ instead of $W_E(\underline{\underline{E}})$.

Properties of the energy function

- The well-posedness of the hyperelastic problem requires the energy to be **quasi-convex**:

$$\int_{\Omega_0} W(\underline{\underline{F}} + \underline{\underline{\nabla}} \underline{\underline{u}}) dx_0 \geq \int_{\Omega_0} W(\underline{\underline{F}}) dx_0, \quad \forall \underline{\underline{u}} \text{ reg.}$$

- A “good” energy should verify the **growth conditions**:

$$\det \underline{\underline{F}} \rightarrow (0^+, \infty) \Rightarrow W(\underline{\underline{F}}) \rightarrow \infty.$$

Examples:

- An energy that is **polyconvex** and satisfy the growth condition:

$$W_F(\underline{\underline{F}}) = \frac{\mu}{2} (\text{tr}(\underline{\underline{F}}^T \underline{\underline{F}}) - 3) - 2\mu \ln J + \frac{\lambda}{2} \ln J^2$$

- An energy function that is **not polyconvex** and do not verify the growth condition:

$$W_E(E) = \frac{\lambda}{2} (\text{tr} \underline{\underline{E}})^2 + \mu \underline{\underline{E}} : \underline{\underline{E}}$$

Hyperelastic materials: example of compressible laws

- **Kirchhoff-Saint Venant** model:

$$W_E(\underline{\underline{E}}) = \frac{\lambda}{2}(\text{tr} \underline{\underline{E}})^2 + \mu \underline{\underline{E}} : \underline{\underline{E}}$$


- It is a direct extension of linear elastic behaviour
 - The energy is finite for $\det \underline{\underline{F}} \rightarrow 0^+, \infty$. The problem is not well-posed for large deformations.
 - Frequently used in the large-displacement small-deformations regime (e.g. slender structures such as beam and plates).
- **Neo-Hookean** model :

$$W_F(\underline{\underline{F}}) = \frac{\mu}{2}(\text{tr}(\underline{\underline{F}}^T \underline{\underline{F}}) - 3) - 2\mu \ln J + \frac{\lambda}{2} \ln J^2$$

- The energy is polyconvex and compressible, with $W_F(\underline{\underline{F}}) \rightarrow \infty$ pour $\det \underline{\underline{F}} \rightarrow 0^+, \infty$.
- Largely used for slightly compressible materials.

Example: non-convex energy density

$$W(\epsilon) = W_E(\underline{\underline{\tilde{E}}}) \quad \text{with} \quad \underline{\underline{\tilde{E}}} = \begin{pmatrix} \frac{(1+\epsilon)^2-1}{2} & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

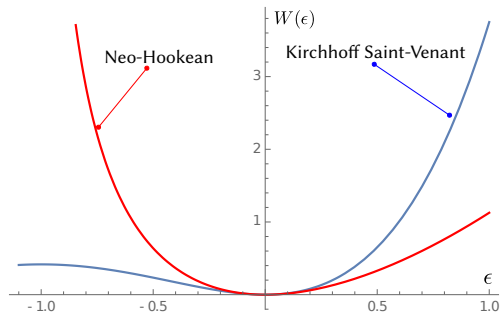

Example: traction in plane-strain

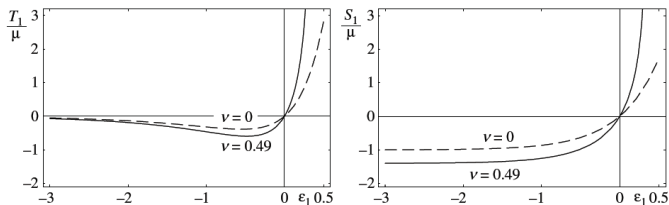


Figure 5.8. Uniaxial plane strain tension and compression of a Kirchhoff–Saint Venant material. Axial Cauchy T_1 and nominal S_1 stress (normalised through division by μ) versus the logarithmic strain ϵ_1 . Two values of Poisson's ratio have been considered, namely, $\nu = 0$ and $\nu = 0.49$. In tension, the material becomes progressively stiff, and the stress becomes infinite when the transversal stretch tends to zero. In compression, the material exhibits softening.

from Bigoni, Nonlinear solid mechanics

Derivatives

Derivatives

The **directional derivative** $f'(u)(v)$ of a function $f : u \rightarrow f(u)$ is found using the following definition, that can be applied to scalar, vector, tensor valued function of scalar, vector, tensor fields:

$$Df(u)[v] = f'(u)(v) = \left. \frac{d}{dh} f(u + hv) \right|_{h=0}$$

Derivative of the determinant

Proof, see Gurtin

We have to compute $\det(A + hB)$ and take the derivative wrt h . Using

$$\det(A - \lambda I) = -\lambda^3 + I_1(A)\lambda^2 - I_2(A)\lambda + I_3(A)$$

with $\lambda = -1$ we get

$$\det(A + I) = 1 + \operatorname{tr}(A) + o(A)$$

$$\begin{aligned}\det(A + hB) &= \det(A(hA^{-1}B + I)) = \det(A) \det(hA^{-1}B + I) \\ &= (\det(A) + h \det(A) \operatorname{tr}(A^{-1}B) + o(B)) \\ &= (\det(A) + h \det(A) A^{-T} : B + o(B))\end{aligned}$$

Hence

$$D \det(A)[B] = \left. \frac{\det(A + hB)}{dh} \right|_{h=0} = \det(A) A^{-T} : B$$

Exercises (TD)

Let be

- $W(\underline{u}) = W_F(\underline{\underline{F}}(\underline{u}))$ a scalar function (the energy density)

Show that

$$\textcircled{1} \quad \underline{\underline{E}}'(\underline{u})(\underline{v}) = \text{sym}(\underline{\underline{F}}^T \cdot \underline{\underline{\nabla}} \underline{v}), \quad \underline{\underline{C}}'(\underline{u})(\underline{v}) = 2\underline{\underline{E}}'(\underline{u})(\underline{v})$$

$$\textcircled{2} \quad W'(\underline{u})(\underline{v}) = \frac{\partial W}{\partial \underline{\underline{F}}} : \underline{\underline{\nabla}} \underline{v}, \quad W'(\underline{u})(\underline{v}) = \frac{\partial W}{\partial \underline{\underline{E}}} : \underline{\underline{F}}^T \cdot \underline{\underline{\nabla}} \underline{v}, \quad \underbrace{\frac{\partial W}{\partial \underline{\underline{F}}}}_P = \underline{\underline{F}} \cdot \underbrace{\frac{\partial W}{\partial \underline{\underline{E}}}}_S$$

$$\textcircled{3} \quad W''(\underline{u})(\underline{v})(\underline{z}) = \left(\frac{\partial^2 W}{\partial \underline{\underline{E}}^2} : \underline{\underline{F}}^T \cdot \underline{\underline{\nabla}} \underline{z} \right) : (\underline{\underline{F}}^T \cdot \underline{\underline{\nabla}} \underline{v}) + \left(\underline{\underline{\nabla}} \underline{z} \cdot \underbrace{\frac{\partial W}{\partial \underline{\underline{E}}}}_S \right) : \underline{\underline{\nabla}} \underline{v}$$

$$\textcircled{4} \quad J'(\underline{u})(\underline{v}) = J \underline{\underline{F}}^{-T} : \underline{\underline{\nabla}} \underline{v}$$

Variational Formulation

5. Potential energy, variational formulation and numerical solution strategy

Content

- ① Total potential energy and variational formulation of the equilibrium
- ② Linearisation
- ③ Newton algorithm
- ④ Second derivative and stability

Energy minimisation problem

We consider a solid with a reference configuration Ω_0 , submitted to imposed displacements \underline{u}_0 on $\partial_u \Omega_0$, dead volume forces \underline{b}_0 and surface tractions \underline{g}_0 on $\partial_g \Omega_0$, expressed as density per unity of volume or surface in the reference configuration. The **total potential energy** is

$$\mathcal{E}(\underline{u}) = \underbrace{\int_{\Omega_0} W(\underline{I} + \underline{\nabla} \underline{u}) \, dx_0}_{\text{elastic energy}} - \underbrace{\int_{\Omega_0} \underline{b}_0 \cdot \underline{u} \, dx_0 - \int_{\partial_g \Omega_0} \underline{g}_0 \cdot \underline{u} \, ds_0}_{\text{Potential of dead loads}}$$

We define stable equilibria as the solutions of the following local minimization

$$\text{loc min}_{\underline{u} \in \mathcal{U}} \mathcal{E}(\underline{u}), \quad \mathcal{U} \equiv \{ \underline{u} \text{ reg.} : \underline{u} = \underline{u}_0 \text{ on } \partial_u \Omega_0 \}$$

Variational formulation of the equilibrium

A point \underline{u} is a **local minimum** of \mathcal{E} only if the local variation of the energy in any test direction $v \in \mathcal{U}_0 \equiv \{\underline{u} \text{ reg.} : \underline{u} = \underline{0} \text{ on } \partial_u \Omega_0\}$ is not negative, i.e. only if for sufficiently small h

$$0 \leq \mathcal{E}(\underline{u} + h \underline{v}) - \mathcal{E}(\underline{u}) = h \underbrace{\left. \frac{d\mathcal{E}(\underline{u} + h \underline{v})}{dh} \right|_{h=0}}_{\mathcal{E}'(\underline{u})(\underline{v})} + o(|h|)$$

Since for any $v \in \mathcal{U}_0$, $-v \in \mathcal{U}_0$, we obtain the following first order optimality conditions (**stationarity**) of the energy, giving the **variational formulation of the equilibrium conditions**:

Find $\underline{u} \in \mathcal{U} : \quad \mathcal{E}'(\underline{u})(\underline{v}) = 0, \quad \forall \underline{v} \in \mathcal{U}_0 \equiv \{\underline{u} \text{ reg.} : \underline{u} = \underline{0} \text{ on } \partial_u \Omega_0\}$

with

$$\begin{aligned} \mathcal{E}'(\underline{u})(\underline{v}) &= \left. \frac{d\mathcal{E}(\underline{u} + h \underline{v})}{dh} \right|_{h=0} \\ &= \int_{\Omega_0} \underbrace{\frac{\partial W}{\partial \underline{\underline{F}}}}_{\underline{\underline{P}}} : \underline{\underline{\nabla}} \underline{v} \, dx_0 - \int_{\Omega_0} \underline{b}_0 \cdot \underline{v} \, dx_0 - \int_{\partial_g \Omega_0} \underline{g}_0 \cdot \underline{v} \, ds_0 \end{aligned}$$

Exercise: Show that the variational formulation above implies the Lagrangian version of the equilibrium equations.

Linearised problem (Newton algorithm)

Solving the variational equation of the previous slide is a nonlinear problem, that can be solved through successive linearizations using the **Newton algorithm**. Given a starting point $\underline{u}_0 \in \mathcal{U}$, we can expand as follow the equilibrium condition

$$0 = \mathcal{E}'(\underline{u}_0 + h \underline{\tilde{w}})(\underline{v}) = \mathcal{E}'(\underline{u}_0)(\underline{v}) + h \underbrace{\left. \frac{d\mathcal{E}'(\underline{u} + h \underline{\tilde{w}})(\underline{v})}{dh} \right|_{h=0}}_{\mathcal{E}''(\underline{u}_0)(\underline{v})(\underline{\tilde{w}})} + o(|h|)$$

and determine a tentative variation $\underline{w} = h \underline{\tilde{w}} \in \mathcal{U}_0$ by solving the following **linearized problem**

Find $\underline{w} \in \mathcal{U}_0 : \mathcal{E}''(\underline{u}_0)(\underline{v})(\underline{w}) = -\mathcal{E}'(\underline{u}_0)(\underline{v}), \forall \underline{v} \in \mathcal{U}_0$

where we define the **second derivative** of the energy as the following **symmetric bilinear form**:

$$\mathcal{E}''(\underline{u})(\underline{v})(\underline{w}) = \left. \frac{d\mathcal{E}'(\underline{u} + h \underline{w})(\underline{v})}{dh} \right|_{h=0}$$

Newton algorithm

- Give an initial \underline{u}_0 and set $i = 0$
- While **err** > **tol** and $i < i_{\max}$:
 - ① Solve the **linearized problem**

$$\text{Find } \underline{w} \in \mathcal{U}_0 : \mathcal{E}''(\underline{u}_0)(\underline{v})(\underline{w}) = -\mathcal{E}'(\underline{u}_0)(\underline{v}), \forall \underline{v} \in \mathcal{U}_0$$

- ② Update

$$\begin{aligned}\underline{u}_0 &\leftarrow \underline{u}_0 + \underline{w} \\ i &\leftarrow i + 1 \\ \text{err} &\leftarrow \|\text{assemble}(\mathcal{E}'(\underline{u}_0)(\underline{v}))\|\end{aligned}$$

We need to calculate the **first and second derivatives of the energy**.

Derivatives of the strain energy density

- In terms of $\underline{\underline{F}}$ and $\underline{\underline{P}}$, $W(\underline{\underline{F}}(\underline{u}))$

$$W'(\underline{u})(\underline{v}) = \frac{\partial W}{\partial \underline{\underline{F}}} : \underline{\underline{F}}'(\underline{u})(\underline{v}) = \underline{\underline{P}} : \underline{\underline{\nabla}} \underline{v}$$

$$W''(\underline{u})(\underline{v})(\underline{w}) = \left(\frac{\partial \underline{\underline{P}}}{\partial \underline{\underline{F}}} \underline{\underline{\nabla}} \underline{w} \right) \cdot \underline{\underline{\nabla}} \underline{v} = \left(\frac{\partial \underline{\underline{P}}}{\partial \underline{\underline{F}}} \right) : \left(\underline{\underline{\nabla}} \underline{v} \otimes \underline{\underline{\nabla}} \underline{w} \right)$$

- In terms of $\underline{\underline{E}}$ and $\underline{\underline{S}}$, $W(\underline{\underline{E}}(\underline{u}))$

$$W'(\underline{u})(\underline{v}) = \frac{\partial W}{\partial \underline{\underline{E}}} : \underline{\underline{E}}'(\underline{u})(\underline{v}) = \underline{\underline{S}} : \text{sym}(\underline{\underline{F}}^T \underline{\underline{\nabla}} \underline{v}) = \underline{\underline{S}} : (\underline{\underline{F}}^T \underline{\underline{\nabla}} \underline{v})$$

$$W''(\underline{u})(\underline{v})(\underline{w}) = \mathbb{C}_E : (\underline{\underline{F}}^T \underline{\underline{\nabla}} \underline{w} \otimes \underline{\underline{F}}^T \underline{\underline{\nabla}} \underline{v}) + \underline{\underline{S}} : (\underline{\underline{\nabla}} \underline{w}^T \underline{\underline{\nabla}} \underline{v})$$

where we introduce the **elastic tangent stiffness (fourth-order) tensor**

$$\mathbb{C}_E = \frac{\partial^2 W}{\partial \underline{\underline{E}}^2} = \frac{\partial \underline{\underline{S}}}{\partial \underline{\underline{E}}}$$

Second derivative of the energy functional

Using the result of the previous slide we can write the first and second derivative of the strain energy

$$\begin{aligned}\mathcal{E}'(\underline{u})(\underline{v}) &= \int_{\Omega_0} \underline{\underline{S}} : (\underline{\underline{F}}^T \cdot \underline{\underline{\nabla}} \underline{v}) \, dx_0 - \int_{\Omega_0} \underline{b}_0 \cdot \underline{v} \, dx_0 - \int_{\partial_g \Omega_0} \underline{g}_0 \cdot \underline{v} \, ds_0 \\ \mathcal{E}''(\underline{u})(\underline{v})(\underline{w}) &= \underbrace{\int_{\Omega_0} \mathbb{C}_E : (\underline{\underline{F}}^T \underline{\underline{\nabla}} \underline{w} \otimes \underline{\underline{F}}^T \underline{\underline{\nabla}} \underline{v}) \, dx_0}_{\text{elastic stiffness}} + \underbrace{\int_{\Omega_0} \underline{\underline{S}} : (\underline{\underline{\nabla}} \underline{w}^T \cdot \underline{\underline{\nabla}} \underline{v}) \, dx_0}_{\text{geometric stiffness}}\end{aligned}$$

where $\underline{\underline{S}}$, $\underline{\underline{F}}$, and \mathbb{C}_E depend on \underline{u} .

The UFL components of FEniCS allows us to define the directional derivatives using symbolic automatic differentiation. This is the syntax:

```
u, v, w = Function(V), TestFunction(V), TrialFunction(V)
energy = function_that_you_have_to_write(u)
denergy_v = derivative(energy, u, v)
ddenergy_v_w = derivative(denergy_v, u, w)
```

Exemples: Kirchhoff-Saint Venant

$$\begin{aligned}W_E(\underline{\underline{E}}) &= \frac{\lambda}{2}(\text{tr}(\underline{\underline{E}}))^2 + \mu \underline{\underline{E}} : \underline{\underline{E}} \\ \underline{\underline{S}} &= \frac{\partial W_E}{\partial \underline{\underline{E}}} = \lambda \text{tr}(\underline{\underline{E}})I + 2\mu \underline{\underline{E}} \\ \mathbb{C}_E[E] &= \lambda \text{tr}(E)I + 2\mu E\end{aligned}$$

Exemples: Neo-Hooke compressible

$$W_C(C) = \frac{\mu}{2}(\text{tr}(C) - 3) - 2\mu \ln J + \frac{\lambda}{2} \ln J^2$$

$$W_E(E) = \mu \text{tr}(E) - 2\mu \ln J + \frac{\lambda}{2} \ln J^2$$

$$W_F(F) = \frac{\mu}{2}(\text{tr}(F^T F) - 3) - 2\mu \ln J + \frac{\lambda}{2} \ln J^2$$

$$\underline{\underline{S}} = \mu \underline{\underline{1}} - \mu \underline{\underline{C}}^{-1} + \lambda \ln J \underline{\underline{C}}^{-1}$$

$$\mathbb{C}_E = (2(\mu - \lambda \ln J) + \lambda) \underline{\underline{C}}^{-1} \otimes \underline{\underline{C}}^{-1}$$

Relations utiles:


$$\frac{\partial J}{\partial F} = J F^{-T}, \quad \frac{\partial J}{\partial C} = \frac{1}{2} J C^{-1}, \quad \frac{\partial J}{\partial E} = J C^{-1}, \quad \text{DC}^{-1}[E] = -C^{-1} \text{DC}[E] C^{-1}$$

$$\frac{\partial^2 J}{\partial F^2} \hat{F} = \frac{\partial J}{\partial F} \hat{F} F^{-T} - J F^{-T} \hat{F}^T F^{-T},$$


Recent research on instability in hyperelastic solids

Examples of elastic instabilities due to growth

Typical phenomena:

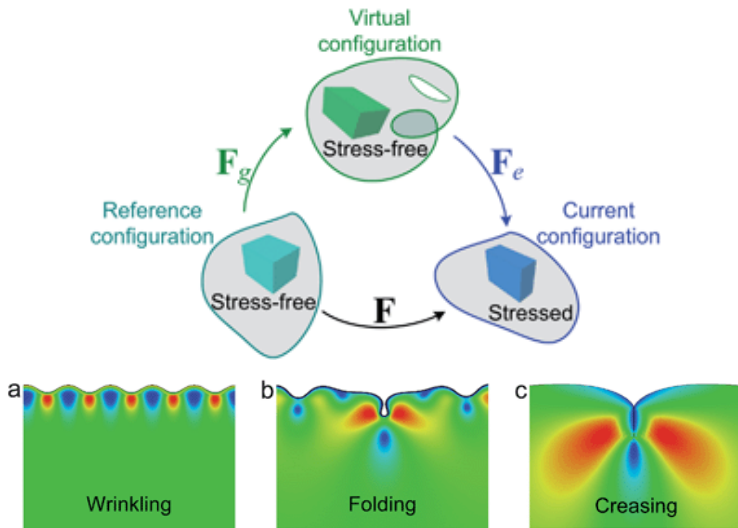

Composition of two transformations

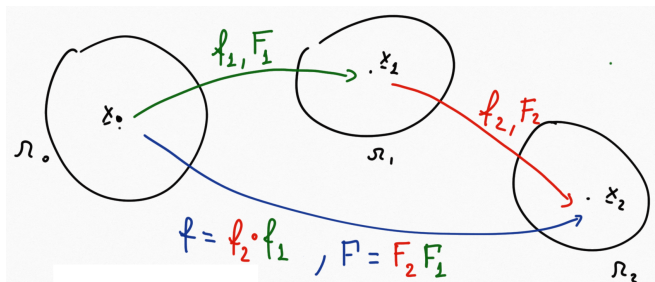

- First transformation \underline{f}_1 : $\underline{x}_1 = \underline{f}_1(\underline{x}_0)$, $\underline{F}_1 = \frac{\partial \underline{x}_1}{\partial \underline{x}_0}$
- Second transformation \underline{f}_2 : $\underline{x}_2 = \underline{f}_2(\underline{x}_1)$, $\underline{F}_2 = \frac{\partial \underline{x}_2}{\partial \underline{x}_1}$
- Composition of the two transformations $\underline{f} = \underline{f}_2 \circ \underline{f}_1$:

$$\underline{x}_2 = \underline{f}(\underline{x}_0) = \underline{f}_2(\underline{f}_1(\underline{x}_0)), \quad \underline{F} = \frac{\partial \underline{x}_2}{\partial \underline{x}_0} = \frac{\partial \underline{x}_2}{\partial \underline{x}_1} \cdot \frac{\partial \underline{x}_1}{\partial \underline{x}_0} = \underline{F}_2 \cdot \underline{F}_1$$

Examples of elastic instabilities due to growth

B. Li, H. P. Zhao and X. Q. Feng, J. Mech. Phys. Solids, 2011, 59, 610–624





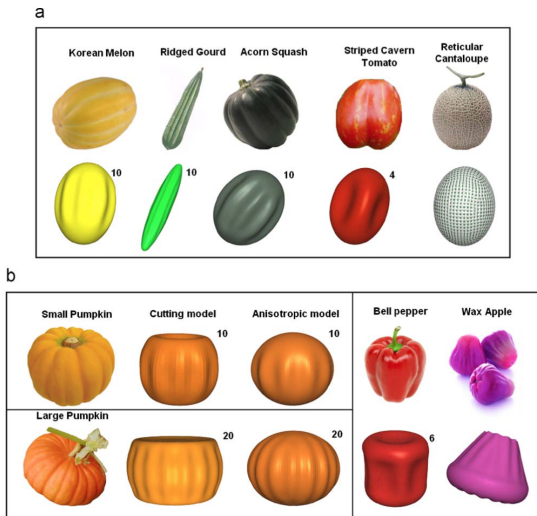




Fig. 9. (a) Implications for fruit morphogenesis: the morphologies of several fruits and vegetables are compared with the simulated buckles shapes of model spheroids. The effective geometry/material parameters used for simulation are: Korean melon ($R/t = 15$, $k = 1.3$, $E_f/E_s = 30$), ridged (silk) gourd ($R/t = 4$, $k = 5$, $E_f/E_s = 30$), acorn squash ($R/t = 17$, $k = 1.2$, $E_f/E_s = 30$), striped cavern tomato ($R/t = 5$, $k = 1.3$, $E_f/E_s = 100$), bell pepper ($R/t = 8$, $k = 1.3$, $E_f/E_s = 100$), reticular cantaloupe ($R/t = 75$, $k = 1.3$, $E_f/E_s = 5$). (b) Implications for fruit morphogenesis with derivational or anisotropic spheroids. Small pumpkin simulated by cutting geometrical model ($a/t = 20$, $k' = 0.8$, $E_f/E_s = 30$) and by anisotropic growth model ($R/t = 25$, $k = 0.8$, $E_f/E_s = 30$, grow along hoop direction). Large pumpkin simulated by cutting model ($a/t = 50$, $k' = 0.6$, $E_f/E_s = 30$) and by anisotropic growth model ($R/t = 65$, $k = 0.8$, $E_f/E_s = 30$, grow along hoop direction). Wax apple is approximated as a cone with $E_f/E_s = 20$, cone angle of 30° , and $q/t = 30$.

Examples of elastic instabilities due to growth

T. Savin, N. A. Kurpios, A. E. Shyer, P. Florescu, H. Liang, L. Mahadevan and C. J. Tabin, *Nature*, 2011, 476, 57–62

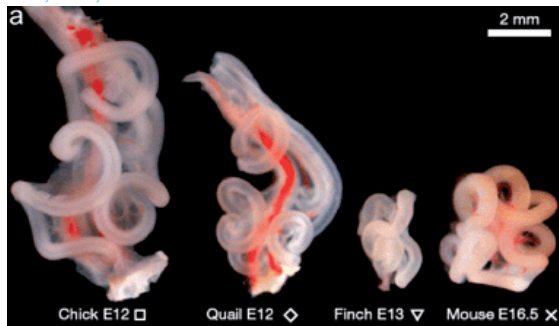


Examples of elastic instabilities due to growth

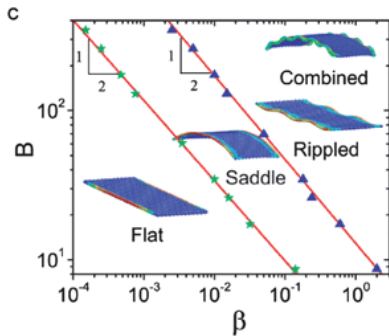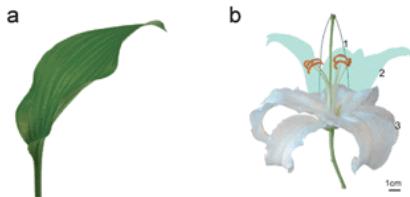

H. Liang and L. Mahadevan, Proc. Natl. Acad. Sci. U. S. A., 2009, 106, 22049–22054






Examples of elastic instabilities due to growth

S. Hill and C. A. Walsh, *Nature*, 2005, 437, 64–67

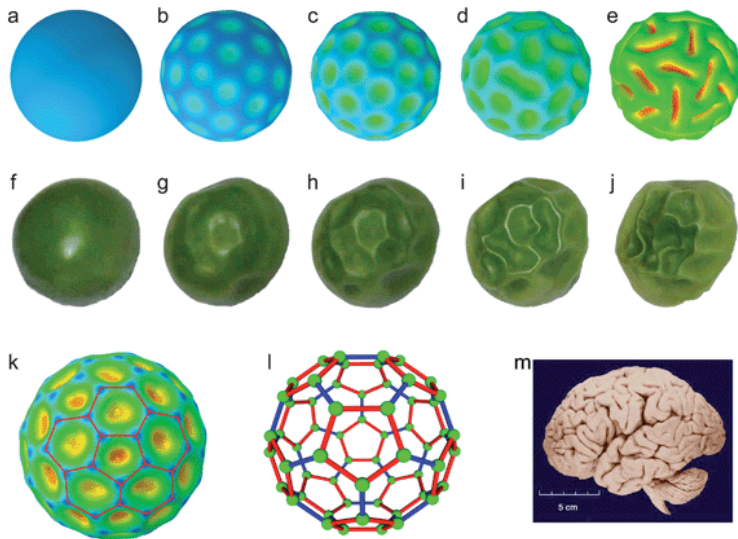

Examples of elastic instabilities due to growth

B. Li, Y. P. Cao, X. Q. Feng and H. Gao, J. Mech. Phys. Solids, 2011, 59, 758–774



Examples of elastic instabilities due to growth

Review papers

- B.Li, Y.P.Cao, X.-Q.Feng, H.Gao, Mechanics of morphological instabilities and surface wrinkling in soft materials: a review, Soft Matter, 2012, 8, 5728-5745, DOI: 10.1039/C2SM00011C
- Z.Liu, S.Swaddiwudhipong, W.Hong, Pattern formation in plants via instability theory of hydrogels, Soft Matter, 2013, 9, 577-587, 10.1039/C2SM26642C (Paper)

Examples of elastic instabilities: Localization

Necking of soft hyper-elastic cylinders

$$\bar{\Gamma} = \frac{\Gamma}{\rho G}$$

radius Γ surface tension G shear modulus

$$\bar{\Gamma} = 8.0$$



2 mm

$$\bar{\Gamma} = 10.6$$





Experimental pictures: Serge Mora

$$\mathcal{E} = \Gamma A + \int W(\underline{\underline{F}}) dV$$

Examples of elastic instabilities: Localization

Necking of soft hyper-elastic cylinders

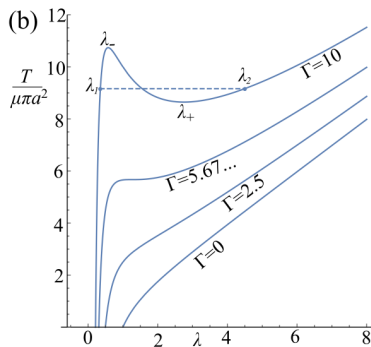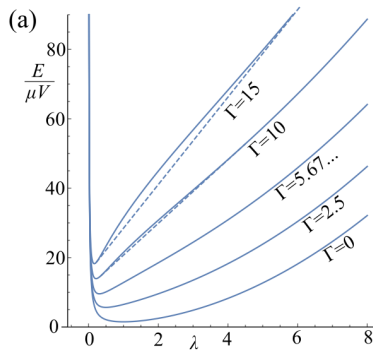


$$\mathcal{E} = \Gamma A + \int W(\underline{\underline{F}}) dV$$

Xuan & Biggins (2017)

Examples of elastic instabilities: Localization

Necking of soft hyper-elastic cylinders

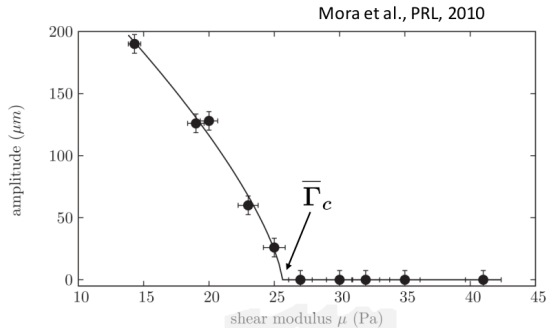

$$\bar{\Gamma} = \frac{\Gamma}{\rho G}$$

References

- D.Bigoni, Nonlinear Solid Mechanics Bifurcation Theory and Material Instability. Cambridge University Press, 2012, ISBN:9781107025417
 - Chapter 3: 3.1, 3.2, 3.3 till Eq.(3.36), 3.3, 3.4, 3.5, 3.6 till Eq.(3.135)
 - Chapter 4: 4.1, 4.2.1, 4.2.2
 - Chapter 5: At least one of the proposed examples
- Class notes from Kerstin Weinberg available here:
 - Tensor calculus:
<http://mech2.pi.tu-berlin.de/weinberg/Lehre/fem2/Appendix.pdf>
 - Kinematics:
<http://mech2.pi.tu-berlin.de/weinberg/Lehre/fem2/Chapter2.pdf>
 - Statics:
<http://mech2.pi.tu-berlin.de/weinberg/Lehre/fem2/Chapter3.pdf>
 - Constitutive laws:
<http://mech2.pi.tu-berlin.de/weinberg/Lehre/fem2/Chapter4.pdf>
- Alternative references:
 - P. Chadwick, Continuum Mechanics: Concise Theory and Problems, Dover 1998
 - M.E. Gurtin, An Introduction to Continuum Mechanics. Academic Press, New York (1981).
 - P.Wriggers Nonlinear finite element methods: available from SU: <https://link.springer.com/content/pdf/10.1007%2F978-3-540-71001-1.pdf>