
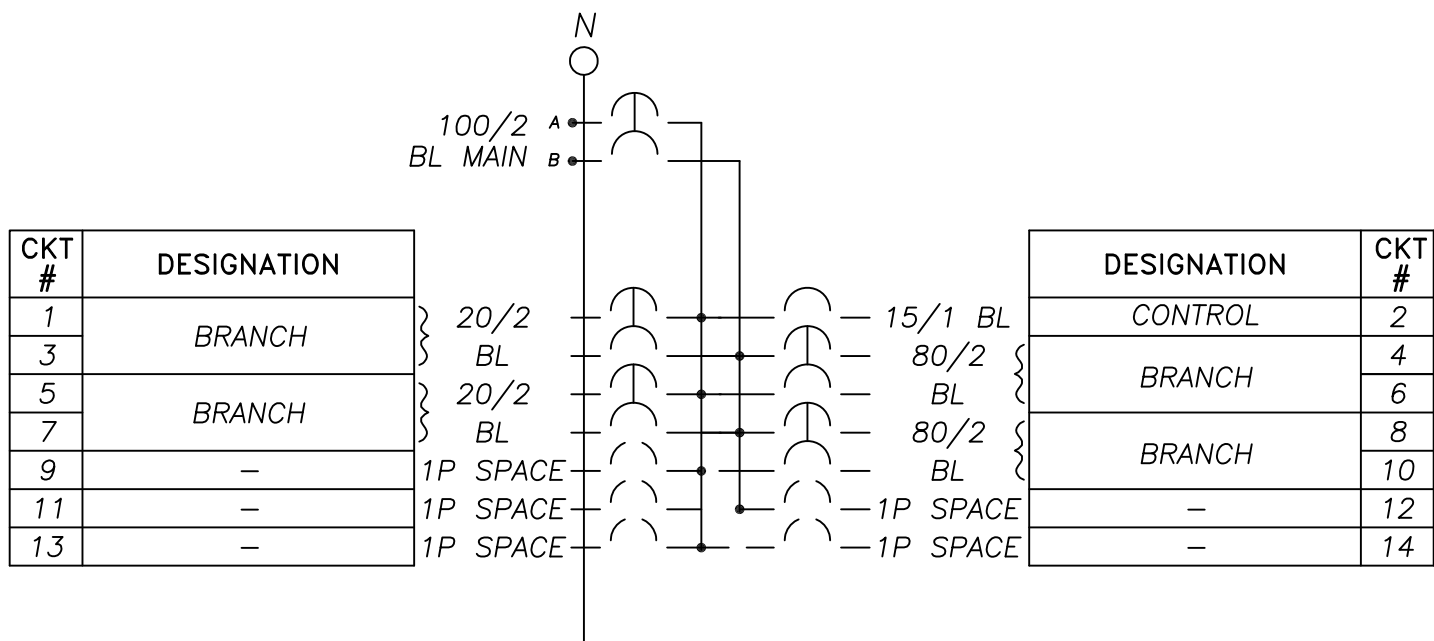


NOTES:

1. UL LISTED ENCLOSED INDUSTRIAL CONTROL PANEL, SUITABLE FOR USE AS SERVICE EQUIPMENT.
2. SHORT CIRCUIT RATING: 10,000 MAX. @ 240 VAC.
3. CONSTRUCTION: TYPE 3R.
4. TYPE III, BOTTOM FEED – BOTTOM LOAD.
5. FINISH: PAINT ANSI 61 LIGHT GRAY

COOPER B-Line			
COMMERCIAL METER PEDESTAL CMP4121MC 78205163477 FT WAINRIGHT PARKING			
ELEVATION DRAWING			REV: -
DRAWN BY: JBAILLIO	DATE: 6/2/10	SIZE: C	ECO: -
<small>THIS DRAWING AND/OR TECHNICAL INFORMATION CONTAINED HEREON IS THE PROPERTY OF COOPER B-LINE, INC. ("B-LINE"). IT IS ISSUED IN CONFIDENCE FOR B-LINE ENGINEERING PURPOSES ONLY AND MAY NOT BE REPRODUCED OR USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE EXPRESS WRITTEN PERMISSION OF B-LINE TO THE USER. THIS DRAWING AND/OR TECHNICAL INFORMATION IS THE PROPERTY OF B-LINE AND IS LOANED FOR MUTUAL ASSISTANCE. TO BE RETURNED WHEN ITS INTENDED PURPOSE HAS BEEN SERVED.</small>			




PANEL DESIGNATION: **LOAD CENTER**

RATINGS: 200 AMP, 120/240 VAC
 1-PHASE/3-WIRE
 14 BRANCH CIRCUITS
 CU BUS

MAIN BREAKER: SIEMENS TYPE "BL" BOLT-ON
 100/2P
 240 VAC
 10,000 AIC

BRANCH BREAKER(S): SIEMENS TYPE "BL" BOLT-ON

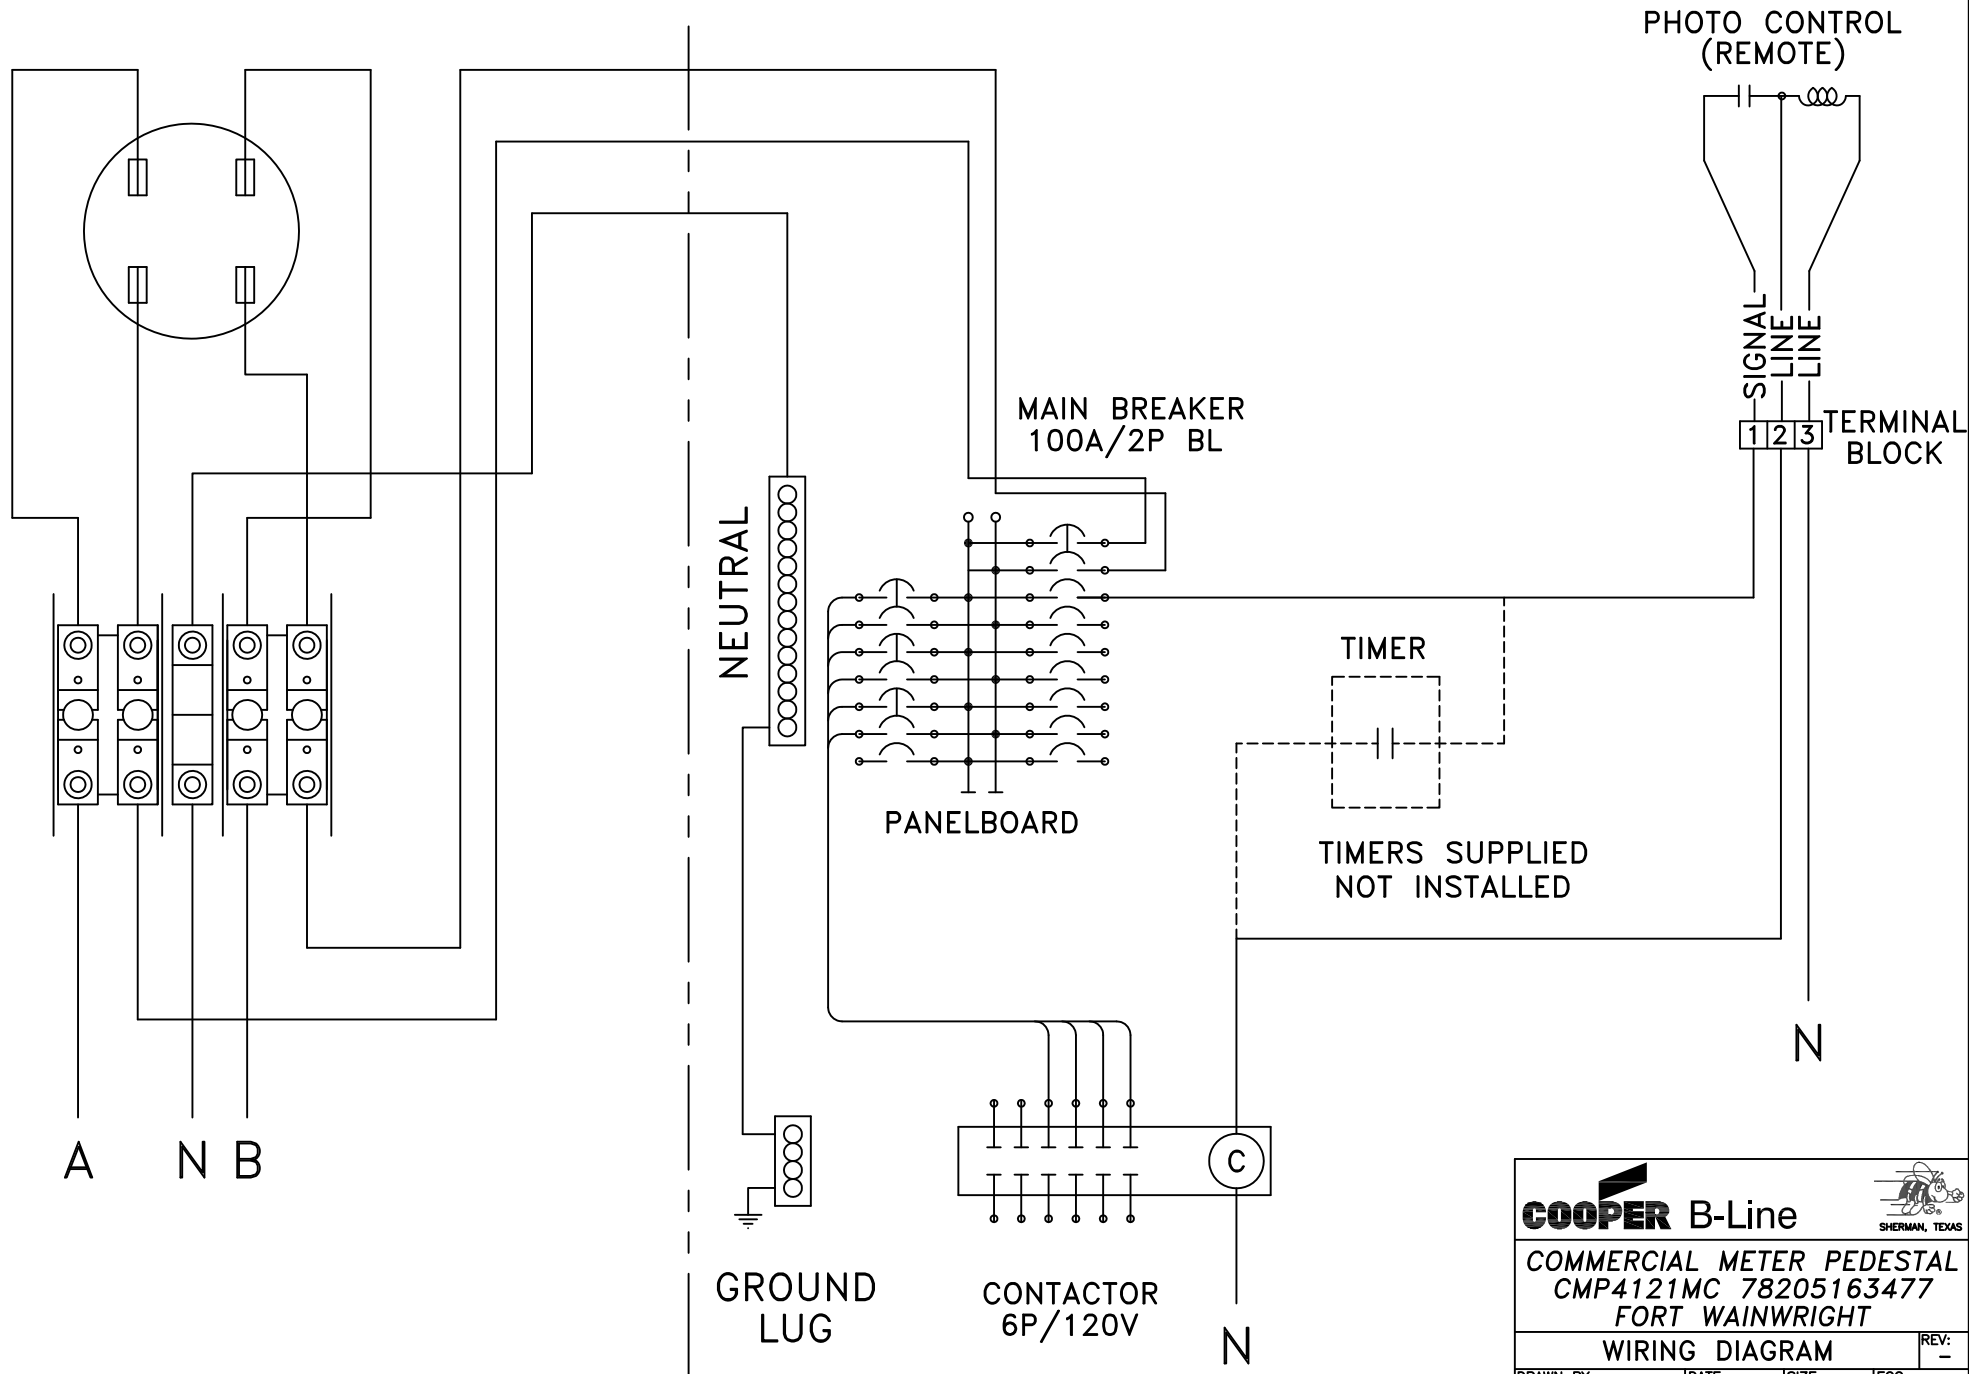

COOPER B-Line

COMMERCIAL METER PEDESTAL
CMP4121MC 78205163477
FORT WAINWRIGHT

WIRING DIAGRAM

DRAWN BY: JBAILLIO	DATE: 6/2/10	SIZE: C	ECO: -
-----------------------	-----------------	------------	-----------

THIS DRAWING AND/OR TECHNICAL INFORMATION CONTAINED HEREON IS THE PROPERTY OF COOPER B-LINE, INC. ("B-LINE"), IS ISSUED IN CONFIDENCE FOR B-LINE ENGINEERING PURPOSES ONLY AND MAY NOT BE REPRODUCED OR USED FOR ANY PURPOSE WHATSOEVER WITHOUT THE EXPRESS WRITTEN PERMISSION OF B-LINE TO THE USER. THIS DRAWING AND/OR TECHNICAL INFORMATION IS THE PROPERTY OF B-LINE AND IS LOANED FOR MUTUAL ASSISTANCE, TO BE RETURNED WHEN ITS INTENDED PURPOSE HAS BEEN SERVED.