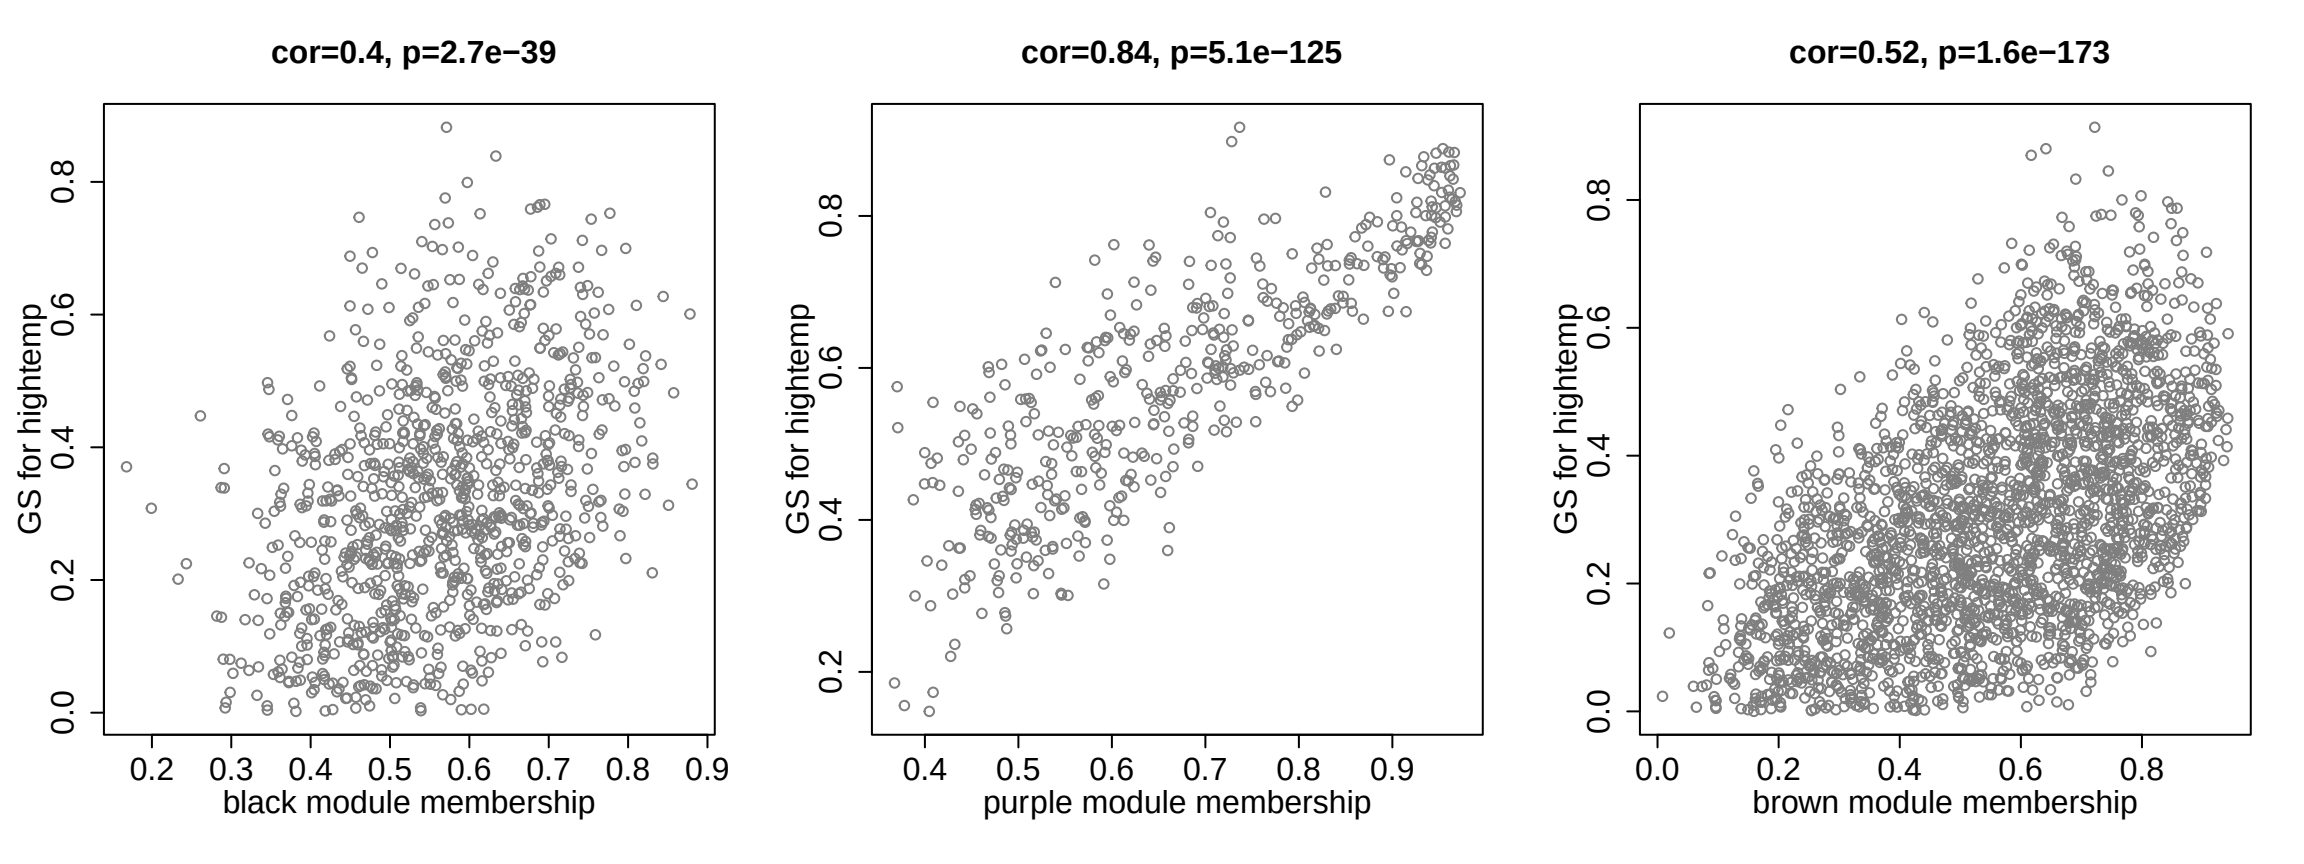

cor=0.4, p=2.7e−39
GS for hightemp
black module membership
cor=0.84, p=5.1e−125
GS for hightemp
purple module membership
cor=0.52, p=1.6e−173
GS for hightemp
brown module membership