



ATIS Arrival	132.50
ARR	131.10
APP	120.50
TWR	134.60

RNP Z RWY 30



BG050 at 3 000 requires a **5.6%** minimum climb gradient due to airspace restrictions, if unable inform **ATC**.

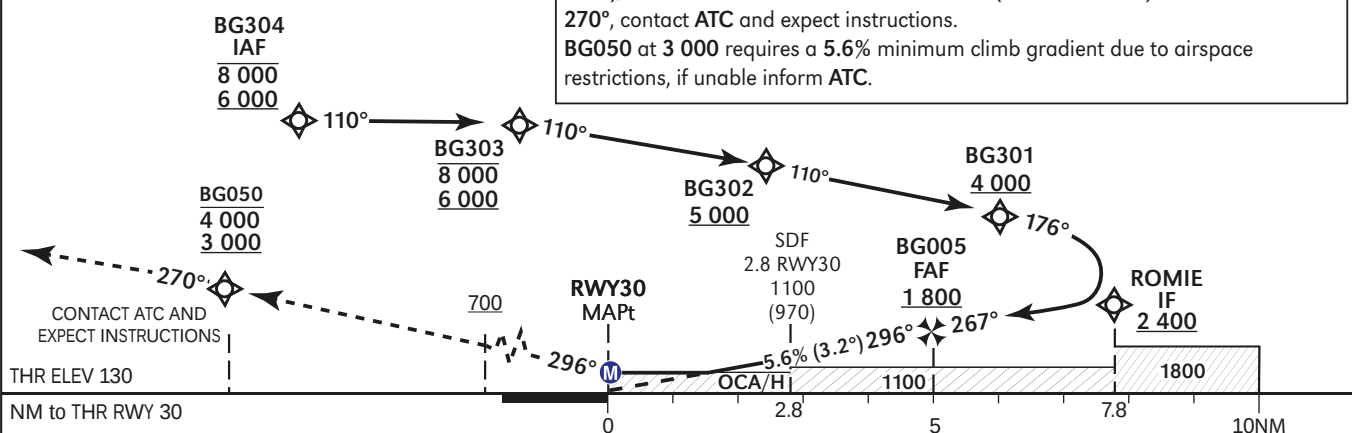

OCA (OCH)	A		B		C		D	
LNAV	680 (550)							
CIRCLING	N/A							
RWY30	2		3		4		5	
ALT (HGT)	860 (730)		1 200 (1 070)		1 540 (1 410)		1 880 (1 750)	
GS	kt	80	100	120	140	160	180	
ROD: 5.6%	ft/min	453	567	680	792	905	1 020	

CAA

AMENDMENT 1/25

CHANGES: OCA Updated.

Procedure: RNP Z RWY 30

Navigation Specification	Path Descriptor (Recommended)	Waypoint Identifier	Latitude Longitude	Flyover	Course/ Track M° (T°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (Kts)	Remarks
RNAV 1	IF	BG304	32° 09' 24"N 034° 45' 58" E	-				-8 000 +6 000		IAF
RNAV 1	TF	BG303	32° 07' 17.7"N 034° 51' 18" E	-	110 (114.8)	5.0		-8 000 +6 000		
RNAV 1	TF	BG302	32° 05' 09.5"N 034° 56' 42" E	-	110 (114.8)	5.1		+5 000		
RNAV 1	TF	BG301	32° 03' 00.9"N 035° 02' 06" E	-	110 (114.8)	5.1		+4 000		
RNAV 1	TF	ROMIE	31° 57' 18.5"N 035° 02' 00.7" E	-	176 (180.8)	5.7	R	+2 400	-185	IF
RNP APCH	TF	BG005	31° 57' 23.3"N 34° 58' 40.2" E	-	267 (271.6)	2.8	R	+1 800		FAF
RNP APCH	TF	RWY30	31° 59' 59.88"N 034° 53' 39.12" E	Y	296 (301.4)	5.0	R	+180		MAPt

Standard missed approach

Navigation Specification	Path Descriptor (Recommended)	Waypoint Identifier	Latitude Longitude	Flyover	Course/ Track M° (T°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (Kts)	Remarks
RNAV 1	CA	-		-	296 (301.4)			+700	-185	
RNAV 1	DF	BG050	32° 00' 55.9" N 034° 44' 05.9" E	-			L	-4 000 +3 000	-220	
RNAV 1	FM			-	270 (275.4)		R	+3 000		

Non Precision Final Approach – Slope (Descent angle)	5.6% (3.2°)
--	----------------