

A Robust Numerical Algorithm for simulating the interaction of multiphase and multimaterial fluid(s) with flexible solid(s) *

Estebe, Cody

Dept. of math, FL State Univ.

Kumar Pal, Ashwani

Dept. of Mech. Engr., FL State Univ.

Liu, Yang

Dept. of Mech. Engr., FL State Univ.

Moradikazerouni, Alireza

Dept. of Mech. Engr., FL State Univ.

Arienti, Marco

Sandia Labs

Lian, Yongsheng

Department of Mech. Engr., Univ. Louisville

Ohta, Mitsuhiro

Dept. of Mech. Sci, Tokushima University

Shoele, Kourosh

Dept. of Mech. Engr., FL State Univ.

Sussman, Mark

Dept. of math, FL State Univ.

September 3, 2026

ABSTRACT: A new Eulerian method is presented for simulating complex three dimensional and three dimensional axisymmetric flows consisting of any number of materials, to include compressible fluids, incompressible fluids, ice, melt, vapor, and solids undergoing plastic deformation. The interfaces between materials are modeled and discretized as sharp. The new method is robust with respect to a wide range of material properties, and large interface deformation. The new method is scalable on MIMD (Multi Instruction Distributed memory using MPI) and MISD (Multi Instruction Shared memory using OpenMP)

*this material is based upon work supported by National Aeronautics and Space Administration under grant number 80NSSC20K0352

computer systems. The new method is also scalable with respect to dynamic adaptive mesh refinement.

1 Introduction

The ability to simulate multiphase and multimaterial high and low speed flows, to include the interaction of fluid(s) and elastic material(s), has a number of applications: bubble growth and collapse interacting with flexible surfaces[53, 54, 48], wetting dynamics of liquid droplets on deformable membranes[31], design of breathable masks[13], underwater explosions near structures[27, 56, 9, 16, 19, 49, 37], hydroelastic applications[30], vibration of pipes due to internal boiling flow[2], ultrasonic leak detection in nuclear power plants[11], and the measurement of the tensile strength properties of colliding and deforming structures[12].

We are not aware of previously reported research on the robust numerical simulation of the interaction of multiphase flows with elastic materials, to include incompressible materials, weakly compressible materials, and/or strongly compressible materials. The research that we report here is a continuation of research that started with the following article by Jemison et al[21]. In Jemison et al's research, a novel adaptive, parallel, asymptotically preserving[24, 6, 7, 38], moment-of-fluid method was presented for simulating two phase flows to include incompressible, low speed, and high speed flows. The method in Jemison et al was a colocated generalization of the projection method for incompressible flows[20] in order to simulate both compressible (with shock waves) and incompressible flows.

In the present work, we have improved upon [21] in the following important ways:

1. the present method is now a staggered grid method instead of colocated. See Figures 1, 2, and 3. The following research for incompressible flows underscore the importance of a staggered grid[26, 42, 40, 18] for projection methods. We also report recent work by Park and Son[34] in which they developed a staggered grid method for compressible flows in which the acoustic time step constraint was avoided.
2. the present method represents complex deforming interfaces using the Continuous Moment-of-Fluid method[55] (CMOF), instead of the Moment-of-Fluid (MOF) method[22]. The CMOF method[55] removes a "checkerboard instability" that appears for surface tension driven flows.
3. We have developed a conservative, staggered grid, algorithm for solving the equations associated with standard elastic materials and materials undergoing plastic deformation. Our new algorithm is an improvement on the algorithms reported in [42, 40, 34] so that we can simulate both low and high speed fluid structure interaction problems. Our new method can simulate incompressible elastic materials or compressible elastic materials with shock waves.

4. We have developed an exactly mass and volume preserving algorithm so that mass and volume of fluid and elastic materials do not change due to contact line dynamics (e.g. splashing or sliding), or flotsam removal.

In Table 1, we compare and contrast our new method with the current state of the art.

1.1 Motivation for enhancing our asymptotically preserving algorithm from collocated grid to staggered grid

In this section, we just focus on single material inviscid compressible gas dynamics with a general equation of state and periodic boundary conditions. The derivations here are applicable to the general multimaterial case. The compressible gas dynamic equations[1, 7, 38, 10] are:

$$\rho_t + \nabla \cdot (\rho \vec{u}) = 0 \quad (1)$$

$$(\rho \vec{u})_t + \nabla \cdot (\rho \vec{u} \otimes \vec{u} + p \mathbb{I}) = 0 \quad (2)$$

$$(\rho E)_t + \nabla \cdot (\rho \vec{u} E + p \vec{u}) = 0 \quad (3)$$

$$E = e + \frac{1}{2} \vec{u} \cdot \vec{u} \quad (4)$$

$$p = p(\rho, e) \quad c^2 = p_\rho + \frac{p_e p}{\rho^2} \quad e = c_v T \quad (5)$$

Following the “asymptotically preserving” analysis in these articles, [1, 7, 38, 10], it can be shown that our Directionally split Cell Integrated Semi-Lagrangian (CISL) algorithm given by Algorithm 1 approaches a discretization consistent with the incompressible flow equations in the zero Mach number limit.

The advection commands in Algorithm1 are discretized using the directionally split cell integrated semi-Lagrangian advection algorithm with piecewise constant reconstruction[21, 39] (see Figures 1, 2, and 3). The relation between the variables’ control volumes and the computational mesh are shown in Figures 1, 2, and 3). The piecewise constant representation guarantees that no new extrema are generated for $\vec{u}^*$ and E^* , the updated density ρ^{n+1} is positive, and the discrete mass, momentum, and energy are conserved.

For incompressible flows, it has already been shown that the staggered grid discretization [26] of steps 9 and 10 in algorithm 1 results in a provably stable and convergent method.

For the compressible case, if we consider a simplified problem, in which the staggered grid discretization of steps 9 and 10 in algorithm 1 is applied to the wave equation:

$$\rho \vec{u}_t = -\nabla p \quad \rho = \rho(\vec{x}) \quad \rho \text{ is positive} \quad (6)$$

Author(s)	incompressible fluids	compressible fluids	multiphase flow	multimaterial flow	shock waves	Coupling Method	Interface Representation	Complex topology
Wardlaw and Luton [49]	No	Yes	No	Yes	Yes	partitioned	ALE (fluid interfaces) Lagrangian (structure)	Yes
Tran and Udaykumar [43]	No	Yes	No	Yes	Yes	Explicit	Particle Level Set	Yes
Robinson-Mosher et al. [36]	Yes	No	No	No	No	Monolithic	Connected Markers	No
Gretarsson et al. [17]	No	Yes	No	No	Yes	Monolithic	one dimension	No
Sugiyama et al. [42]	Yes	No	No	No	No	pressure and velocity	Volume of fluid	yes
Banks et al. [4]	Yes	No	No	No	No	Partitioned	Body fitted	No
Patkar et al. [35]	No	Yes	No	No	Yes	Monolithic	Connected Markers	No
Banks et al. [5]	Yes	No	No	No	No	Partitioned	Body fitted	No
Shin et al. [40]	Yes	No	Yes	Yes	No	pressure and velocity	level contour reconstruction	Yes
Mokbel et al. [31]	Yes	No	No	Yes	No	Monolithic	Hybrid Diffuse and ALE	No
Kloppe and Aland [23]	Yes	No	No	Yes	No	Monolithic	Hybrid Diffuse and ALE	No
Gao et al. [15]	No	Yes	No	Yes	Yes	explicit moving mesh ALE	moving mesh ALE	Yes
Ferrari et al. [14]	No	Yes	Yes	Yes	Yes	explicit non-partitioned	Diffuse interface	Yes
Wilfong et al. [51]	No	Yes	Yes	Yes	Yes	explicit non-partitioned	Diffuse interface	Yes
Park and Son [34]	Yes	Yes	Yes	Yes	No	pressure and velocity	Coupled level set volume of fluid	Yes
Present Article, Estebe et al	Yes	Yes	Yes	Yes	Yes	pressure and velocity	Continuous Moment of Fluid	Yes

Table 1: Recent numerical methods with fluid interaction with deformable structures. Legend: ALE (Arbitrary Lagrangian Eulerian), “pressure and velocity coupling” refers to the asymptotically preserving methods which reduce to the projection method in the zero Mach number limit[34, 42, 40], “Partitioned coupling” refers to alternating solving the fluid equations with elastic material boundary conditions and then solving the elastic material equations with fluid boundary conditions.

Algorithm 1 Asymptotically Preserving time discretization for gas dynamics

```

1:  $k \leftarrow 0$ 
2:  $\vec{u}^{n+1,(k)} \leftarrow \vec{u}^n$ 
3: while  $k \leq 1$  do
4:    $\rho^{n+1,(k+1)} \leftarrow \rho^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho \vec{u}^{n+1,(k)}) dt$ 
5:    $\rho^{n+1,(k+1)} \vec{u}^{*,(k+1)} \leftarrow (\rho \vec{u})^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho \vec{u} \otimes \vec{u}^{n+1,(k)}) dt$ 
6:    $\rho^{n+1,(k+1)} E^{*,(k+1)} \leftarrow (\rho E)^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho E \vec{u}^{n+1,(k)}) dt$ 
7:    $p^{*,(k+1)} \leftarrow p(\rho^{n+1,(k+1)}, e^{*,(k+1)})$ 
8:    $c^{*,(k+1)} \leftarrow c(\rho^{n+1,(k+1)}, e^{*,(k+1)})$ 
9:    $\begin{pmatrix} \vec{u}^{n+1,(k+1)} \\ p^{n+1,(k+1)} \end{pmatrix} \leftarrow \begin{pmatrix} \vec{u}^{*,(k+1)} - \Delta t \frac{\nabla p^{n+1,(k+1)}}{\rho^{n+1,(k+1)}} \\ p^{*,(k+1)} - \Delta t \rho^{n+1,(k+1)} (c^{*,(k+1)})^2 \nabla \cdot \vec{u}^{n+1,(k+1)} \end{pmatrix}$ 
10:   $E^{n+1,(k+1)} \leftarrow E^{*,(k+1)} - \Delta t \frac{\nabla \cdot (\vec{u} p)^{n+1,(k+1)}}{\rho^{n+1,(k+1)}}$ 
11:   $k \leftarrow k + 1$ 
12: end while

```

$$\frac{1}{\rho c^2} p_t = -\nabla \cdot \vec{u} \quad c = c(\vec{x}) \text{ } c \text{ is positive} \quad (7)$$

75 then the staggered grid approach guarantees unconditional stability for any fixed

$$\frac{\Delta t}{\Delta x} \quad (8)$$

1.2 Lax diffusion for Energy and Momentum equations in elastic materials

In this section, we just focus on single material compressible elastic fluid dynamics with a general equation of state and periodic boundary conditions. The derivations here are applicable to the general multimaterial case.

80 The compressible elastic fluid dynamic equations[43, 29, 8] are:

$$\rho_t + \nabla \cdot (\rho \vec{u}) = 0 \quad (9)$$

$$(\rho \vec{u})_t + \nabla \cdot (\rho \vec{u} \otimes \vec{u} + p \mathbb{I} - s) = 0 \quad (10)$$

$$(\rho E)_t + \nabla \cdot (\rho \vec{u} E + p \vec{u} - \vec{u} \cdot s) = 0 \quad (11)$$

$$E = e + \frac{1}{2} \vec{u} \cdot \vec{u} \quad (12)$$

85

$$(\rho s)_t + \nabla \cdot (\rho \vec{u} s) = \rho(\Omega s - s \Omega + 2G(\bar{D} - D^p)) \quad (13)$$

$$D = \frac{\nabla \vec{u} + (\nabla \vec{u})^T}{2} \quad (14)$$

$$\Omega_{ij} = \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} - \frac{\partial u_j}{\partial x_i} \right) \quad (15)$$

$$p = p(\rho, e) \quad c^2 = p_\rho + \frac{p_e p}{\rho^2} \quad e = c_v T \quad (16)$$

D^p is the plastic strain rate and is defined below (40).

90 The elastic tensor s is discretized on a staggered grid as illustrated in Figures 1, 2, and 3, and as recommended by [42, 40, 34].

We discretize the elastic term, $\nabla \cdot s$ in (10), and the $\nabla \cdot (\vec{u}p)$ term in (11) using central differencing for which we have found to cause problems in elastic materials for realistic values of the shear modulus G . In order to overcome this
95 difficulty, we add Lax Friedrichs Diffusion[25] to both the momentum equation (10),

$$\nabla \cdot (2\mu_{\text{Lax}} D), \quad (17)$$

$$\mu_{\text{Lax}} = \frac{\rho_{\text{max}} \Delta x^2}{2\text{DIM} \Delta t} \quad D = \frac{\nabla \vec{u} + (\nabla \vec{u})^T}{2} \quad \text{DIM} = 2 \text{ or } 3, \quad (18)$$

and the energy equation (11),

$$\nabla \cdot (k_{\text{Lax}} \nabla T), \quad (19)$$

$$k_{\text{Lax}} = \frac{\rho_{\text{max}} c_v \Delta x^2}{2\text{DIM} \Delta t}. \quad (20)$$

100 So, an outline of our asymptotically preserving temporal discretization of non-isothermal gas dynamics, including Lax-Friedrichs smoothing, is given by Algorithm 2.

Remarks:

1. In [25], the artificial diffusion term(s) are discretized explicitly in time, but
105 in our implementation, diffusion is discretized in time semi-implicitly; see steps 9 and 10 in Algorithm 2.
2. In [25], it is proved for general scalar hyperbolic problems that the Lax method converges if the CFL condition is met. For systems of hyperbolic conservation laws, Lax conjectures that the method converges, but does not offer a proof. We have a similar conjecture, that Lax artificial diffusion guarantees convergence; our conjecture is stronger. We conjecture
110 that adding Lax artificial diffusion to our method guarantees convergence so long as the “velocity” CFL condition and “shear modulus” CFL conditions are met (??), but sound speed restrictions on the time step are unnecessary.
115

Algorithm 2 Asymptotically Preserving time discretization for an elastic material

```

1:  $k \leftarrow 0$ 
2:  $\vec{u}^{n+1,(k)} \leftarrow \vec{u}^n$ 
3: while  $k \leq 1$  do
4:    $\rho^{n+1,(k+1)} \leftarrow \rho^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho \vec{u}^{n+1,(k)}) dt$ 
5:    $\rho^{n+1,(k+1)} \vec{u}^{*,(k+1)} \leftarrow (\rho \vec{u})^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho \vec{u} \otimes \vec{u}^{n+1,(k)}) dt$ 
6:    $\rho^{n+1,(k+1)} E^{*,(k+1)} \leftarrow (\rho E)^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho E \vec{u}^{n+1,(k)}) dt$ 
7:    $\rho^{n+1,(k+1)} s^{*,(k+1)} \leftarrow (\rho s)^n + \int_{t^n}^{t^{n+1}} \nabla \cdot (\rho s \vec{u}^{n+1,(k)}) dt$ 
8:    $s^{n+1,(k+1)} \leftarrow s^{*,(k+1)} + \Delta t (\Omega^{*,(k+1)} s^{*,(k+1)} - s^{*,(k+1)} \Omega^{*,(k+1)} + 2G(\bar{D}^{*,(k+1)} - (D^p)^{*,(k+1)}))$ 
9:    $\vec{u}^{*,*,(k+1)} \leftarrow \vec{u}^{*,(k+1)} + \Delta t \frac{\nabla \cdot (2(\mu + \mu_{\text{Lax}}) D^{*,*,(k+1)})}{\rho^{n+1,(k+1)}}$ 
10:   $T^{*,*,(k+1)} \leftarrow T^{*,(k+1)} + \Delta t \frac{\nabla \cdot ((k+k_{\text{Lax}}) \nabla T^{*,*,(k+1)})}{\rho^{n+1,(k+1)} c_v}$ 
11:   $\vec{u}^{***,(k+1)} \leftarrow \vec{u}^{*,*,(k+1)} + \Delta t \frac{\nabla \cdot s^{*,(k+1)}}{\rho^{n+1,(k+1)}}$ 
12:   $T^{***,(k+1)} \leftarrow T^{*,*,(k+1)} + \Delta t \frac{\nabla \vec{u}^{***,(k+1)} : s^{*,(k+1)}}{\rho^{n+1,(k+1)} c_v}$ 
13:   $p^{*,(k+1)} \leftarrow p(\rho^{n+1,(k+1)}, e^{***,(k+1)})$ 
14:   $c^{*,(k+1)} \leftarrow c(\rho^{n+1,(k+1)}, e^{***,(k+1)})$ 
15:   $\begin{pmatrix} \vec{u}^{n+1,(k+1)} \\ p^{n+1,(k+1)} \end{pmatrix} \leftarrow \begin{pmatrix} \vec{u}^{***,(k+1)} - \Delta t \frac{\nabla p^{n+1,(k+1)}}{\rho^{n+1,(k+1)}} \\ p^{*,(k+1)} - \Delta t \rho^{n+1,(k+1)} (c^{*,(k+1)})^2 \nabla \cdot \vec{u}^{n+1,(k+1)} \end{pmatrix}$ 
16:   $E^{n+1,(k+1)} \leftarrow E^{***,(k+1)} - \Delta t \frac{\nabla \cdot (\vec{u} p)^{n+1,(k+1)}}{\rho^{n+1,(k+1)}}$ 
17:   $k \leftarrow k + 1$ 
18: end while

```

3. We have done extensive testing of our numerical method and have found that Lax artificial diffusion to be necessary only for stiff elastic materials. We have found that adding Lax diffusion to liquid materials would impose excessive damping.
- 120 4. We are only aware of proofs for the Godunov method and fractional step Lax-Friedrichs method for isentropic gas dynamics[52]. Neither of these methods are asymptotically preserving.
- 125 5. Our numerical algorithm never requires the solution of nonlinear algebraic equations, thereby avoiding robustness problems in which a discrete solution cannot be found or avoiding problems in which the discrete solution is not unique.

2 Equations for Multiphase and Multimaterial flows interacting with elastic materials.

We assume that we have M materials total consisting of M_e elastic materials and M_f fluid materials. Referring to Figure ??, the elastic materials occupy the regions in which the elastic level set function[32], ϕ_{m_e} , is positive:

$$\Omega_{m_e}(t) = \{(\vec{x}, t) | \phi_{m_e}(\vec{x}, t) \geq 0\} \quad (21)$$

A fluid material, m_f , occupies the region in which all of the elastic level set functions[32] are negative, and the fluid material level set function is positive:

$$\Omega_{m_f}(t) = \{(\vec{x}, t) | \phi_{m_e}(\vec{x}, t) < 0 \text{ and } \phi_{m_f}(\vec{x}, t) > 0\} \quad (22)$$

Also, referring to Figure ??, we discretize the interface(s) using the “continuous moment of fluid method” [55]. The volume fraction and centroid in a given computational cell, Ω , are defined as:

$$F_m = \frac{\int_{\Omega} H(\phi_m) d\vec{x}}{|\Omega|} \quad (23)$$

$$\vec{x}_m = \frac{\int_{\Omega} \vec{x} H(\phi_m) d\vec{x}}{|\Omega| F_m} \quad (24)$$

$H(\phi)$ is the Heaviside function defined as:

$$H(\phi) = \begin{cases} 1 & \phi \geq 0 \\ 0 & \phi < 0 \end{cases} \quad (25)$$

2.1 Governing Equations in the bulk regions of a given material

In the bulk regions of a given material we have the following equations for compressible materials[21]:

$$\rho_t + \nabla \cdot (\rho \vec{u}) = 0 \quad (26)$$

$$(\rho \vec{u})_t + \nabla \cdot (\rho \vec{u} \otimes \vec{u} + p \mathbb{I} - \tau) = \vec{F}_{body} \quad (27)$$

$$(\rho E)_t + \nabla \cdot ((\rho E + p) \vec{u} - \vec{u} \cdot \tau - k \nabla T) = \vec{u} \cdot \vec{F}_{body} \quad (28)$$

$$\tau = 2\mu \bar{D} \quad (29)$$

145

$$\bar{D} = D - \frac{\text{Trace}(D) \mathbb{I}}{\text{Trace}(\mathbb{I})} \quad (30)$$

$$D = \frac{\nabla \vec{u} + (\nabla \vec{u})^T}{2} \quad (31)$$

$$\rho E = \rho e_{\text{int}} + \frac{1}{2} \rho |\vec{u}|^2 \quad (32)$$

$$p = p(\rho, e) \quad e = c_v T \quad c^2 = p_\rho + \frac{p_e p}{\rho^2} \quad (33)$$

150 If the material is a viscoelastic FENE-CR material, then one has the additional equation for the configuration tensor A [41],

$$(\rho A)_t + \nabla \cdot (\rho \vec{u} A) = \rho (A \cdot (\nabla \vec{u})^T + \nabla \vec{u} \cdot A - \frac{f(R)}{\lambda} (A - \mathbb{I})), \quad (34)$$

and the momentum constitutive law is modified,

$$\tau = \tau + \frac{\tilde{\eta}_P}{\lambda} f(R) A. \quad (35)$$

If the material is an elastic material undergoing plastic deformation, then one has the following additional equation for the deviatoric stress tensor[43, 44, 29]

$$(\rho s)_t + \nabla \cdot (\rho \vec{u} s) = \rho (\Omega s - s \Omega + 2G(\bar{D} - D^p)), \quad (36)$$

and the momentum constitutive law is modified,

$$\tau = \tau + s. \quad (37)$$

155 If the material is an elastic material undergoing plastic deformation, then the plastic strain equation is solved too,

$$\epsilon_t^p + \vec{u} \cdot \nabla \epsilon^p = \sqrt{\frac{2}{3}} |\Lambda|. \quad (38)$$

$$|\Lambda| = \sqrt{\frac{3}{2}} \sqrt{D^p : D^p} \quad (39)$$

$$D^p = \Lambda N \quad N = \sqrt{3/2} \frac{s}{S_e} \quad (\dot{\epsilon}^p)^2 = \frac{2}{3} \Lambda^2 \quad (40)$$

Ω is the spin tensor,

$$\Omega_{ij} = \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} - \frac{\partial u_j}{\partial x_i} \right) \quad (41)$$

160 The effective stress is defined as,

$$S_e = \sqrt{\frac{3}{2}} \sqrt{s : s} \quad (42)$$

The Johnson-Cook model yield stress is given by,

$$\sigma_y = (A + B(\epsilon^p)^n)(1 + C \ln(\frac{\dot{\epsilon}^p}{\dot{\epsilon}_0}))(1 - \theta^m) \quad \theta = \frac{T - T_0}{T_m - T_0} \quad (43)$$

One form of the Zerilli Armstrong model yield stress is given by,

$$\beta = \beta_0 - \beta_1 \log(\dot{\epsilon}^p / \dot{\epsilon}_{ref}^p) \quad (44)$$

$$\sigma_y = A + B(\epsilon^p)^n e^{-\beta T} \quad (45)$$

The energy contribution due to elasto-plastic deformation is modeled as,

$$\beta \dot{\epsilon}^p S_e, \quad (46)$$

165 and is added to (28). In order to determine Λ , as it appears in (40), a “radial return algorithm” is implemented as given by Algorithm 3. We refer the reader also to [43] for the case when $n = 1$ in (43) or (45).

2.2 Governing Equations at immiscible interfaces

170 At an interface separating two materials, m_{source} and m_{dest} , with possible phase change[33, 47, 46, 45, 55], the interface velocity is either:

$$\vec{u}_\Gamma = \vec{u}_{m_{source}} + \frac{|\dot{m}|}{\rho_{m_{source}}} \vec{n}_\Gamma \quad (47)$$

or

$$\vec{u}_\Gamma = \vec{u}_{m_{dest}} + \frac{|\dot{m}|}{\rho_{m_{dest}}} \vec{n}_\Gamma. \quad (48)$$

Algorithm 3 Radial return algorithm for determining the plastic strain rate tensor D^p .

```

1:  $k \leftarrow 0$ 
2:  $\dot{\epsilon}^p \leftarrow 0$ 
3:  $S_e \leftarrow \sqrt{\frac{3}{2}} \sqrt{s : s}$ 
4: while  $k \leq 1$  do
5:    $\sigma_y \leftarrow \sigma_y(T, \epsilon^p, \dot{\epsilon}^p)$ 
6:   if  $S_e \leq \sigma_y$  then
7:      $\Lambda \leftarrow 0, D^p \leftarrow 0$ 
8:   else
9:     Solve for  $\epsilon_{new}^p$ :  $S_e - \sigma_y = 3G(\epsilon_{new}^p - \epsilon^p) + B((\epsilon_{new}^p)^n - (\epsilon^p)^n)$ 
10:     $\dot{\epsilon}^p \leftarrow \frac{\epsilon_{new}^p - \epsilon^p}{\Delta t}$ 
11:     $\Lambda \leftarrow \sqrt{\frac{3}{2}} \dot{\epsilon}^p$ 
12:     $D^p \leftarrow \Lambda N$ 
13:   end if
14:    $k \leftarrow k + 1$ 
15: end while

```

$\vec{n}_\Gamma$ is the interface normal vector pointing from material m_{dest} to material m_{source} .

The rate of mass transfer is,

$$\dot{m} = \frac{k_{m_{source}} \nabla T_{m_{source}} - k_{m_{dest}} \nabla T_{m_{dest}}}{L} \cdot \vec{n}_\Gamma. \quad (49)$$

175 The phase change interface temperature condition is,

$$T_{m_{source}} = T_{m_{dest}} = T_{\text{saturation}}(P_{\text{equilibrium}}) \quad (50)$$

Let the tensor σ represent pressure, viscosity, viscoelastic, and elastic contributions to the momentum equations. One has:

$$\sigma = -p\mathbb{I} + \tau. \quad (51)$$

The stress jump conditions are

$$\vec{n}_\Gamma \cdot (-\sigma_{m_{source}} + \sigma_{m_{dest}}) \cdot \vec{n}_\Gamma = -\gamma \kappa_\Gamma - \dot{m}^2 \left(\frac{1}{\rho_{m_{source}}} - \frac{1}{\rho_{m_{dest}}} \right) \quad (52)$$

$$(\vec{t}_{i,tangent})_{m_{source}} \cdot (-\sigma_{m_{source}} + \sigma_{m_{dest}}) \cdot \vec{n}_\Gamma = 0 \quad i = 1, 2 \quad (53)$$

180 The interface curvature is,

$$\kappa_\Gamma = \nabla \cdot \vec{n}_\Gamma \quad (54)$$

3 Discretization for multiphase flows interacting with elastic materials

In Algorithm 4 we give the overall temporal discretization of our asymptotically preserving multiphase flow method. The Algorithm 4 is very similar to that described in [21] except for the following key differences:

1. The present algorithm is staggered. Please refer to Figures 1, 2, and 3. A staggered algorithm has better stability properties than a collocated method[26, 42, 40, 18].
2. In order to accurately allow for droplets and/or bubbles to interact with elastic materials, we have made the following modifications to [21]:
 - (a) Steps 8 through 10 in Algorithm 4: The elastic material volume of fluid equations and level set equations are numerically solved using an “extended” velocity field. Please refer to Figure ??.
 - (b) Because the elastic force (step 26, Algorithm 4) is applied with a smoothed Heaviside function, we must make sure that the deviatoric stress tensor s_{m_e} is well defined in a narrow band just outside of material m_e : $\phi_{m_e} > -\alpha\Delta x$. This is achieved by steps 18 and 19 of Algorithm 4. Please see Figure ??. In our numerical experiments, we always have $\alpha = 4$.
 - (c) As recommended by [40], the viscous force and pressure gradient force are first approximated without the inclusion of surface tension; please see Steps 25 through 29 of Algorithm 4. Then the viscous force and pressure gradient force are recomputed in steps 31 through 33 in which the surface tension force is included and the velocity in the elastic material regions is fixed to the velocity after step 29.
 - (d) the static or dynamic contact angle is enforced by way of extending the level set function and volume of fluid functions from the fluid regions into the elastic regions; please see step 11 of Algorithm 4. The extension algorithm is the same as that described in our earlier work[3] except that in the present article, we are considering flexible substrates whereas in [3] the substrate only underwent rigid motion. By construction, our present algorithm for contact line dynamics on elastic materials recovers exactly the corresponding contact line dynamics on substrates undergoing rigid motion in the limit that the elastic materials’ motion approaches rigid motion.
3. We have developed an exactly mass and volume preserving algorithm so that mass and volume of fluid and elastic materials do not change due to contact line dynamics (e.g. splashing or sliding), or flotsam removal. Please see Algorithms 9 and 10. Also see Figure 6.

Remarks:

1. Step 33 of Algorithm 4 corresponds to solving the following, linear, pressure equation,

$$-\frac{p - \tilde{p}}{\rho c^2 \Delta t} + \nabla \cdot \frac{\nabla p}{\rho} = \frac{\nabla \cdot \vec{u}^*}{\Delta t}, \quad (55)$$

where $p \equiv p^{n+1, (k+1)}$ and $\vec{u}^{*, (k+1)} \equiv \vec{u}^*$.

2. The phase change algorithm[46, 45, 55], given by steps 14 and 15 in Algorithm 4, is described in more detail in Algorithm 5. Please also see Figure 4.
3. The multimaterial reinitialization algorithm, given by step 13 in Algorithm 4, is described in detail in [55].
4. The flotsam removal algorithm, given by step 12 in Algorithm 4, is described in more detail in Algorithm ??.
5. The algorithm for deriving the face centered density, needed in steps 26, 29, and 33 of Algorithm 4, is described in more detail in Algorithm ??. Please also see Figure 5.
6. The algorithm for deriving the face centered surface tension force, needed in step 32 of Algorithm 4, is described in more detail in our earlier work[28].

3.1 Time step stability restrictions

The time step, Δt , must satisfy the following conditions[55, 28].

1. **CFL condition** In order that characteristics do not collide, the following CFL condition holds:

$$\Delta t \leq \frac{1}{2} \frac{\min \Delta x}{\max |\vec{u}|_\infty}$$

2. **Phase change CFL condition**

$$\Delta t \leq \frac{1}{2} \frac{\min \Delta x}{\max |\vec{u}^{\text{phase change}}|_\infty}$$

3. **Surface tension stability constraint**

$$\Delta t \leq \frac{1}{2} (\min \Delta x^{3/2}) \sqrt{\frac{\rho_\Gamma}{2\pi\sigma_\Gamma}}$$

ρ_Γ is given by Algorithm 8 when $(\nabla H)_\Gamma \neq 0$.

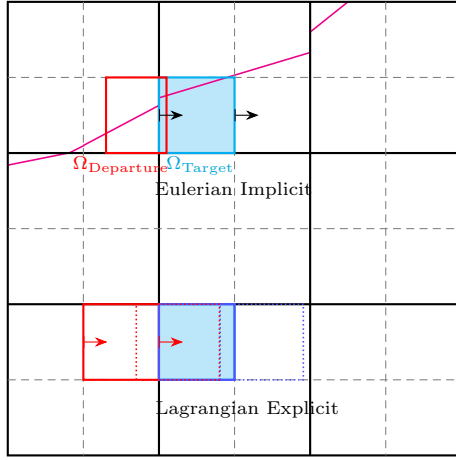


Figure 1: Illustration of the Eulerian Implicit, Lagrangian Explicit cell integrated semi-Lagrangian (CISL) method[21, 39]. Rather than have separate traversals through the grid for the cell-centered, face centered, and edge centered variables, we instead interpolate all variables to a refined grid, followed by one traversal through the refined grid, and then conservatively average the respective results back to their defined control volumes.

4. Elastic material stability constraint

$$U_{elastic} = \sqrt{\frac{8s:s}{\rho G}}$$

$$\Delta t \leq \frac{1}{2} \frac{\min \Delta x}{\max |U_{elastic}|}$$

Remark:

In contrast to [55], we choose the EI-LE advection algorithm[21, 39] rather than the Weymouth and Yue algorithm[50], since the EI-LE has a less stringent time step constraint. The drawback of using EI-LE is that it is not exactly volume preserving in 3D; but this is inconsequential for the present paper since we have developed an algorithm for exactly conserving the volume. Please see Algorithm 10 and Figure 6.

References

- [1] ALMGREN, A. S., BELL, J. B., RENDLEMAN, C. A., AND ZINGALE, M. Low mach number modeling of type ia supernovae. i. hydrodynamics. *The Astrophysical Journal* 637, 2 (2006), 922–936.

Algorithm 4 Multiphase flows interacting with elastic materials

```

1:  $k \leftarrow 0$ 
2:  $\vec{u}^{n+1,(k)} \leftarrow \vec{u}^n$ 
3: while  $k \leq 1$  do
4:    $F_m^{n+1,(k+1)} \leftarrow F_m^n + \int_{t^n}^{t^{n+1}} \vec{u}^{n+1,(k)} \cdot \nabla F_m dt \quad m \in [1, M]$ 
5:    $\phi_m^{n+1,(k+1)} \leftarrow \phi_m^n + \int_{t^n}^{t^{n+1}} \vec{u}^{n+1,(k)} \cdot \nabla \phi_m dt \quad m \in [1, M]$ 
6:    $\vec{U} \leftarrow (\rho, \rho \vec{u}, \rho E, \rho s)^T$ 
7:    $(F\vec{U})_m^{*,(k+1)} \leftarrow (F\vec{U})_m^n + \int_{t^n}^{t^{n+1}} \nabla \cdot ((F\vec{U})_m \otimes \vec{u}^{n+1,(k)}) dt \quad m \in [1, M]$ 
8:    $\vec{u}^{extend} \leftarrow \text{Extend}(\vec{u}^{n+1,(k)}) \quad \triangleright \text{from elastic region to fluid}$ 
9:    $F_m^{n+1,(k+1)} \leftarrow F_m^n + \int_{t^n}^{t^{n+1}} \vec{u}^{extend} \cdot \nabla F_m dt \quad m \in [1, M_e]$ 
10:   $\phi_m^{n+1,(k+1)} \leftarrow \phi_m^n + \int_{t^n}^{t^{n+1}} \vec{u}^{extend} \cdot \nabla \phi_m dt \quad m \in [1, M_e]$ 
11:   $\phi_m^{n+1,(k+1)} \leftarrow \text{Extend}(\phi_m^{n+1,(k+1)}) \quad \triangleright \text{from fluid region into elastic}$ 
12:   $F_m^{n+1,(k+1)} \leftarrow \text{Remove Flotsam}(F_m^{n+1,(k+1)})$ 
13:  Reinitialize  $\phi_m^{n+1,(k+1)}$  to be signed distance.
14:   $\phi_{m_{source}} \leftarrow \phi_{m_{source}} - \Delta t \frac{|\dot{m}|}{\rho}$ 
15:   $\phi_{m_{dest}} \leftarrow \phi_{m_{dest}} + \Delta t \frac{|\dot{m}|}{\rho}$ 
16:   $\dot{m}_{correct} \leftarrow \text{Mass Correction}(\text{Mass Current}, \text{Mass Target})$ 
17:  for  $m = 1, \dots, M_e$  do
18:     $\vec{u}^{extend} \leftarrow \text{Extend}(\vec{u}^{*,(k+1)}) \quad \triangleright \text{from elastic region } m \text{ to outside}$ 
19:     $s^{extend} \leftarrow \text{Extend}(s_m^{*,(k+1)}) \quad \triangleright \text{from elastic region } m \text{ to outside}$ 
20:     $\Omega_{ij} \leftarrow \frac{1}{2}(u_{i,j}^{extend} - u_{j,i}^{extend})$ 
21:     $D_{ij} \leftarrow \frac{1}{2}(u_{i,j}^{extend} + u_{j,i}^{extend})$ 
22:     $s_m^{n+1,(k+1)} \leftarrow s^{extend} + \Delta t(\Omega s^{extend} - s^{extend} \Omega + 2G_m(\bar{D} - D^p))$ 
23:  end for
24:   $T^{**, (k+1)} \leftarrow T^{*, (k+1)} + \Delta t \frac{\nabla \cdot ((k+k) \text{Lax}) \nabla T^{**, (k+1)}}{\rho^{n+1, (k+1)} c_v}$ 
25:   $\vec{u}^{**, (k+1)} \leftarrow \vec{u}^{*, (k+1)} + \Delta t \frac{\nabla \cdot (2(\mu + \mu) \text{Lax}) D^{**, (k+1)}}{\rho^{n+1, (k+1)}}$ 
26:   $\vec{u}^{**, (k+1)} \leftarrow \vec{u}^{*, (k+1)} + \Delta t \frac{\sum_{m=1}^{M_e} \nabla \cdot (H_{\alpha \Delta x}(\phi_m) s_m^{*, (k+1)})}{\rho^{n+1, (k+1)}}$ 
27:   $T_m^{**, (k+1)} \leftarrow T_m^{*, (k+1)} + \Delta t \frac{\nabla \vec{u}^{**, (k+1)} : \tau_m}{\rho_m^{n+1, (k+1)} c_{v, m}} \quad m \in [1, M]$ 
28:   $\tilde{\rho} \leftarrow \rho^{n+1, (k+1)} \quad \tilde{p} \leftarrow p(\tilde{\rho}, e^{**, (k+1)}) \quad c^2 \leftarrow c^2(\tilde{\rho}, e^{**, (k+1)})$ 
29:   $\begin{pmatrix} \vec{u}^{n+1, (k+1)} \\ p^{n+1, (k+1)} \end{pmatrix} \leftarrow \begin{pmatrix} \vec{u}^{**, (k+1)} - \Delta t \frac{\nabla p^{n+1, (k+1)}}{\tilde{\rho}} \\ \tilde{p} - \Delta t \tilde{\rho} c^2 \nabla \cdot \vec{u}^{n+1, (k+1)} \end{pmatrix}$ 
30:   $E^{n+1, (k+1)} \leftarrow E^{**, (k+1)} - \Delta t \frac{\nabla \cdot (\vec{u} p)^{n+1, (k+1)}}{\tilde{\rho}}$ 
31:   $\vec{u}^{**, (k+1)} \leftarrow \vec{u}^{*, (k+1)} + \Delta t \frac{\nabla \cdot (2(\mu + \mu) \text{Lax}) D^{**, (k+1)}}{\tilde{\rho}} \quad \triangleright \vec{u}_{m_e} \text{ clamped}$ 
32:   $\vec{u}^{**, (k+1)} \leftarrow \vec{u}^{*, (k+1)} - \Delta t \frac{\sum_{\Gamma} \gamma_{\Gamma} \kappa_{\Gamma} \nabla H_{\Gamma}}{\tilde{\rho}}$ 
33:   $\begin{pmatrix} \vec{u}^{n+1, (k+1)} \\ p^{n+1, (k+1)} \end{pmatrix} \leftarrow \begin{pmatrix} \vec{u}^{**, (k+1)} - \Delta t \frac{\nabla p^{n+1, (k+1)}}{\tilde{\rho}} \\ \tilde{p} - \Delta t \tilde{\rho} c^2 \nabla \cdot \vec{u}^{n+1, (k+1)} \end{pmatrix} \quad \triangleright \vec{u}_{m_e} \text{ clamped}$ 
34:   $k \leftarrow k + 1$ 
35: end while

```

Algorithm 5 Phase change algorithm

- 1: For each cell in a narrow band about the interface, use the closest point map to find the corresponding closest point on the interface. Approximate the phase change speed, $|\dot{m}|/\rho$ at the closest point. (Figure 4)
 - 2: extend the phase change speed $|\dot{m}|/\rho$ further into bulk regions.
 - 3: Advect the volume fractions using unsplit CISL advection with velocity $|\dot{m}|\vec{n}_\Gamma/\rho$.
 - 4: The overall mass correction in order to conserve mass due to expansion or compression is: $M_{cor} = \sum (F_{dest}^{new} - F_{dest}^{old}) V_{grid} (\rho_{m_s} - \rho_{m_d})$.
 - 5: If the interface velocity is in the form $\vec{u}_I = \vec{u}_{m_d} + \frac{|\dot{m}|}{\rho_{m_d}} \vec{n}_\Gamma$, then distribute M_{cor} at least two cells deep into the source material m_s .
 - 6: If the interface velocity is in the form $\vec{u}_I = \vec{u}_{m_s} + \frac{|\dot{m}|}{\rho_{m_s}} \vec{n}_\Gamma$, then distribute M_{cor} at least two cells deep into the destination material m_d .
 - 7: If the material with the distributed mass, M_{cor} , is an incompressible material, then M_{cor} becomes a source term for the velocity projection equation, otherwise, the density is incremented accordingly.
-

Algorithm 6 Algorithm for determining the unique material number associated with a given grid cell

Require: Level set functions ϕ_m for $m = 1, \dots, M$.

Ensure: $m_{primary}$

- 1: $m_e \leftarrow \max \phi_m$ m is elastic
 - 2: **if** $\phi_{m_e} \geq 0$ **then**
 - 3: $m_{primary} \leftarrow m_e$
 - 4: **else**
 - 5: $m_{max} \leftarrow \max \phi_m$ m is not elastic
 - 6: $m_{primary} \leftarrow m_{max}$
 - 7: **end if**
-

Algorithm 7 Algorithm for determining $(\nabla H_\Gamma)_{i+1/2,j}$ at cell face $(i+1/2, j)$

Require: Level set functions $(\phi_m)_{i,j}$ for $m = 1, \dots, M$.

Require: Level set functions $(\phi_m)_{i+1,j}$ for $m = 1, \dots, M$.

Ensure: $(\nabla H_\Gamma)_{i+1/2,j}$

- 1: m_L obtained from $(\phi_m)_{i,j}$ ▷ Algorithm 6
 - 2: m_R obtained from $(\phi_m)_{i+1,j}$ ▷ Algorithm 6
 - 3: **if** m_L is an elastic material **then**
 - 4: $(\nabla H_\Gamma)_{i+1/2,j} \leftarrow 0$
 - 5: **else if** m_R is an elastic material **then**
 - 6: $(\nabla H_\Gamma)_{i+1/2,j} \leftarrow 0$
 - 7: **else if** $m_R == m_L$ **then**
 - 8: $(\nabla H_\Gamma)_{i+1/2,j} \leftarrow 0$
 - 9: **else if** $m_R < m_L$ **then**
 - 10: $(\nabla H_\Gamma)_{i+1/2,j} \leftarrow \frac{1}{\Delta x}$
 - 11: **else**
 - 12: $(\nabla H_\Gamma)_{i+1/2,j} \leftarrow -\frac{1}{\Delta x}$
 - 13: **end if**
-

Algorithm 8 Algorithm for determining the face centered density, $\rho_{i+1/2,j}$ at cell face $(i+1/2, j)$

Require: Level set functions $(\phi_m)_{i,j}$ for $m = 1, \dots, M$. ▷ Figure 5

Require: Level set functions $(\phi_m)_{i+1,j}$ for $m = 1, \dots, M$. ▷ Figure 5

Require: Tessellating interface reconstruction in cell (i, j) ▷ Figure 5

Require: Tessellating interface reconstruction in cell $(i+1, j)$ ▷ Figure 5

Require: refined density $(\rho_m)_{2i+1,2j}, \dots, (\rho_m)_{2i+2,2j+1}$ for $m = 1, \dots, M$ ▷ Figure 5

Ensure: $\rho_{i+1/2,j}$

- 1: $\text{mass}_{i+1/2,j}^L \leftarrow \sum_{m=1}^M \sum_{j_f=2j}^{2j+1} |\Omega_{ij} \cap \Omega_{i+1/2,j} \cap \Omega_{m,ij}| (\rho_m)_{2i+1,j_f}$
 - 2: $\text{mass}_{i+1/2,j}^R \leftarrow \sum_{m=1}^M \sum_{j_f=2j}^{2j+1} |\Omega_{i+1,j} \cap \Omega_{i+1/2,j} \cap \Omega_{m,i+1,j}| (\rho_m)_{2i+2,j_f}$
 - 3: $\rho_{i+1/2,j} \leftarrow (\text{mass}_{i+1/2,j}^L + \text{mass}_{i+1/2,j}^R) / |\Omega_{i+1/2,j}|$
 - 4: Determine $(\nabla H_{m_L, m_R})_{i+1/2,j}$, m_L , and m_R from Algorithm 7.
 - 5: **if** $\gamma_{m_L, m_R} \nabla H_{m_L, m_R} \neq 0$ **then**
 - 6: $\rho_{i+1/2,j} \leftarrow \max(\rho_{i+1/2,j}, \theta \rho_{m_L}, \theta \rho_{m_R})$
 - 7: **end if**
-

Algorithm 9 Algorithm for distributing mass from material parcels, $\Omega_{m,i}^n$ at time $t = t^n$ to parcels at $t = t^{n+1}$, $\Omega_{m,k}^{n+1}$. m is the material id, i is the old parcel id, and k is the new parcel id.

```

1: Determine the intersection mass between parcels  $\Omega_{m,i}^n$  and  $\Omega_{m,k}^{n+1}$ . Parcels in
   which only buffer regions intersect are assigned  $\epsilon$  mass weights.
2: Associate each “orphan” parcel,  $\Omega_{m,i}^{n,orphan}$ , with the parcel,  $\Omega_{m,k}^{n+1}$ , that has
   the closest centroid. The mass weight of association is  $\epsilon$ .
3: Associate each “orphan” parcel,  $\Omega_{m,k}^{n+1,orphan}$ , with the parcel,  $\Omega_{m,i}^n$ , that
   has the closest centroid. The mass weight of association is  $\epsilon$ .
4:  $\text{mass}_{m,k}^{n+1} \leftarrow 0$ ,  $m = 1, \dots, n_{mat}$ ,  $k = 1, \dots, n_{m,parcel}^{n+1}$ 
5: for  $m = 1, \dots, n_{mat}$  do
6:   for  $k = 1, \dots, n_{m,parcel}^{n+1}$  do
7:      $\text{weight} \leftarrow 0$ 
8:     for  $i = 1, \dots, n_{m,parcel}^n$  do
9:        $\text{weight} \leftarrow \text{weight} + \text{weight}_{m,i,k}$ 
10:    end for
11:    for  $i = 1, \dots, n_{m,parcel}^n$  do
12:       $\text{mass}_{m,k}^{n+1} \leftarrow \text{mass}_{m,k}^{n+1} + \text{weight}_{m,i,k} \text{mass}_{m,i}^n / \text{weight}$ 
13:    end for
14:  end for
15: end for

```

Algorithm 10 Algorithm for adjusting the actual mass, m^{act} , of material parcels, $\Omega_{m,k}^{n+1}$, with the parcel’s reference mass m^{ref} .

```

1: for all grid cells  $\Omega_l$  in parcel  $\Omega_{m,k}^{n+1}$  do
2:    $\delta m \leftarrow \frac{1}{2}(m^{ref} - m^{act}) \frac{|\Omega_l|}{|\Omega_{m,k}^{n+1}|}$ 
3:   if incompressible material then
4:      $\frac{\delta m}{\rho_l \Delta t^2 |\Omega_l|}$  becomes a source term for (55).
5:   end if
6: end for

```

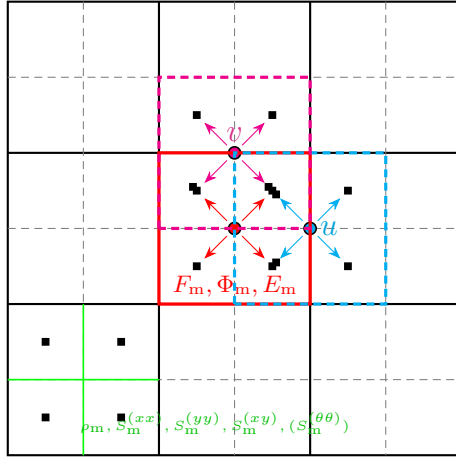


Figure 2: The material volume fractions, F_m , level set functions, ϕ_m , and total energy, E_m , are stored at cell centers and then consistently interpolated to the refined grid in preparation for Cell Integrated Semi-Lagrangian advection[21, 39]. The velocity (u, v) is piecewise constant interpolated from the face centered (MAC grid) control volumes to the refined grid cell centers. The horizontal advective velocity, u^{advect} , is linearly interpolated to the refined grid face centers in the horizontal direction and is piecewise constant interpolated in the vertical direction. The vertical advective velocity, v^{advect} , is linearly interpolated in the vertical direction and piecewise constant interpolated in the horizontal direction. The material density ρ_m and deviatoric stress tensor components, $s_m^{xx,xy,yy,\Theta\Theta}$ (RZ), are already discretized on the refined grid.

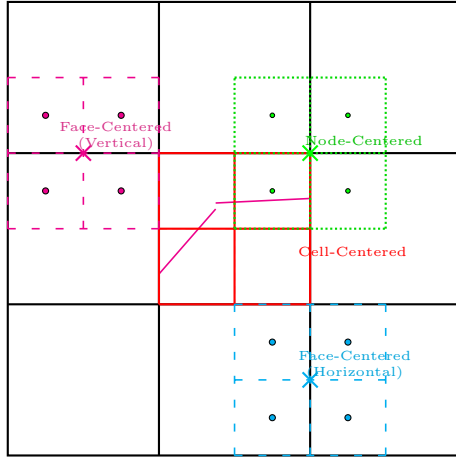


Figure 3: After Cell Integrated Semi-Lagrangian advection[21, 39] on the refined grid, the cell centered variables, F_m , ϕ_m , and E_m , and the face centered variables, (u, v) , are conservatively “recombined” back to their respective control volume locations. The deviatoric stress tensor components, $s_m^{xx,yy,\Theta\Theta}$ (RZ), are conservatively recombined to the cell centered control volumes, and then piecewise constant prolonged back to the refined grid. The off-diagonal deviatoric stress tensor component, s_{xy} , is conservatively recombined to the node control volume (RZ) (edge centers in 3D), and then piecewise constant prolonged back to the refined grid. The material density, ρ_m , do not need to be recombined.

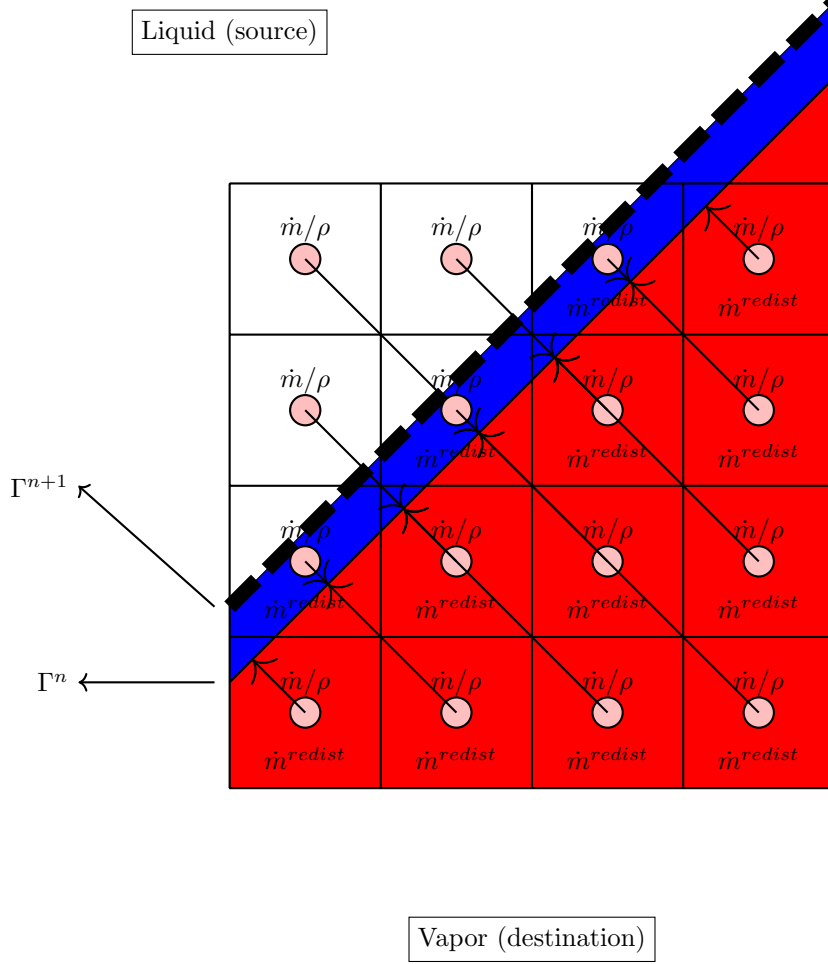


Figure 4: The phase change algorithm: (1) the phase change speed, $|\dot{m}|/\rho$, is approximated at all narrow band cells by evaluating $|\dot{m}|/\rho$ at the corresponding closest point on the interface (Γ^n). (2) The change in volume fraction due to unsplit CISL advection determines the overall mass correction, M_{cor} , due to expansion or compression, $M_{cor} = \sum (F_{dest}^{new} - F_{dest}^{old}) V_{grid} (\rho_{m_s} - \rho_{m_d})$. M_{cor} becomes a source term for the projection step if the material is incompressible, or directly increments the density if the material is compressible. (3) M_{cor} is distributed to the vapor (destination) side of the Γ^{n+1} interface if the interface speed is $\vec{u}_{m_s} + \frac{|\dot{m}|}{\rho_{m_s}} \vec{n}_\Gamma$, and M_{cor} is distributed to the liquid (source) side of the interface if the interface speed is $\vec{u}_{m_d} + \frac{|\dot{m}|}{\rho_{m_d}} \vec{n}_\Gamma$. Referring to the diagram, if distributing M_{cor} to the vapor side, M_{cor} must be all distributed beyond the blue region into the red region.

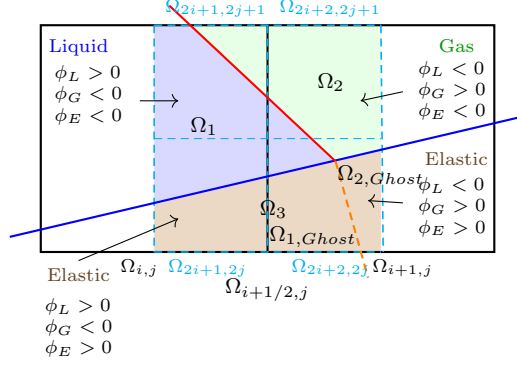


Figure 5: Example for determining the mixture density in face centered control volumes. In this case, the face is $(i + 1/2, j)$. Momentum conservation is guaranteed since the density for each material is discretized on the refined grid $(2i + 1, 2j)$, $(2i + 1, 2j + 1)$, $(2i + 2, 2j)$, and $(2i + 2, 2j + 1)$. The Fluid regions tessellate the computational domain $(\Omega_1, \Omega_{1,Ghost}, \Omega_2, \Omega_{2,Ghost})$ and the elastic material regions (Ω_3) are embedded within the computational domain. Prior to computing mixture density, we use the nested dissection algorithm in order to convert the material reconstruction so that Fluid and Elastic materials tessellate the computational domain $(\Omega_1, \Omega_2, \Omega_3)$.

- [2] AN, M., LIU, M., MA, Y., AND XU, X. Multi-scale vibration behavior of a graphite tube with an internal vapor–liquid–solid boiling flow. *Powder Technology* 291 (2016), 201–213.
- [3] ARIENTI, M., AND SUSSMAN, M. An embedded level set method for sharp-interface multiphase simulations of diesel injectors. *International Journal of Multiphase Flow* 59 (2014), 1–14.
- [4] BANKS, J. W., HENSHAW, W. D., AND SCHWENDEMAN, D. W. An analysis of a new stable partitioned algorithm for fsi problems. part i: Incompressible flow and elastic solids. *Journal of Computational Physics* 269 (2014), 108–137.
- [5] BANKS, J. W., HENSHAW, W. D., SCHWENDEMAN, D. W., AND TANG, Q. A stable partitioned fsi algorithm for rigid bodies and incompressible flow in three dimensions. *Journal of Computational Physics* 373 (2018), 455–492.
- [6] BIBAL, M., DEFERREZ, M., TANGUY, S., AND URBANO, A. A compressible solver for two phase-flows with phase change for bubble cavitation. *Journal of Computational Physics* 500 (2024), 112750.
- [7] BOSCARINO, S., RUSSO, G., AND SCANDURRA, L. All mach number second order semi-implicit scheme for the euler equations of gas dynamics. *Journal of Scientific Computing* 77, 2 (2018), 850–884.

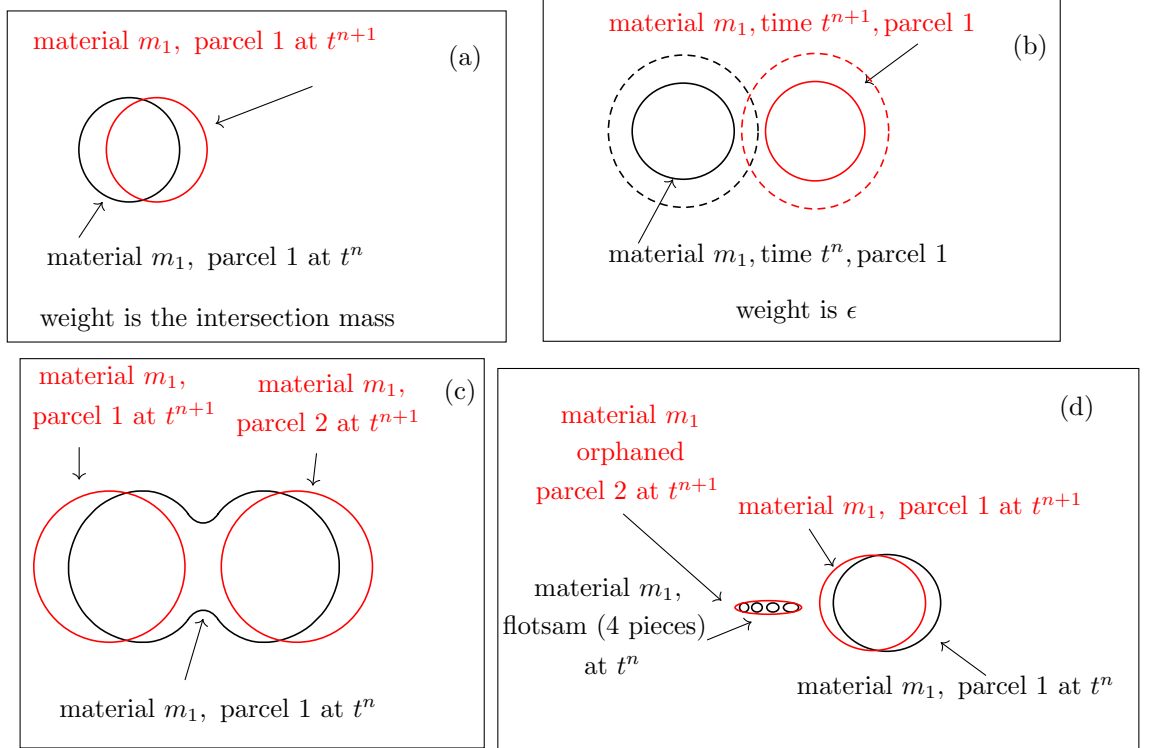


Figure 6: Illustration for associating material parcels at $t = t^n$ to material parcels at the new time $t = t^{n+1}$. In panels (a) and (c), the material parcels intersect so that the “weight of association” is given by the intersected mass. In panel (b), the parcel at t^n does not intersection the nearby parcel at t^{n+1} , but since they are within two grid cells from one another, they have a weight ϵ which is considered to be arbitrarily close to zero. In panel (d), parcel 2 at time t^{n+1} came from the coagulation of flotsam at time t^n . This parcel is an “orphan” parcel and is associated with weight ϵ with the parcel with the nearest centroid.

- [8] CAMACHO, G., AND ORTIZ, M. Adaptive lagrangian modelling of ballistic penetration of metallic targets. *Computer methods in applied mechanics and engineering* 142, 3-4 (1997), 269–301.
- [9] CHEN, H., ZHANG, A.-M., MING, F.-R., SUN, S.-L., AND PENG, Y.-X. Numerical simulation of the entire fluid-structure interaction process of ship structures subjected to underwater explosion. *Science China Physics, Mechanics & Astronomy* 69, 5 (2026), 254512.
- [10] CHERTOCK, A., KARNI, S., KURGANOV, A., AND MICALIZZI, L. A new asymptotic-preserving dual formulation finite-volume method for the compressible euler equations. *Computer Methods in Applied Mechanics and Engineering* 461 (2026), 119292.
- [11] CHOI, Y.-R., YEO, D., LEE, J.-C., CHO, J.-W., AND MOON, S. A novel ultrasonic leak detection system in nuclear power plants using rigid guide tubes with fcog and snr. *Sensors* 24, 20 (2024), 6524.
- [12] CUI, X.-Y., XUE, H., HAN, H.-Y., WANG, T., AND HUANG, G.-Y. Oblique penetration of spherical tungsten alloy projectiles on high-strength steel plates. *International Journal of Impact Engineering* 192 (2024), 105030.
- [13] DRESSAIRE, E., SAURET, A., BOULOGNE, F., AND STONE, H. A. Drop impact on a flexible fiber. *Soft matter* 12, 1 (2015), 200–208.
- [14] FERRARI, D., PESHKOV, I., ROMENSKI, E., AND DUMBSER, M. A unified htc multiphase model of continuum mechanics. *Journal of Computational Physics* 521 (2025), 113553.
- [15] GAO, M., MOSSIER, P., AND MUNZ, C.-D. Shock capturing for a high-order ale discontinuous galerkin method with applications to fluid flows in time-dependent domains. *Computers & Fluids* 269 (2024), 106124.
- [16] GAO, Y.-Q., ZHONG, Q., LIU, Y.-L., LI, S., ZHANG, J.-F., AND ZHANG, A. Study on the dynamics of underwater explosion bubbles near elastic-plastic cylindrical shells. *Physics of Fluids* 37, 10 (2025).
- [17] GRÉTARSSON, J. T., KWATRA, N., AND FEDKIW, R. Numerically stable fluid-structure interactions between compressible flow and solid structures. *Journal of Computational Physics* 230, 8 (2011), 3062–3084.
- [18] GUITTET, A., THEILLARD, M., AND GIBOU, F. A stable projection method for the incompressible navier-stokes equations on arbitrary geometries and adaptive quad/octrees. *Journal of Computational Physics* 292 (2015), 215–238.
- [19] HE, M., YAN, J., LV, P., DUAN, H., AND ZHANG, A.-M. Research on ice-breaking characteristics of underwater explosion bubbles based on an effective coupled model. *Applied Ocean Research* 153 (2024), 104259.

- [20] JEMISON, M., LOCH, E., SUSSMAN, M., SHASHKOV, M., ARIENTI, M., OHTA, M., AND WANG, Y. A coupled level set-moment of fluid method for incompressible two-phase flows. *Journal of Scientific Computing* 54, 2-3 (2013), 454–491.
- [21] JEMISON, M., SUSSMAN, M., AND ARIENTI, M. Compressible, multi-phase semi-implicit method with moment of fluid interface representation. *Journal of Computational Physics* 279 (2014), 182–217.
- [22] JEMISON, M., SUSSMAN, M., AND SHASHKOV, M. Filament capturing with the multimaterial moment-of-fluid method. *Journal of Computational Physics* 285 (2015), 149–172.
- [23] KLOPPE, M., AND ALAND, S. A phase-field model of elastic and viscoelastic surfaces in fluids. *Computer Methods in Applied Mechanics and Engineering* 428 (2024), 117090.
- [24] KWATRA, N., SU, J., GRÉTARSSON, J. T., AND FEDKIW, R. A method for avoiding the acoustic time step restriction in compressible flow. *Journal of Computational Physics* 228, 11 (2009), 4146–4161.
- [25] LAX, P. D. Weak solutions of nonlinear hyperbolic equations and their numerical computation. *Communications on Pure and Applied Mathematics* 7, 1 (1954), 159–193.
- [26] LE CHENADEC, V., AND PITSCH, H. A monotonicity preserving conservative sharp interface flow solver for high density ratio two-phase flows. *Journal of Computational Physics* 249 (2013), 185–203.
- [27] LEGER, M., MATOS, H., SHUKLA, A., AND JAVIER, C. Experimental evaluation of curved aluminum structures subjected to underwater explosions. *Experimental Mechanics* 63, 5 (2023), 925–937.
- [28] LI, G., LIAN, Y., GUO, Y., JEMISON, M., SUSSMAN, M., HELMS, T., AND ARIENTI, M. Incompressible multiphase flow and encapsulation simulations using the moment-of-fluid method. *International Journal for Numerical Methods in Fluids* 79, 9 (2015), 456–490.
- [29] MAIRE, P.-H., ABGRALL, R., BREIL, J., LOUBÈRE, R., AND REBOURCET, B. A nominally second-order cell-centered lagrangian scheme for simulating elastic–plastic flows on two-dimensional unstructured grids. *Journal of Computational Physics* 235 (2013), 626–665.
- [30] MENG, Z.-F., ZHANG, A.-M., YAN, J.-L., WANG, P.-P., AND KHAYYER, A. A hydroelastic fluid–structure interaction solver based on the riemann-sph method. *Computer Methods in Applied Mechanics and Engineering* 390 (2022), 114522.

- [31] MOKBEL, M., MOKBEL, D., LIESE, S., WEBER, C., AND ALAND, S. A simulation method for the wetting dynamics of liquid droplets on deformable membranes. *SIAM Journal on Scientific Computing* 46, 6 (2024), B806–B829.
- [32] OSHER, S., AND SETHIAN, J. A. Fronts propagating with curvature-dependent speed: algorithms based on hamilton-jacobi formulations. *Journal of computational physics* 79, 1 (1988), 12–49.
- [33] PALMORE JR, J., AND DESJARDINS, O. A volume of fluid framework for interface-resolved simulations of vaporizing liquid-gas flows. *Journal of Computational Physics* 399 (2019), 108954.
- [34] PARK, J., AND SON, G. A clsvoF method for simulating bubble motion in ultrasonic fields near a deformable solid cell. *Mathematics and Computers in Simulation* 250 (2026), 132–151.
- [35] PATKAR, S., AANJANEYA, M., LU, W., LENTINE, M., AND FEDKIW, R. Towards positivity preservation for monolithic two-way solid–fluid coupling. *Journal of Computational Physics* 312 (2016), 82–114.
- [36] ROBINSON-MOSHER, A., SCHROEDER, C., AND FEDKIW, R. A symmetric positive definite formulation for monolithic fluid structure interaction. *Journal of Computational Physics* 230, 4 (2011), 1547–1566.
- [37] SANDUSKY, H., CHAMBERS, P., ZERILLI, F., FABINI, L., AND GOTTWALD, W. Dynamic measurements of plastic deformation in a water-filled aluminum tube in response to detonation of a small explosives charge. *Shock and Vibration* 6, 3 (1999), 125–132.
- [38] SCANDURRA, L. Numerical methods for all mach number flows for gas dynamics.
- [39] SCARDOVELLI, R., AND ZALESKI, S. Interface reconstruction with least-square fit and split eulerian–lagrangian advection. *International Journal for Numerical Methods in Fluids* 41, 3 (2003), 251–274.
- [40] SHIN, S., CHERGUI, J., AND JURIC, D. Interaction of a deformable solid with two-phase flows: An eulerian-based numerical model for fluid-structure interaction using the level contour reconstruction method. *International Journal for Numerical Methods in Fluids* 92, 11 (2020), 1478–1505.
- [41] STEWART, P., LAY, N., SUSSMAN, M., AND OHTA, M. An improved sharp interface method for viscoelastic and viscous two-phase flows. *Journal of Scientific Computing* 35, 1 (2008), 43–61.
- [42] SUGIYAMA, K., II, S., TAKEUCHI, S., TAKAGI, S., AND MATSUMOTO, Y. A full eulerian finite difference approach for solving fluid structure coupling problems. *Journal of Computational Physics* 230, 3 (2011), 596–627.

- [43] TRAN, L., AND UDAYKUMAR, H. A particle-level set-based sharp interface cartesian grid method for impact, penetration, and void collapse. *Journal of Computational Physics* 193, 2 (2004), 469–510.
- 390 [44] UDAYKUMAR, H., TRAN, L., BELK, D., AND VANDEN, K. An eulerian method for computation of multimaterial impact with eno shock-capturing and sharp interfaces. *Journal of Computational Physics* 186, 1 (2003), 136–177.
- 395 [45] VAHAB, M., PEI, C., HUSSAINI, M. Y., SUSSMAN, M., AND LIAN, Y. An adaptive coupled level set and moment-of-fluid method for simulating droplet impact and solidification on solid surfaces with application to aircraft icing. In *54th AIAA Aerospace Sciences Meeting* (2016), p. 1340.
- 400 [46] VAHAB, M., SUSSMAN, M., AND SHOELE, K. Fluid-structure interaction of thin flexible bodies in multi-material multi-phase systems. *Journal of Computational Physics* 429 (2021), 110008.
- [47] VILLEGAS, L. R., ALIS, R., LEPILLIEZ, M., AND TANGUY, S. A ghost fluid/level set method for boiling flows and liquid evaporation: application to the leidenfrost effect. *Journal of Computational Physics* 316 (2016), 789–813.
- 405 [48] WANG, K. G. Multiphase fluid-solid coupled analysis of shock-bubble-stone interaction in shockwave lithotripsy. *International journal for numerical methods in biomedical engineering* 33, 10 (2017), e2855.
- [49] WARDLAW JR, A. B., AND LUTON, J. A. Fluid-structure interaction mechanisms for close-in explosions. *Shock and Vibration* 7, 5 (2000), 265–275.
- 410 [50] WEYMOUTH, G., AND YUE, D. K.-P. Conservative volume-of-fluid method for free-surface simulations on cartesian-grids. *Journal of Computational Physics* 229, 8 (2010), 2853–2865.
- 415 [51] WILFONG, B., LE BERRE, H. A., RADHAKRISHNAN, A., GUPTA, A., VICKERS, D. J., VACA-REVELO, D., ADAM, D., YU, H., LEE, H., CHREIM, J. R., CARCANA BARBOSA, M., ZHANG, Y., CISNEROS-GARIBAY, E., GNANASKANDAN, A., RODRIGUEZ JR, M., BUDIARDJA, R. D., ABBOTT, S., COLONIUS, T., AND BRYNGELSON, S. H. Mf5.0: An exascale many-physics flow solver. *Computer Physics Communications* 322 (2026), 110055.
- 420 [52] XIAXI, D., GUI-QIANG, C., AND PEIZHU, L. Convergence of the fractional step lax-friedrichs scheme and godunov scheme for the isentropic system of gas dynamics. *Communications in mathematical physics* 121, 1 (1989), 63–84.

- 425 [53] XIONG, Q., LIU, L., ZHU, X., LI, Y., WANG, T., AND DONG, X. Bubble dynamics and heat transfer characteristics during boiling of water droplets on flexible pdms substrates. *International Journal of Heat and Mass Transfer* 259 (2026), 128364.
- 430 [54] XU, W., ZHAI, Y., LUO, J., ZHANG, Q., AND LI, J. Experimental study of the influence of flexible boundaries with different elastic moduli on cavitation bubbles. *Experimental Thermal and Fluid Science* 109 (2019), 109897.
- 435 [55] YE, Z., ESTEBE, C., LIU, Y., VAHAB, M., HUANG, Z., SUSSMAN, M., MORADIKAZEROONI, A., SHOELE, K., LIAN, Y., OHTA, M., ET AL. An improved coupled level set and continuous moment-of-fluid method for simulating multiphase flows with phase change. *Communications on Applied Mathematics and Computation* 6, 2 (2024), 1034–1069.
- 440 [56] YIN, C., LIU, J., AND JIN, Z. Experimental and numerical study of the near-field underwater explosion of a circular plate coated by rigid polyurethane foam. *Ocean Engineering* 252 (2022), 111248.