

A Robust Numerical Algorithm for simulating the interaction of multiphase and multimaterial fluid(s) with flexible solid(s) *

Estebe, Cody

Dept. of math, FL State Univ.

Kumar Pal, Ashwani

Dept. of Mech. Engr., FL State Univ.

Lian, Yongsheng

Department of Mech. Engr., Univ. Louisville

Liu, Yang

Dept. of Mech. Engr., FL State Univ.

Moradikazerouni, Alireza

Dept. of Mech. Engr., FL State Univ.

Ohta, Mitsuhiro

Dept. of Mech. Sci, Tokushima University

Shoele, Kourosh

Dept. of Mech. Engr., FL State Univ.

Sussman, Mark

Dept. of math, FL State Univ.

July 29, 2026

ABSTRACT: A new Eulerian method is presented for simulating complex three dimensional and three dimensional axisymmetric flows consisting of any number of materials, to include compressible fluids, incompressible fluids, ice, melt, vapor, and solids undergoing plastic deformation. The interfaces between materials is modeled and discretized as sharp. The new method is robust with respect to a wide range of material properties, and large interface deformation. The new method is scalable on MIMD (Multi Instruction Distributed memory using MPI) and MISD (Multi Instruction Shared memory using OpenMP)

*this material is based upon work supported by National Aeronautics and Space Administration under grant number 80NSSC20K0352

computer systems. The new method is also scalable with respect to adaptive mesh refinement.

1 Introduction

The ability to simulate multiphase and multimaterial high and low speed flows, to include the interaction of fluid(s) and elastic material(s), has a number of applications: bubble growth and collapse interacting with flexible surfaces[37, 38, 35], wetting dynamics of liquid droplets on deformable membranes[23], design of breathable masks[10], underwater explosions near structures[21, 40, 7, 11, 14, 36, 27], hydroelastic applications[22], vibration of pipes due to internal boiling flow[2], ultrasonic leak detection in nuclear power plants[8], and the measurement of the tensile strength properties of colliding and deforming structures[9].

We are not aware of previously reported research on the robust numerical simulation of the interaction of multiphase flows with elastic materials, to include incompressible materials, weakly compressible materials, and/or strongly compressible materials. The research that we report here is a continuation of research that started with the following article by Jemison et al[16]. In Jemison et al’s research, a novel adaptive, parallel, asymptotically preserving[19, 5, 6, 28], moment-of-fluid method was presented for simulating two phase flows to include incompressible, low speed, and high speed flows. The method in Jemison et al was a colocated generalization of the projection method for incompressible flows[15] in order to simulate both compressible (with shock waves) and incompressible flows.

In the present work, we have improved upon [16] in the following important ways:

1. the present method is now a staggered grid method instead of colocated. See Figure ?? . The following research for incompressible flows underscore the importance of a staggered grid[20, 30, 29, 13] for projection methods.
2. the present method represents complex deforming interfaces using the Continuous Moment-of-Fluid method[39] (CMOF), instead of the Moment-of-Fluid (MOF) method[17]. The CMOF method[39] removes a “checkerboard instability” that appears for surface tension driven flows.
3. We have developed a conservative, staggered grid, algorithm for solving the equations associated with standard elastic materials and materials undergoing plastic deformation. Our new algorithm is an improvement on the algorithms reported in [30, 29] so that we can simulate both low and high speed fluid structure interaction problems. Our new method can simulate incompressible elastic materials or compressible elastic materials (with shock waves).

1.1 Further motivation for enhancing our asymptotically preserving algorithm from collocated grid to staggered grid

40 In this section, we just focus on single material compressible gas dynamics with a general equation of state. The derivations here are applicable to the general multimaterial case. The compressible gas dynamic equations[1, 6, 28] are:

$$\rho_t + \nabla \cdot (\rho \vec{u}) = 0 \quad (1)$$

$$(\rho \vec{u})_t + \nabla \cdot (\rho \vec{u} \otimes \vec{u} + pI) = 0 \quad (2)$$

$$(\rho E)_t + \nabla \cdot (\rho \vec{u} E + p \vec{u}) = 0 \quad (3)$$

45

$$E = e + \frac{1}{2} \vec{u} \cdot \vec{u} \quad (4)$$

$$p = p(\rho, e) \quad c^2 = p_\rho + \frac{pe_p}{\rho^2} \quad (5)$$

In accordance with the nondimensionalization steps in [1, 6, 28], the following scaling strategy is taken:

$$\vec{x} = x_0 \hat{\vec{x}} \quad t = t_0 \hat{t} \quad u_0 = \frac{x_0}{t_0} \quad \vec{u} = u_0 \hat{\vec{u}} \quad (6)$$

$$\rho = \rho_0 \hat{\rho} \quad p = p_0 \hat{p} \quad E = E_0 \hat{E} \quad e = e_0 \hat{e} \quad c = c_0 \hat{c} \quad (7)$$

50

$$M^2 = \frac{u_0^2}{c_0^2} \quad c_0^2 = \frac{p_0}{\rho_0} \quad c_0^2 = E_0 = e_0 = \frac{u_0^2}{M^2} \quad (8)$$

After substituting (6) through (8) into (1) through (5), and dropping the “hats,” one has the following dimensionless equations:

$$\rho_t + \nabla \cdot (\rho \vec{u}) = 0 \quad (9)$$

$$(\rho \vec{u})_t + \nabla \cdot (\rho \vec{u} \otimes \vec{u}) + \frac{1}{M^2} \nabla p = 0 \quad (10)$$

$$(\rho E)_t + \nabla \cdot (\rho \vec{u} E + p \vec{u}) = 0 \quad (11)$$

55

$$E = e + M^2 \frac{1}{2} \vec{u} \cdot \vec{u} \quad (12)$$

M is the Mach number and it can be shown that as $M \rightarrow 0$, equations (9) through (12) approach the incompressible flow equations. To be specific, after substituting the following asymptotic ansatz into (9) through (12),

$$\rho = \rho_0 + M^2 \rho_2 + \dots, \quad (13)$$

$$p = p_0 + M^2 p_2 + \dots, \quad (14)$$

$$\vec{u} = \vec{u}_0 + M^2 \vec{u}_2 + \dots, \quad (15)$$

$$E = E_0 + M^2 E_2 + \dots, \quad (16)$$

and then equating like orders of M , the following incompressible flow equations emerge:

$$p_0 = \text{constant} \quad (17)$$

$$(\rho_0)_t + \vec{u}_0 \cdot \nabla \rho_0 = 0 \quad (18)$$

$$\rho_0((\vec{u}_0)_t + \vec{u}_0 \cdot \nabla \vec{u}_0) + \nabla p_2 = 0 \quad (19)$$

$$(e_0)_t + \vec{u}_0 \cdot \nabla e_0 = 0 \quad (20)$$

$$\nabla \cdot \vec{u}_0 = 0 \quad (21)$$

If one assumes the same asymptotic ansatz as in (13) through (16), and also if one assumes “well prepared” initial conditions[6, 28], then it can be shown that the following Cell Integrated Semi-Lagrangian (CISL) algorithm approaches a discretization consistent with the incompressible flow equations in the zero Mach number limit:

CISL

$$\rho_{i_f, j_f}^{n+1} = \frac{\int_{\Omega^D} \rho^n d\vec{x}}{\int_{\Omega^T} 1 d\vec{x}} \quad (22)$$

$$u_{i+1/2, j}^* = \frac{\int_{\Omega^D} \rho^n u^n d\vec{x}}{\int_{\Omega^D} \rho^n d\vec{x}} \quad (23)$$

$$v_{i, j+1/2}^* = \frac{\int_{\Omega^D} \rho^n v^n d\vec{x}}{\int_{\Omega^D} \rho^n d\vec{x}} \quad (24)$$

$$E_{ij}^* = \frac{\int_{\Omega^D} \rho^n E^n d\vec{x}}{\int_{\Omega^D} \rho^n d\vec{x}} \quad (25)$$

Pressure-Velocity

$$\frac{\rho_{i+1/2,j}^{n+1}(u_{i+1/2,j}^{n+1} - u_{i+1/2,j}^*)}{\Delta t} = -\frac{1}{M^2} \frac{p_{i+1,j}^{n+1} - p_{i,j}^{n+1}}{\Delta x} \quad (26)$$

$$\frac{\rho_{i,j+1/2}^{n+1}(v_{i,j+1/2}^{n+1} - v_{i,j+1/2}^*)}{\Delta t} = -\frac{1}{M^2} \frac{p_{i,j+1}^{n+1} - p_{i,j}^{n+1}}{\Delta y} \quad (27)$$

$$\frac{1}{\rho^{n+1} c^2 (\rho^{n+1}, e^*)_{ij}} \frac{(p^{n+1} - p(\rho^{n+1}, e^*))_{ij}}{\Delta t} = -\frac{u_{i+1/2,j}^{n+1} - u_{i-1/2,j}^{n+1}}{\Delta x} - \frac{v_{i,j+1/2}^{n+1} - v_{i,j-1/2}^{n+1}}{\Delta y} \quad (28)$$

Total Energy

$$\frac{\rho_{ij}^{n+1}(E^{n+1} - E^*)_{ij}}{\Delta t} = -\frac{(up)_{i+1/2,j}^{n+1} - (up)_{i-1/2,j}^{n+1}}{\Delta x} - \frac{(vp)_{i,j+1/2}^{n+1} - (vp)_{i,j-1/2}^{n+1}}{\Delta y} \quad (29)$$

Author(s)	incompressible fluids	compressible fluids	multiphase flow	multimaterial flow	shock waves	Coupling Method	Interface Representation	Complex topology
Tran and Udaykumar [32]	No	Yes	No	Yes	Yes	Explicit	Particle Level Set	Yes
Robinson-Mosher et al. [26]	Yes	No	No	No	No	Monolithic	Connected Markers	No
Gretarsson et al. [12]	No	Yes	No	No	Yes	Monolithic	one dimension	No
Banks et al. [3]	Yes	No	No	No	No	Partitioned	Body fitted	No
Patkar et al. [25]	No	Yes	No	No	Yes	Monolithic	Connected Markers	No
Banks et al. [4]	Yes	No	No	No	No	Partitioned	Body fitted	No
Mokbel et al. [23]	Yes	No	No	Yes	No	Monolithic	Hybrid Diffuse and ALE	No
Kloppe and Aland [18]	Yes	No	No	Yes	No	Monolithic	Hybrid Diffuse and ALE	No
Present Article, Estebe et al	Yes	Yes	Yes	Yes	Yes	pressure and velocity	Continuous Moment of Fluid	Yes

Table 1: Recent numerical methods with fluid interaction with deformable structures.

TranUdaykumar Sugiyama ShinCherguiJuric PARK2026132 WILFONG2026110055
(diffuse interface model, not asymptotically preserving, explicit non-partitioned)
80 FERRARI2025113553 (diffuse interface model, not asymptotically preserving,
explicit non-partitioned) GAO2024106124 (not multiphase flow, ALE, explicit
non-partitioned, explicit)

Table captions: 1. coupling: fully coupled, partitioned, non-partitioned and
explicit, pressure-velocity coupling

85 maximum bulk modulus? multiphase flow interaction with elastic materials?
compressible vs incompressible vs both complex topology? interface representation (MOF, CMOF, front tracking, diffuse interface) ? Eulerian/Lagrangian fluids? Eulerian/Lagrangian Elastic materials?

Our method: multiphase flow? yes, both compressible and incompressible
90 (Asymptotically preserving by def. of Degond), complex topology? yes, interface representation CMOF-multimaterial, Eulerian block structured dynamic AMR for all materials (no partitioning). wetting dynamics?

Strongly coupled Fictitious Domain-SPH for fluid-structure interactions: Application to beam elements multiphase flow? yes, incompressible, complex
95 topology? fluids yes, elastics no (FEM), SPH for fluid interfaces, body fitted front tracking for elastic-fluid interface, Lagrangian both fluids and elastics.

Tightly coupled =, velocity and normal stress jump conditions are strictly enforced at the end of each time step. (pros: more accurate cons: requires the inversion of a nonlinear system of equations) The fluid and elastic materials are
100 solved concurrently

Weakly coupled =, The fluid and elastic materials are solved consecutively as in contrast to concurrently; Only one of the velocity or stress jump conditions are enforced at the end of each time step. (pros: very fast; cons: provably unconditionally unstable)

105 “Hybrid coupling” =, the fluid and elastic materials are solved concurrently during a predictor sweep; normal velocity jump condition is strictly enforced. normal stress condition is not strictly enforced. During the corrector sweep, the normal velocity jump condition is preserved, and surface tension effects are included.

110 2 Mathematical Modeling

There are M materials and each material $1 \leq m \leq M$ occupies the region,

$$\Omega_m(t) = \{(\vec{x}, t) | \phi_m(\vec{x}, t) \geq 0\} \quad (30)$$

The $\phi_m(\mathbf{x}, t)$ are level set functions[31, 24]. The zero level set of such functions demarcate the boundary of material m :

$$\partial\Omega_m(t) = \{(\vec{x}, t) | \phi_m(\vec{x}, t) = 0\} \quad (31)$$

115 In the bulk regions of material m we have the following equations for compressible materials:

$$\rho_t + \nabla \cdot (\rho \vec{u}) = 0 \quad (32)$$

$$(\rho \vec{u})_t + \nabla \cdot (\rho \vec{u} \otimes \vec{u} + p \mathbb{I} - \tau) = \vec{F}_{body} \quad (33)$$

$$(\rho E)_t + \nabla \cdot ((\rho E + p) \vec{u} - \vec{u} \cdot \tau - k \nabla T) = \vec{u} \cdot \vec{F}_{body} \quad (34)$$

$$(\rho Y)_t + \nabla \cdot (\rho Y \vec{u}) = \nabla \cdot (\rho D \nabla Y) \quad (35)$$

$$\tau = 2\mu \bar{D} \quad (36)$$

$$\bar{D} = D - \frac{\text{Trace}(D)\mathbb{I}}{\text{Trace}(\mathbb{I})} \quad (37)$$

120

$$D = \frac{\nabla \vec{u} + (\nabla \vec{u})^T}{2} \quad (38)$$

$$\rho E = \rho e_{\text{int}} + \frac{1}{2} \rho |\vec{u}|^2 \quad (39)$$

$$p = p(\rho, e) \quad e = c_v T \quad (40)$$

If the material is a viscoelastic FENE-CR material, then one has the additional equation for the configuration tensor A ,

$$(\rho A)_t + \nabla \cdot (\rho \vec{u} A) = \rho (A \cdot (\nabla \vec{u})^T + \nabla \vec{u} \cdot A - \frac{f(R)}{\lambda} (A - \mathbb{I})), \quad (41)$$

125 and the momentum constitutive law term is modified,

$$\tau = \tau + \frac{\tilde{\eta}_P}{\lambda} f(R) A. \quad (42)$$

If the material is an elastic material undergoing plastic deformation, then one has the following additional equation for the deviatoric stress tensor,

$$(\rho s)_t + \nabla \cdot (\rho \vec{u} s) = \rho (\Omega s - s \Omega + 2G(\bar{D} - D^p)), \quad (43)$$

and the momentum constitutive law term is modified,

$$\tau = \tau + s. \quad (44)$$

130 If the material is an elastic material undergoing plastic deformation, then the plastic strain equation is solved too,

$$\epsilon_t^p + \vec{u} \cdot \nabla \epsilon^p = \sqrt{\frac{2}{3}} |\Lambda|. \quad (45)$$

$$|\Lambda| = \sqrt{\frac{3}{2}} \sqrt{D^p : D^p} \quad (46)$$

$$D^p = \Lambda N \quad N = \sqrt{3/2} \frac{s}{S_e} \quad (\epsilon^p)^2 = \frac{2}{3} \Lambda^2 \quad (47)$$

Ω is the spin tensor,

$$\Omega_{ij} = \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} - \frac{\partial u_j}{\partial x_i} \right) \quad (48)$$

The effective stress is defined as,

$$S_e = \sqrt{\frac{3}{2}} \sqrt{s : s} \quad (49)$$

135 The Johnson-Cook model yield stress is given by,

$$\sigma_y = (A + B(\epsilon^p)^n)(1 + C \ln(\frac{\dot{\epsilon}^p}{\dot{\epsilon}_0}))(1 - \theta^m) \quad \theta = \frac{T - T_0}{T_m - T_0} \quad (50)$$

One form of the Zerilli Armstrong model yield stress is given by,

$$\beta = \beta_0 - \beta_1 \log(\dot{\epsilon}^p / \dot{\epsilon}_{ref}^p) \quad (51)$$

$$\sigma_y = A + B(\epsilon^p)^n e^{-\beta T} \quad (52)$$

The energy contribution due to elasto-plastic deformation is modeled as,

$$\beta \dot{\epsilon}^p S_e, \quad (53)$$

and is added to (34). In order to determine Λ , as it appears in (47), the following
140 “radial return algorithm” is implemented (see [32] for the case when $n = 1$ in (50) or (52)):

1. $\dot{\epsilon}^p = 0, k = 0$
2. $S_e = \sqrt{\frac{3}{2}} \sqrt{s : s}$
3. $\sigma_y = \sigma_y(T, \epsilon^p, \dot{\epsilon}^p)$
- 145 4. if $S_e - \sigma_y \leq 0$ then $\Lambda = 0$ (i.e. $D^p : D^p = 0$).
5. if $S_e > \sigma_y$ then,
6. Solve the following equation for ϵ_{new}^p :

$$S_e - \sigma_y = 3G(\epsilon_{new}^p - \epsilon^p) + B((\epsilon_{new}^p)^n - (\epsilon^p)^n) \quad (54)$$

7.

$$\dot{\epsilon}^p = \frac{\epsilon_{new}^p - \epsilon^p}{\Delta t} \quad (55)$$

8.

$$\Lambda = \sqrt{\frac{3}{2}} \epsilon^p \quad (56)$$

$$D^p = \Lambda N \quad (57)$$

9. $k = k + 1$

150 10. if $k = 1$ then go back to step 3.

The mathematical model at sharp interfaces is given as follows. First, define a “closest point” function:

$$\vec{x}_c(\vec{x}) = \operatorname{argmin}_{\vec{y}, m} \{ ||\vec{y} - \vec{x}|| | \phi_m(\vec{y}) = 0 \} \quad (58)$$

Taking into account mass transfer, a source material’s level set function (e.g. ice that is melting or liquid that is turning into vapor) satisfies

$$(\phi_{m_s})_t + \vec{u}_{m_s}(\vec{x}_c(\vec{x})) \cdot \nabla \phi_{m_s} = - \frac{|\dot{m}(\vec{x}_c(\vec{x}))|}{\rho_{m_s}} |\nabla \phi_{m_s}| \quad (59)$$

155 The destination material’s level set function satisfies

$$(\phi_{m_d})_t + \vec{u}_{m_s}(\vec{x}_c(\vec{x})) \cdot \nabla \phi_{m_d} = \frac{|\dot{m}(\vec{x}_c(\vec{x}))|}{\rho_{m_s}} |\nabla \phi_{m_d}| \quad (60)$$

The above equations are equivalent to the following:

$$(\phi_{m_s})_t + \vec{u}_{m_d}(\vec{x}_c(\vec{x})) \cdot \nabla \phi_{m_s} = - \frac{|\dot{m}(\vec{x}_c(\vec{x}))|}{\rho_{m_d}} |\nabla \phi_{m_s}| \quad (61)$$

$$(\phi_{m_d})_t + \vec{u}_{m_d}(\vec{x}_c(\vec{x})) \cdot \nabla \phi_{m_d} = \frac{|\dot{m}(\vec{x}_c(\vec{x}))|}{\rho_{m_d}} |\nabla \phi_{m_d}| \quad (62)$$

Now, we define the interface normal:

$$\vec{n}_m = \frac{\nabla \phi_m}{||\nabla \phi_m||} \quad (63)$$

The interface curvature is,

$$\kappa_m = \nabla \cdot \vec{n}_m \quad (64)$$

160 The rate of mass transfer is,

$$\dot{m} = \frac{k_{m_s} \nabla T_{m_s} - k_{m_d} \nabla T_{m_d}}{L} \cdot \vec{n}_{m_d}. \quad (65)$$

The phase change interface temperature condition is,

$$T_{m_s} = T_{m_d} = T_{\text{saturation}}(P_{\text{equilibrium}}) \quad (66)$$

For evaporation, the following rate of mass transfer should match that in (65):

$$\dot{m} = \frac{-\vec{n}_{m_s} \cdot \nabla Y_{m_d} \rho_{m_d} D}{Y^\Gamma - 1} \quad (67)$$

Let the tensor σ represent pressure, viscosity, viscoelastic, and elastic contributions to the momentum equations. One has:

$$\sigma = -p\mathbb{I} + \tau. \quad (68)$$

165 The stress jump conditions are

$$\vec{n}_{m_s} \cdot (-\sigma_{m_s} + \sigma_{m_d}) \cdot \vec{n}_{m_s} = -\gamma_{m_s, m_d} \kappa_{m_s} - \dot{m}^2 \left(\frac{1}{\rho_{m_s}} - \frac{1}{\rho_{m_d}} \right) \quad (69)$$

$$(\vec{t}_{i, \text{tangent}})_{m_s} \cdot (-\sigma_{m_s} + \sigma_{m_d}) \cdot \vec{n}_{m_s} = 0 \quad i = 1, 2 \quad (70)$$

The velocity jump conditions are

$$(\vec{u}_{m_s} - \vec{u}_{m_d}) \cdot \vec{n}_{m_s} = \dot{m} \left(\frac{1}{\rho_{m_d}} - \frac{1}{\rho_{m_s}} \right) \quad (71)$$

3 Positioning of discrete variables on the computational grid

170 Note: for conservation form, velocity on face centroids, off-diagonal configuration tensor variables on edge centroids, the density is stored on a refined mesh.
Remarks:

1. The positioning of discrete variables in our earlier work [16] were collocated instead of staggered thereby susceptible to “checkerboard” instability [13, 20].
175
2. In our earlier work [16], density, temperature, volume fraction, and centroid were discretized for each material, separately. The velocity in this previous work was a single variable that represented the mass weighted average of each materials’ velocity. In the present work, density, volume fraction, and centroid are discretized for each material separately. The velocity is still a mass weighted average of each materials’ velocity. The temperature is also a mass weighted average of each materials’ temperature. The rationale for having the temperature as a mass weighted average is that we observed temperature overheating or undercooling in computational cells with “small” volume fraction.
180
185

4 temporal discretization

0. Initially the fluid (Newtonian and/or Non-Newtonian) volume fractions tessellate the whole computational domain and the elastic materials (in which we distinguish from Non-Newtonian fluids in which the characteristic wave speed $\sqrt{\eta_P/\rho}$ (see (42)) or $\sqrt{G/\rho}$ (see (43)) has the same order of magnitude, or larger, as the sound speed of the material) tessellate the “elastic material domain.” See figure ?? . For stability purposes, the velocity is discretized at face centroids and the configuration tensor off-diagonals are discretized at edge centers[30, 13, 20] (see Figure ??).

1. for $k = 0, 1$
2. cell integrated semi-Lagrangian advection using $\vec{u}^{(k)}$. See section ??.
3. extrapolate $\vec{u}^{(k)}$ from the elastic regions into the fluid regions: $\vec{u}^{extrap}$
4. advect the elastic material volume fractions and centroids using $\vec{u}^{extrap}$.
5. If phase change is modeled, see section ??
6. Jaumann derivative equation or upper convective derivative. See section ??.
7. for $r = 0, 1$
8. Viscosity; elastic materials clamped if $r = 1$. See section ??.

$$\frac{\vec{u}^{*,k,r} - \vec{u}^{CISL,k}}{\Delta t} = F_{viscosity}(\vec{u}^{*,k,r}) \quad (72)$$

9. Thermal diffusion and species diffusion. See section ??.

$$\frac{\vec{T}^{*,k,r} - \vec{T}^{CISL,k}}{\Delta t} = F_{heat}(T^{*,k,r}) \quad (73)$$

10. Elastic forces ($r = 0$); see section ??.

$$\frac{\vec{u}^{**,k} - \vec{u}^{*,k,r}}{\Delta t} = F_{elastic} \quad (74)$$

11. surface tension forces ($r = 1$); see section ??.

$$\frac{\vec{u}^{**,k} - \vec{u}^{*,k,r}}{\Delta t} = F_{elastic} \quad (75)$$

12. Pressure gradient; elastic materials clamped if $r = 1$. See section ??:

$$\vec{u}^{**,k} = \vec{u}^{(k+1)} + \Delta t \frac{\nabla p^{(k+1)}}{\rho} \quad (76)$$

$$\frac{p^{(k+1)} - p(\rho, e)}{\Delta t} = -\Delta t \rho c^2 \nabla \cdot \vec{u}^{(k+1)} \quad (77)$$

12. end for $r = 0, 1$

13. end for $k = 0, 1$

210 Remarks:

- ▷ steps 3 and 4 above are necessary to allow slip between fluid and elastic materials without unphysically modifying the elastic boundary. See sections ?? and ?? which demonstrate the effectiveness of this algorithm.
- ▷ steps 3 and 4 can induce a violation of mass, momentum, and energy conservation for the non-elastic materials at the elastic fluid boundaries, but we have found the error to be minimal and converge to zero with grid refinement (see sections ?? and ??).
- ▷ similar ideas, as steps 3 and 4, were implemented in [41].
- ▷ the outer for loop, $k = 0, 1$, was implemented in [16]. THIS OUTER LOOP MIGHT BE OPTIONAL SINCE (A) VELOCITY ON MAC GRID AND (B) A SINGLE VARIABLE IS USED FOR ENERGY IN CONTRAST TO A SEPARATE ENERGY VARIABLE FOR EACH MATERIAL.
- ▷ the inner loop, $r = 0, 1$, was recommended in the article by [29].
- ▷ The effect of surface tension forces on the motion of elastic materials is not considered; so surface tension is not included when $r = 0$.
- ▷ The pressure and velocity is tightly coupled between all materials; regardless of elastic, fluid, or rigid. See step 11 above in our algorithm also see [30, 29]. Thereby we our method avoids the stability problems discussed in [4] and [3].
- ▷ In contrast to [16], which is a collocated method, our method is a staggered grid (conservative) method. In a collocated method, for incompressible flow, it is possible for the discretized projection step, even for constant density case,

$$U = (I - \text{grad}(\text{divgrad})^{-1} \text{div})V \quad (78)$$

235 to be non-unique[13, 20]. Also in contrast to [16], our method preserves overall conservation (of non elastic fluids) of energy in contrast to preserving conservation of energy overall and for each individual material. This simplification was necessary in order to avoid temperature overheating at material boundaries with volume fractions close to zero or one.

240 5 phase change algorithm

See the following articles and below: [34], [33], [39].

1. For each cell in a narrow band about the interface, use the closest point map to find the corresponding closest point on the interface. Approximate the phase change speed, $|\dot{m}|/\rho$ at the closest point.
- 245 2. extend the phase change speed $|\dot{m}|/\rho$ further into bulk regions.
3. If distributing the mass source term due to expansion or compression, $\dot{m}$, to the destination material side, then the velocity on the interface corresponds to the source material velocity and the overall interface velocity is:

$$\vec{u}_{source} + \frac{|\dot{m}|}{\rho_s} \vec{n}_s \quad (79)$$

250 If distributing $\dot{m}$ to the source material side, then the velocity on the interface corresponds to the destination material velocity and the interface velocity is:

$$\vec{u}_{dest} + \frac{|\dot{m}|}{\rho_d} \vec{n}_s \quad (80)$$

4. Using step 3 as a guide, do unsplit CISEL phase change advection. If distributing $\dot{m}$ to the destination material side, the phase change contribution to the interface velocity is
- 255

$$\frac{|\dot{m}|}{\rho_s} \vec{n}_s \quad (81)$$

5. The difference in volume fraction from step 4 gives the $\dot{m}^{conservative}$ expansion source term to be applied during the pressure update step.
6. The $\dot{m}^{conservative}$ terms are distributed to one side of the interface. If distributed to the destination material side, then distribute where $F_{dest} > 1/2$. This guarantees, for linear interfaces, that all faces with at least one adjoining source material majority cell will have the source material velocity defined at that face. Please refer to Figure 1.
- 260

For compressible flow, with a predictor and a corrector step, there is a problem. For the evaporating droplet problem, the $\dot{m}$ terms are distributed to the vapor (destination). Please refer to Figure 1. If the $\dot{m}$ terms are not distributed deep enough into the bulk of the destination material, then:

265

1. During the predictor step, there is no problem because the advection velocity at time t^n is used in order to advect the interface that is initially defined at $t = t^n$ (Γ^n).

- 270 **2.** During the corrector step, there is a problem because the advection velocity at time t^{n+1} is used in order to advect the interface that is initially defined at $t = t^n$ (Γ^n). The problem is that some of the $\dot{m}$ terms distributed to the vapor side of the Γ^{n+1} interface will be on the liquid side of the $t = t^n$ (Γ^n) interface. See the blue region of Figure 1.

275 **6 Applications**

1. Jet in cross flow problem (military jet engines, Pratt and Whitney)
2. Diesel injectors
3. Rotating Detonation Engines (see latest article with Everett Wenzel and Marco Arienti).

280 **7 Algorithm**

1. Cell integrated semi Lagrangian advection
2. Cell integrated semi Lagrangian advection due to phase change.
3. Viscosity, Viscoelastic, and elastic forces.
4. Temperature Diffusion
- 285 5. Mass Fraction Diffusion
6. Pressure Gradient
7. Go back to step 1.

References

- 290 [1] ALMGREN, A. S., BELL, J. B., RENDLEMAN, C. A., AND ZINGALE, M. Low mach number modeling of type ia supernovae. i. hydrodynamics. *The Astrophysical Journal* 637, 2 (2006), 922–936.
- [2] AN, M., LIU, M., MA, Y., AND XU, X. Multi-scale vibration behavior of a graphite tube with an internal vapor–liquid–solid boiling flow. *Powder Technology* 291 (2016), 201–213.
- 295 [3] BANKS, J. W., HENSHAW, W. D., AND SCHWENDEMAN, D. W. An analysis of a new stable partitioned algorithm for fsi problems. part i: Incompressible flow and elastic solids. *Journal of Computational Physics* 269 (2014), 108–137.

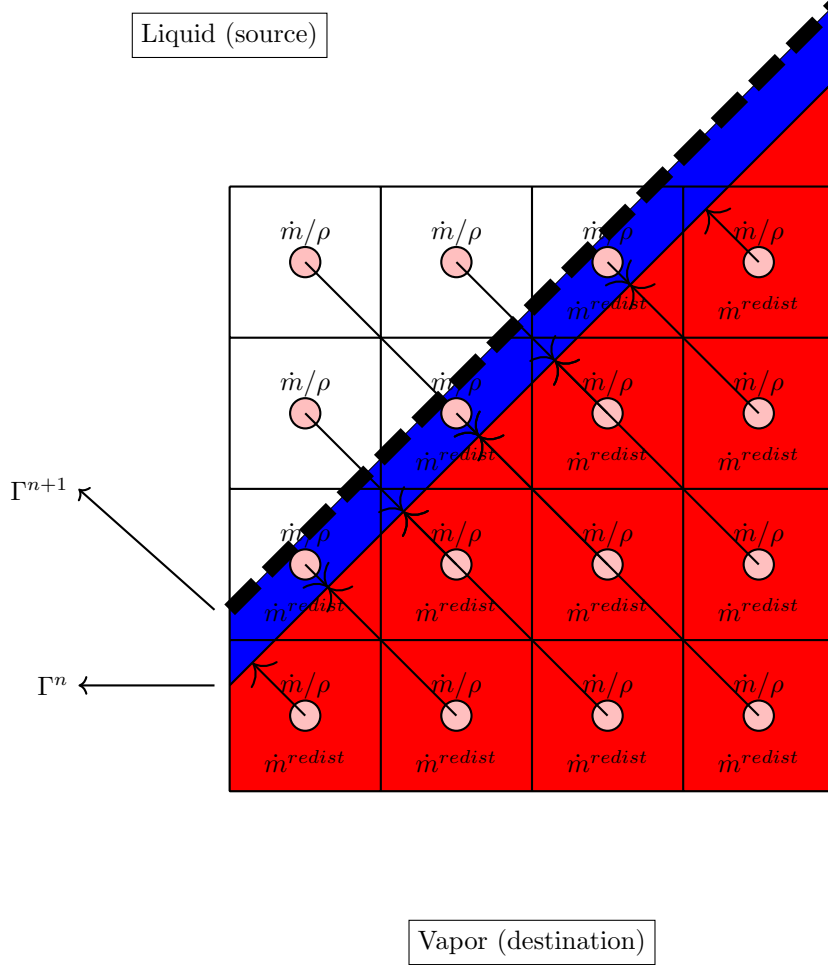


Figure 1: The phase change algorithm: (1) the phase change speed, $\dot{m}/\rho$, is approximated at all narrow band cells by evaluating $\dot{m}/\rho$ at the corresponding closest point on the interface (Γ^n). (2) The change in volume fraction due to unsplit CISL advection determines the mass source, $\dot{m}$, for the projection step. (3) the mass source, $\dot{m}$ is distributed to the vapor side of the Γ^{n+1} interface. At the next time step, the interface is advected using $\vec{u}^{source}$. For compressible flow, there is a problem if $\dot{m}$ is not distributed deep enough into the vapor material. This is because the corrector advection of Γ^n will now have some redistributed $\dot{m}$ terms on the liquid side of the Γ_n interface (the blue region).

- [4] BANKS, J. W., HENSHAW, W. D., SCHWENDEMAN, D. W., AND TANG, Q. A stable partitioned fsi algorithm for rigid bodies and incompressible flow in three dimensions. *Journal of Computational Physics* 373 (2018), 455–492.
- [5] BIBAL, M., DEFERREZ, M., TANGUY, S., AND URBANO, A. A compressible solver for two phase-flows with phase change for bubble cavitation. *Journal of Computational Physics* 500 (2024), 112750.
- [6] BOSCARINO, S., RUSSO, G., AND SCANDURRA, L. All mach number second order semi-implicit scheme for the euler equations of gas dynamics. *Journal of Scientific Computing* 77, 2 (2018), 850–884.
- [7] CHEN, H., ZHANG, A.-M., MING, F.-R., SUN, S.-L., AND PENG, Y.-X. Numerical simulation of the entire fluid-structure interaction process of ship structures subjected to underwater explosion. *Science China Physics, Mechanics & Astronomy* 69, 5 (2026), 254512.
- [8] CHOI, Y.-R., YEO, D., LEE, J.-C., CHO, J.-W., AND MOON, S. A novel ultrasonic leak detection system in nuclear power plants using rigid guide tubes with fcog and snr. *Sensors* 24, 20 (2024), 6524.
- [9] CUI, X.-Y., XUE, H., HAN, H.-Y., WANG, T., AND HUANG, G.-Y. Oblique penetration of spherical tungsten alloy projectiles on high-strength steel plates. *International Journal of Impact Engineering* 192 (2024), 105030.
- [10] DRESSAIRE, E., SAURET, A., BOULOGNE, F., AND STONE, H. A. Drop impact on a flexible fiber. *Soft matter* 12, 1 (2015), 200–208.
- [11] GAO, Y.-Q., ZHONG, Q., LIU, Y.-L., LI, S., ZHANG, J.-F., AND ZHANG, A. Study on the dynamics of underwater explosion bubbles near elastic-plastic cylindrical shells. *Physics of Fluids* 37, 10 (2025).
- [12] GRÉTARSSON, J. T., KWATRA, N., AND FEDKIW, R. Numerically stable fluid–structure interactions between compressible flow and solid structures. *Journal of Computational Physics* 230, 8 (2011), 3062–3084.
- [13] GUITTET, A., THEILLARD, M., AND GIBOU, F. A stable projection method for the incompressible navier–stokes equations on arbitrary geometries and adaptive quad/octrees. *Journal of Computational Physics* 292 (2015), 215–238.
- [14] HE, M., YAN, J., LV, P., DUAN, H., AND ZHANG, A.-M. Research on ice-breaking characteristics of underwater explosion bubbles based on an effective coupled model. *Applied Ocean Research* 153 (2024), 104259.
- [15] JEMISON, M., LOCH, E., SUSSMAN, M., SHASHKOV, M., ARIENTI, M., OHTA, M., AND WANG, Y. A coupled level set-moment of fluid method for incompressible two-phase flows. *Journal of Scientific Computing* 54, 2-3 (2013), 454–491.

- [16] JEMISON, M., SUSSMAN, M., AND ARIENTI, M. Compressible, multi-
 340 phase semi-implicit method with moment of fluid interface representation. *Journal of Computational Physics* 279 (2014), 182–217.
- [17] JEMISON, M., SUSSMAN, M., AND SHASHKOV, M. Filament capturing
 with the multimaterial moment-of-fluid method. *Journal of Computational
 Physics* 285 (2015), 149–172.
- [18] KLOPPE, M., AND ALAND, S. A phase-field model of elastic and vis-
 345 coelastic surfaces in fluids. *Computer Methods in Applied Mechanics and
 Engineering* 428 (2024), 117090.
- [19] KWATRA, N., SU, J., GRÉTARSSON, J. T., AND FEDKIW, R. A method
 for avoiding the acoustic time step restriction in compressible flow. *Journal
 350 of Computational Physics* 228, 11 (2009), 4146–4161.
- [20] LE CHENADEC, V., AND PITSCH, H. A monotonicity preserving conser-
 vative sharp interface flow solver for high density ratio two-phase flows.
Journal of Computational Physics 249 (2013), 185–203.
- [21] LEGER, M., MATOS, H., SHUKLA, A., AND JAVIER, C. Experimental
 355 evaluation of curved aluminum structures subjected to underwater explo-
 sions. *Experimental Mechanics* 63, 5 (2023), 925–937.
- [22] MENG, Z.-F., ZHANG, A.-M., YAN, J.-L., WANG, P.-P., AND KHAYYER,
 A. A hydroelastic fluid–structure interaction solver based on the riemann-
 sph method. *Computer Methods in Applied Mechanics and Engineering*
 360 390 (2022), 114522.
- [23] MOKBEL, M., MOKBEL, D., LIESE, S., WEBER, C., AND ALAND, S.
 A simulation method for the wetting dynamics of liquid droplets on de-
 formable membranes. *SIAM Journal on Scientific Computing* 46, 6 (2024),
 B806–B829.
- [24] OSHER, S., AND SETHIAN, J. A. Fronts propagating with curvature-
 365 dependent speed: algorithms based on hamilton-jacobi formulations. *Jour-
 nal of computational physics* 79, 1 (1988), 12–49.
- [25] PATKAR, S., AANJANEYA, M., LU, W., LENTINE, M., AND FEDKIW, R.
 Towards positivity preservation for monolithic two-way solid–fluid coupling.
 370 *Journal of Computational Physics* 312 (2016), 82–114.
- [26] ROBINSON-MOSHER, A., SCHROEDER, C., AND FEDKIW, R. A symmet-
 ric positive definite formulation for monolithic fluid structure interaction.
Journal of Computational Physics 230, 4 (2011), 1547–1566.
- [27] SANDUSKY, H., CHAMBERS, P., ZERILLI, F., FABINI, L., AND
 375 GOTTWALD, W. Dynamic measurements of plastic deformation in a water-
 filled aluminum tube in response to detonation of a small explosives charge.
Shock and Vibration 6, 3 (1999), 125–132.

- [28] SCANDURRA, L. Numerical methods for all mach number flows for gas dynamics.
- 380 [29] SHIN, S., CHERGUI, J., AND JURIC, D. Interaction of a deformable solid with two-phase flows: An eulerian-based numerical model for fluid-structure interaction using the level contour reconstruction method. *International Journal for Numerical Methods in Fluids* 92, 11 (2020), 1478–1505.
- 385 [30] SUGIYAMA, K., II, S., TAKEUCHI, S., TAKAGI, S., AND MATSUMOTO, Y. A full eulerian finite difference approach for solving fluid–structure coupling problems. *Journal of Computational Physics* 230, 3 (2011), 596–627.
- [31] SUSSMAN, M., SMEREKA, P., AND OSHER, S. A level set approach for computing solutions to incompressible two-phase flow. *Journal of Computational physics* 114, 1 (1994), 146–159.
- 390 [32] TRAN, L., AND UDAYKUMAR, H. A particle-level set-based sharp interface cartesian grid method for impact, penetration, and void collapse. *Journal of Computational Physics* 193, 2 (2004), 469–510.
- [33] VAHAB, M., PEI, C., HUSSAINI, M. Y., SUSSMAN, M., AND LIAN, Y. An adaptive coupled level set and moment-of-fluid method for simulating droplet impact and solidification on solid surfaces with application to aircraft icing. In *54th AIAA Aerospace Sciences Meeting* (2016), p. 1340.
- 395 [34] VAHAB, M., SUSSMAN, M., AND SHOELE, K. Fluid-structure interaction of thin flexible bodies in multi-material multi-phase systems. *Journal of Computational Physics* 429 (2021), 110008.
- 400 [35] WANG, K. G. Multiphase fluid-solid coupled analysis of shock-bubble-stone interaction in shockwave lithotripsy. *International journal for numerical methods in biomedical engineering* 33, 10 (2017), e2855.
- [36] WARDLAW JR, A. B., AND LUTON, J. A. Fluid-structure interaction mechanisms for close-in explosions. *Shock and Vibration* 7, 5 (2000), 265–275.
- 405 [37] XIONG, Q., LIU, L., ZHU, X., LI, Y., WANG, T., AND DONG, X. Bubble dynamics and heat transfer characteristics during boiling of water droplets on flexible pdms substrates. *International Journal of Heat and Mass Transfer* 259 (2026), 128364.
- 410 [38] XU, W., ZHAI, Y., LUO, J., ZHANG, Q., AND LI, J. Experimental study of the influence of flexible boundaries with different elastic moduli on cavitation bubbles. *Experimental Thermal and Fluid Science* 109 (2019), 109897.
- 415 [39] YE, Z., ESTEBE, C., LIU, Y., VAHAB, M., HUANG, Z., SUSSMAN, M., MORADIKAZEROUNI, A., SHOELE, K., LIAN, Y., OHTA, M., ET AL. An

improved coupled level set and continuous moment-of-fluid method for simulating multiphase flows with phase change. *Communications on Applied Mathematics and Computation* 6, 2 (2024), 1034–1069.

- 420 [40] YIN, C., LIU, J., AND JIN, Z. Experimental and numerical study of the near-field underwater explosion of a circular plate coated by rigid polyurethane foam. *Ocean Engineering* 252 (2022), 111248.
- [41] ZHI-WEI, R, E. A. A sharp interface method for incompressible two-phase flows. *Journal of computational physics* 221, 2 (2007), 469–505.