

By: Matt Staniszewski

USB-C Input



Reuse ID protection for CC1.
CC2 requires additional diode.

USB 2.0 without PD, 500mA Current

Programming Connector

Use with Tag Connect TC2030-IDC-NL
and ARM20-CTX adapters




Battery Voltage Monitor

USB/TTL Bridge




Blue Illumination


Reset Button



DFU/Debug/IO Header

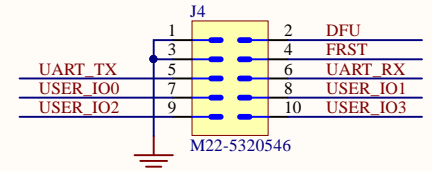

User LEDs

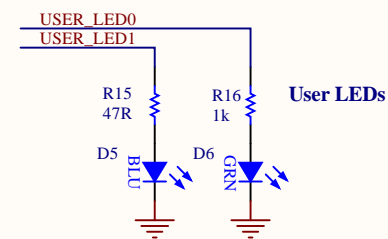

Title Bluetooth Sorry v1		
Size Orcad B	Number BS-V1	Revision 1.0.3
Date: 4/5/2019	Sheet 1 of 1	File: C:\git\msx\bs\PCB\p1_bt_sorry.SchDoc
		Drawn By: Matt Staniszewski