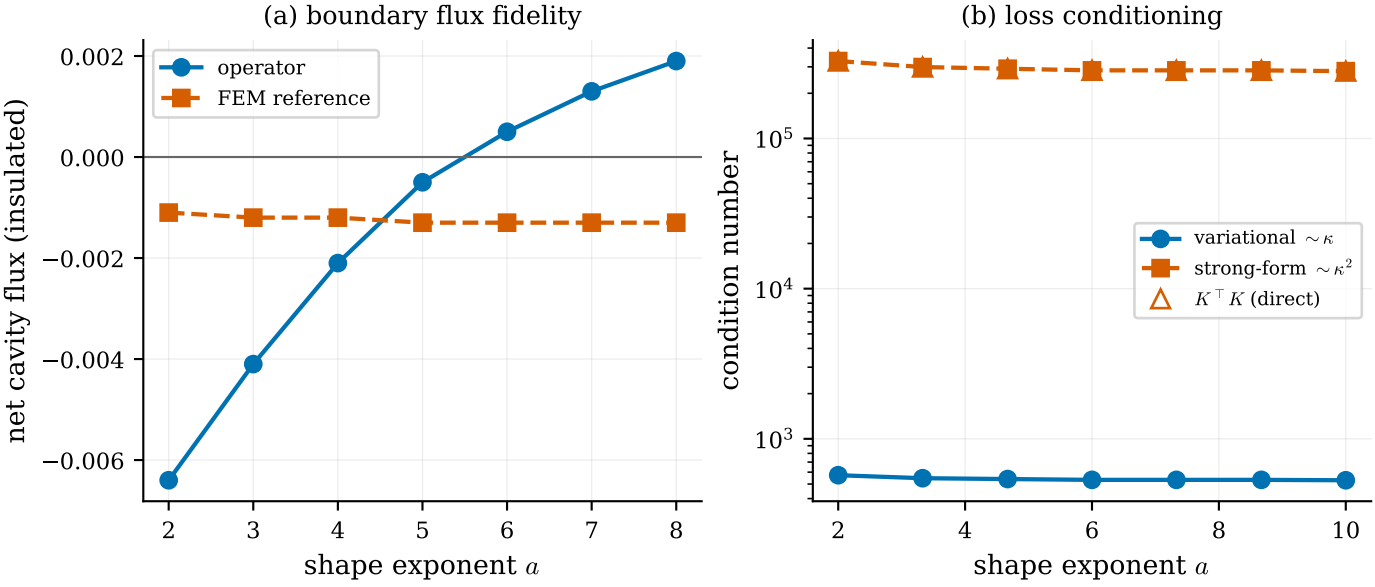
(a) boundary flux fidelity
operator
FEM reference
net cavity flux (insulated)
0.002
0.000
−0.002
−0.004
−0.006
2
3
4
5
6
7
8
shape exponent a
(b) loss conditioning
condition number
10^5
10^4
10^3
variational $\sim\kappa$
strong-form $\sim\kappa^2$
$K^\top K$ (direct)
2
4
6
8
10
shape exponent a