Mobil™

Alert

Unit ID: **11-BM-1 lube pump** Asset ID: **50074736**

Description: **Fine Grinding Bradley Mill**

Account Information

ID: **402009**

Name: **Greer Lime**

Address: **1088 Germany Valley Limestone Road, Riverton, WV 26814-0000 US**

Parent Account: **MATTHEWS LUBRICANTS, INC.**

Sample Information

Sample ID: **25308280036**

Service Level: **Essential**

Bottle ID: **a037067147**

Tested Lubricant: **MOBIL VACUOLINE 537**

Equipment Information

Asset Class: **Circulating System**

Manufacturer: **Bradley**

Model: **Hercules Mill 6000**

Lubricant: **MOBIL VACUOLINE 537**

Sample Data & Trends

Sample Info	Report Status	Alert	Alert	Alert	Alert	Alert
	Sample ID	24094280058	24312210016	24330183019	25069424011	25308280036
	Service Level	Essential	Essential	Essential	Essential	Essential
	Bottle ID	a029567932	a033582739	a033554806	a003623421	a037067147
	Tested Lubricant	MOBIL VACUOLINE 537	MOBIL VACUOLINE 537	MOBIL VACUOLINE 537	MOBIL VACUOLINE 537	MOBIL VACUOLINE 537
	Sampled	06 Mar 2024	25 Oct 2024	13 Nov 2024	04 Mar 2025	28 Oct 2025
	Reported	09 Apr 2024	11 Nov 2024	27 Nov 2024	12 Mar 2025	06 Nov 2025
	Equipment Age					
	Oil Age					
	Make-up Volume					
	Oil Changed					
	Filter Changed					
Lubricant	Contamination Rating	Normal	Normal	Normal	Alert	Alert
	Equipment Rating	Alert	Alert	Alert	Alert	Alert
	Lubricant Rating	Normal	Normal	Normal	Normal	Normal
	Visc@40C (cSt)	316.1	337.7	314.4	325.8	352.5
	Oxidation (Abs/cm) D7414	4	5	4	5	6
	Water (Hot Plate)	NotDetected	NotDetected	NotDetected	NotDetected	NotDetected
Wear (ppm)	Ag (Silver)	0	0	0	0	0
	Al (Aluminum)	1	1	2	2	1
	Cr (Chromium)	3	4	2	3	2
	Cu (Copper)	14	6	14	11	6
	Fe (Iron)	671	1011	230	404	428
	Mo (Molybdenum)	7	10	2	2	2
	Ni (Nickel)	2	1	4	3	3
	Pb (Lead)	0	0	1	1	1
	Sn (Tin)	0	0	0	1	1
Contaminant (ppm)	K (Potassium)	1	1	1	0	1
	Na (Sodium)	0	1	0	0	3
	Si (Silicon)	4	6	11	21	26
Additive (ppm)	B (Boron)	13	10	16	22	23
	Ba (Barium)	0	0	1	0	0
	Ca (Calcium)	38	44	92	142	81
	Mg (Magnesium)	0	0	4	4	1
	P (Phosphorus)	336	232	294	308	307
	Zn (Zinc)	141	75	20	33	42

Viscosity

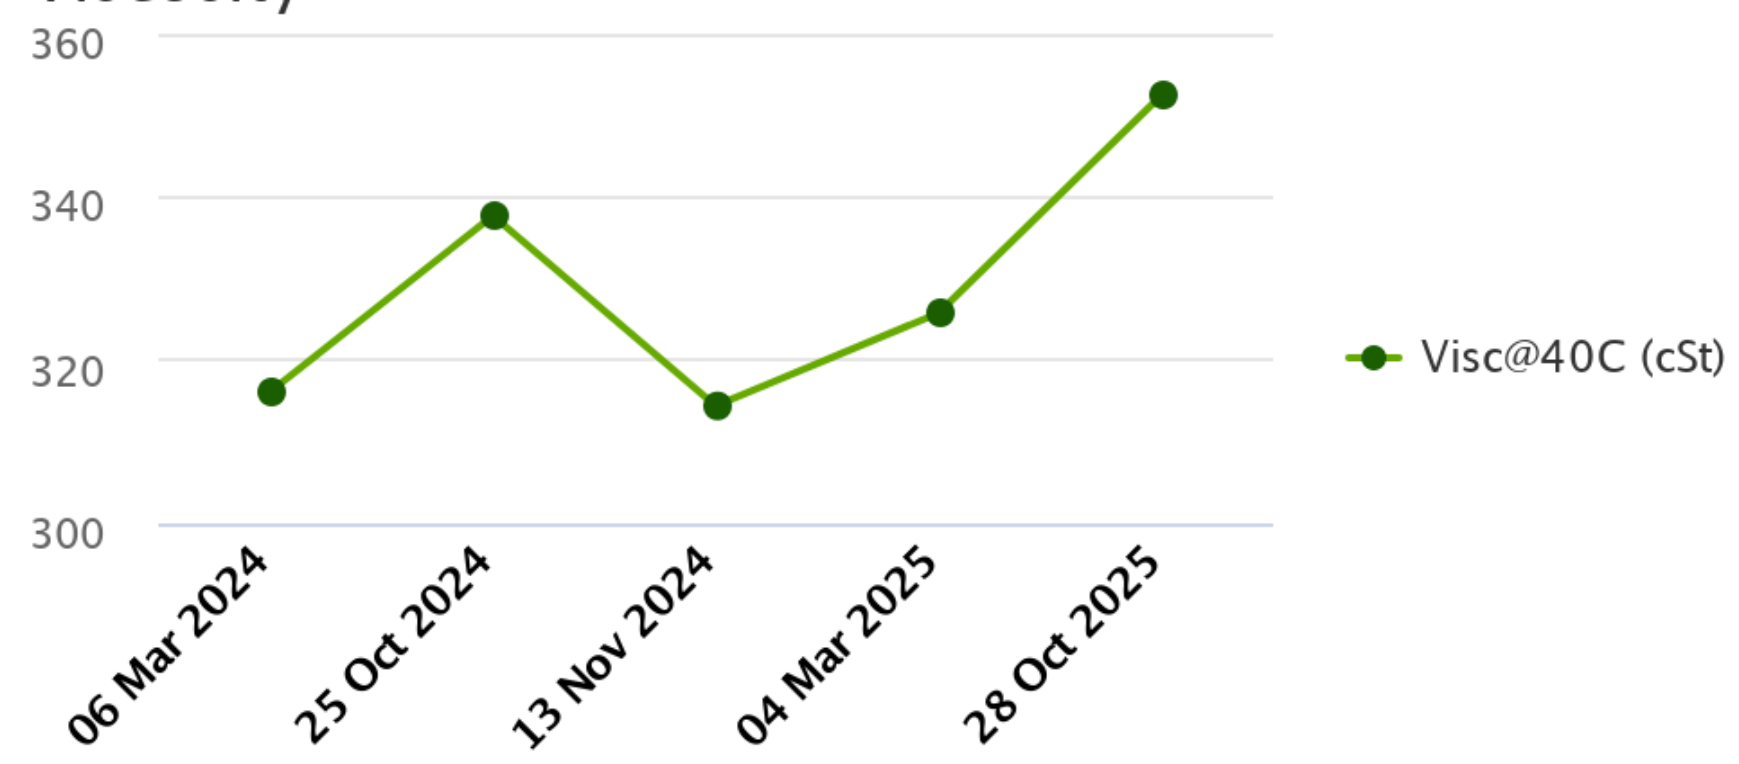

Wear

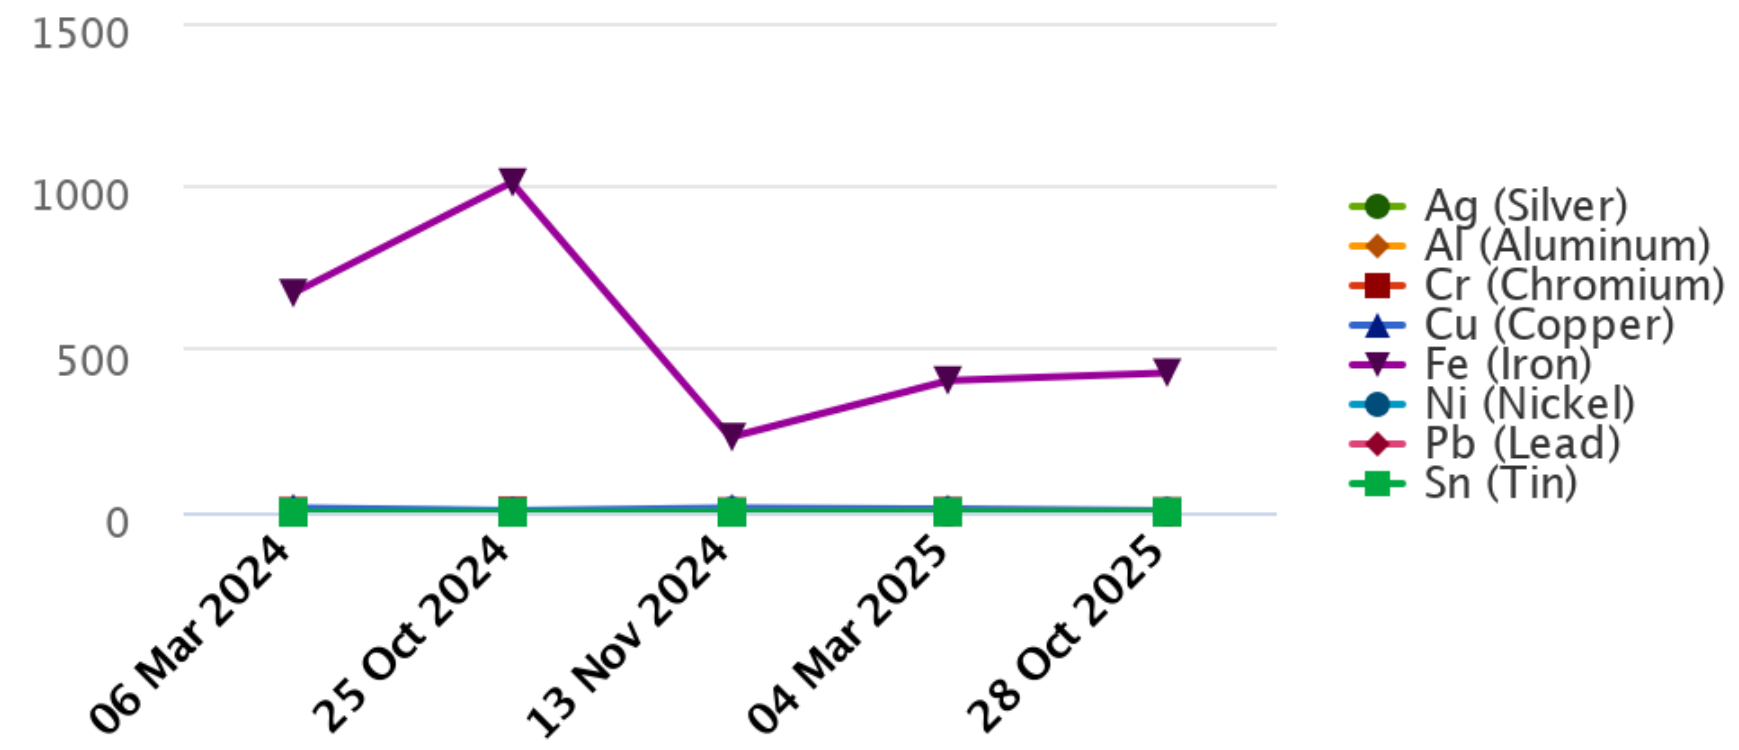

Contaminants

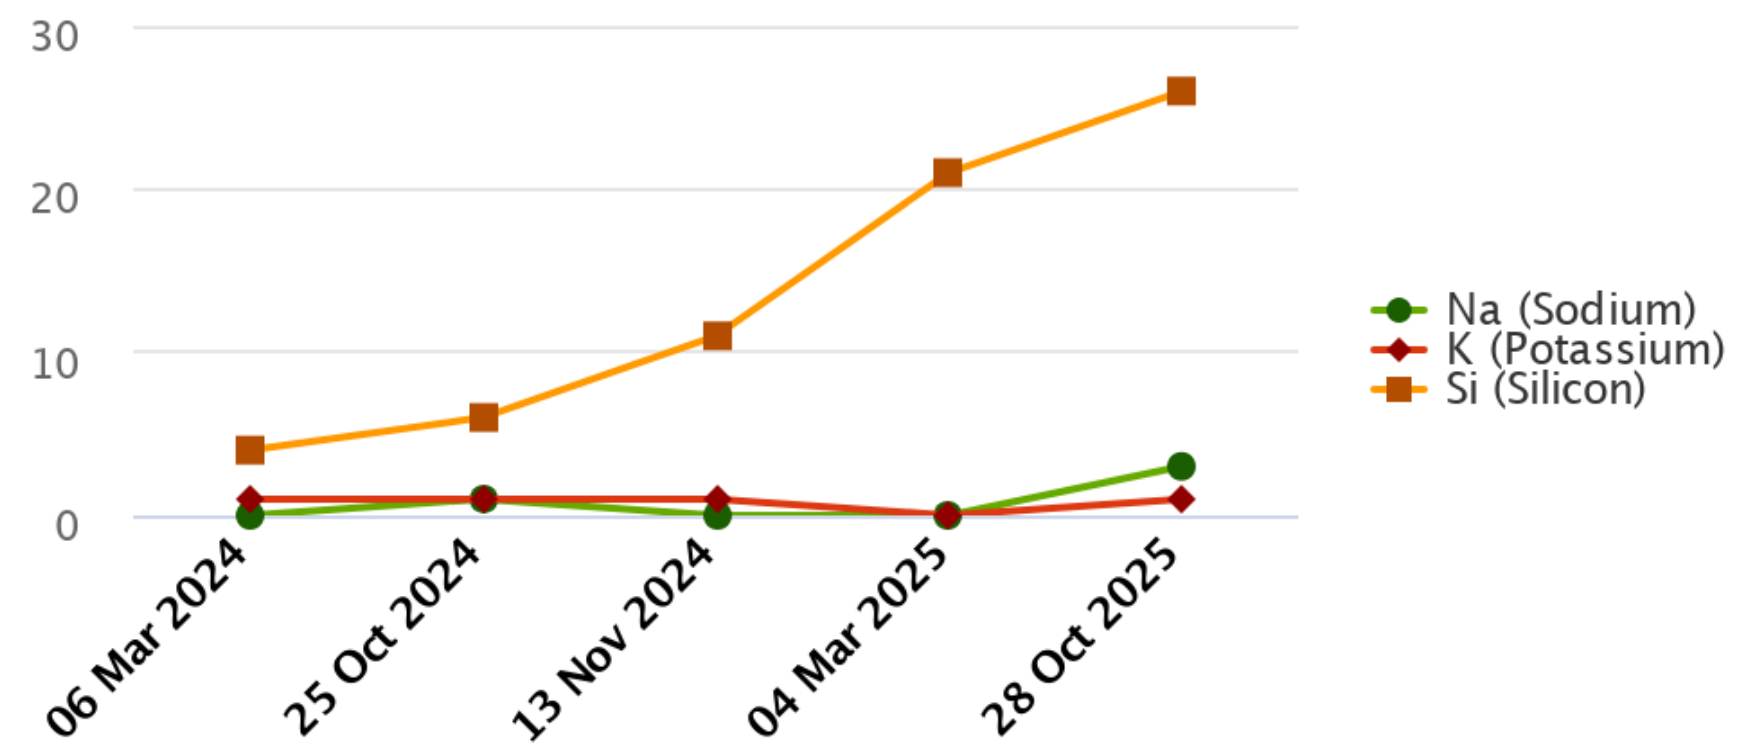

Physical Properties

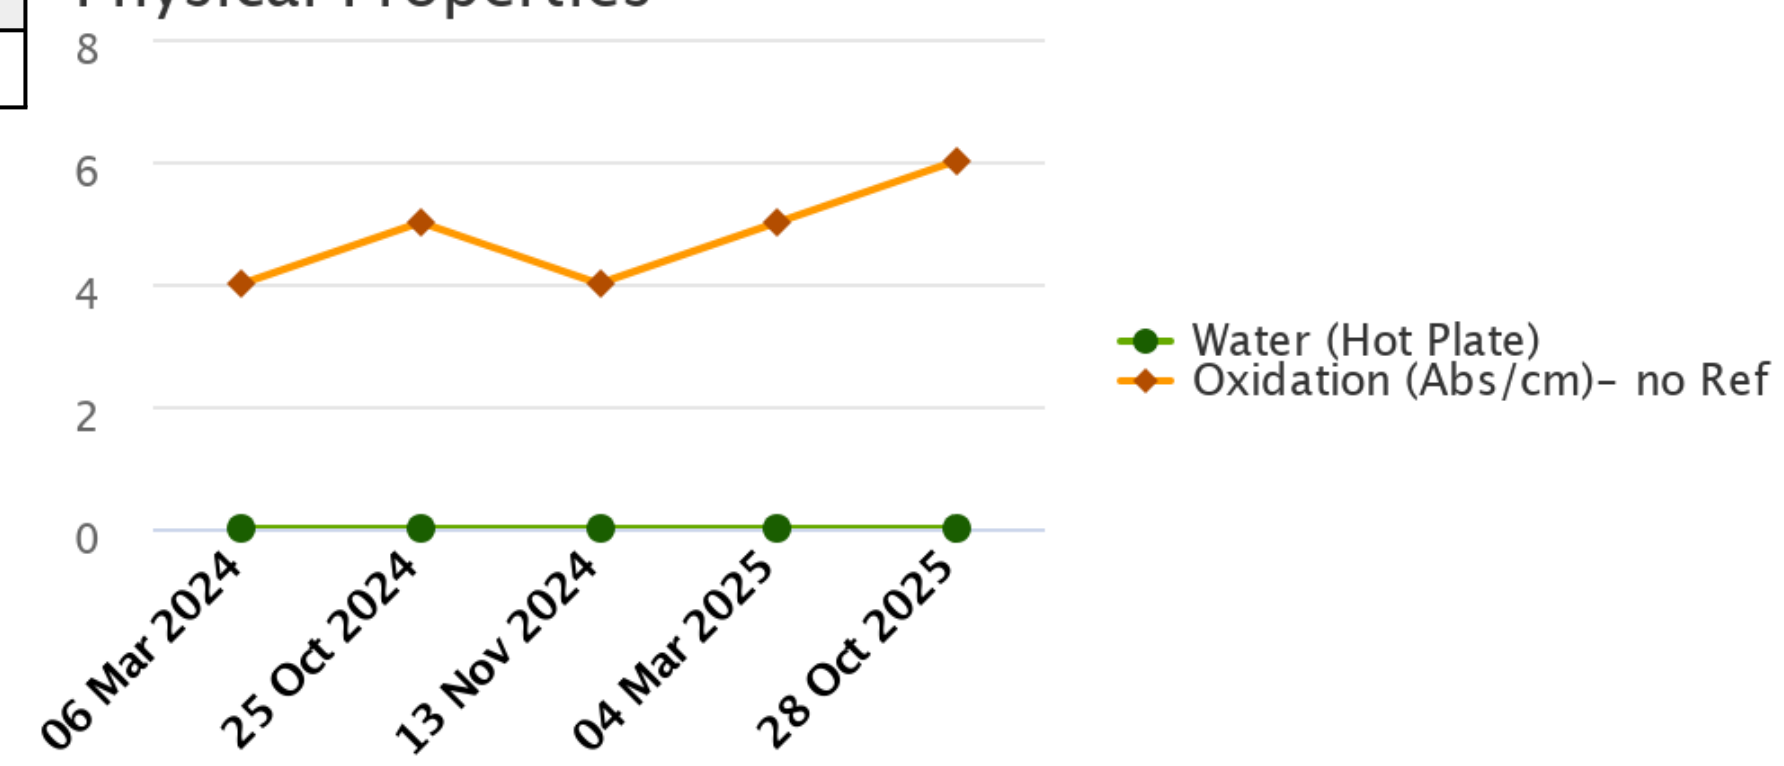

Alert

Unit ID: **11-BM-1 lube pump** Asset ID: **50074736**

Description: **Fine Grinding Bradley Mill**

Account Information	Sample Information	Equipment Information
ID: **402009**	Sample ID: **25308280036**	Asset Class: **Circulating System**
Name: **Greer Lime**	Service Level: **Essential**	Manufacturer: **Bradley**
Address: **1088 Germany Valley Limestone Road, Riverton, WV 26814-0000 US**	Bottle ID: **a037067147**	Model: **Hercules Mill 6000**
Parent Account: **MATTHEWS LUBRICANTS, INC.**	Tested Lubricant: **MOBIL VACUOLINE 537**	Lubricant: **MOBIL VACUOLINE 537**

Continued

Recommendation/Comments

ACTION REQUIRED - EXCESSIVE IRON LEVEL. Determine source of Iron (Fe) and take corrective action. If the iron level is excessive for the first time with no history of an increasing trend, then resample immediately to confirm condition. The oil and filter are unfit for continued use. Change the filter immediately and either centrifuge or change the oil. Prolonged usage of oil with excessive iron levels can adversely affect product performance and damage the equipment. Contact your ExxonMobil representative for further assistance if necessary.

ACTION REQUIRED - ELEVATED SILICON LEVEL. Determine source of Silicon (Si) and take corrective action. If the silicon level is elevated for the first time with no history of an increasing trend, then resample immediately to confirm condition. If the wear metals levels are low, then the silicon likely exists in a non-abrasive form. Possible sources of non-abrasive silicon include: a. Defoamants; b. Sealant compounds. If wear metals levels are elevated, then the silicon likely exists in an abrasive form. Possible sources of abrasive silicon include: a. Abrasive dirt; b. Contamination from environment during an equipment overhaul or shutdown. Other possible sources of silicon include: a. Inefficient or leaking air intake filters; b. Leaking pipes; c. Clogged oil bath air filter; d. Poor oil filtration; e. Dirty sample containers or improper sampling procedures. In landfill gas applications, silicon can enter the engine as a siloxane. This material is a gas and is not normally abrasive; however, siloxanes can easily mask the presence dirt. The oil may be unfit for continued use and should be monitored closely for further condition regressions. Prolonged usage of lubricants with elevated levels of abrasive silicon can cause severe wear and damage to the equipment. Inspect the equipment for signs of excessive wear and change the oil immediately if damage is detected. Contact your ExxonMobil representative for further assistance if necessary.

Sample Timeline

- 28 Oct 2025 9:52 PM UTC - Brad Roy - In Service Oil Sample   Comments: Photo: