Mobil™

Alert

Unit ID: **1212** Asset ID: **51414379**

Description: **rear diff**

Account Information

ID: **402009**

Name: **Greer Lime**

Address: **1088 Germany Valley Limestone Road, Riverton, WV 26814-0000 US**

Parent Account: **MATTHEWS LUBRICANTS, INC.**

Sample Information

Sample ID: **25296320033**

Service Level: **Essential**

Bottle ID: **a037320411**

Tested Lubricant: **MOBIL DELVAC MODERN OFF-HIGHWAY TRANS FLUID 50**

Equipment Information

Asset Class: **Gear Drive**

Manufacturer: **CATERPILLAR**

Model:

Lubricant: **MOBIL DELVAC MODERN OFF-HIGHWAY TRANS FLUID 50**

Sample Data & Trends

Sample Info	Report Status	Alert	Alert	Alert	Alert	Alert
	Sample ID	24122146011	25059237022	25111107049	25240382024	25296320033
	Service Level	Essential	Essential	Essential	Essential	Essential
	Bottle ID	a029199781	a033556177	a033666396	A033689715	a037320411
	Tested Lubricant	MOBILTRANS HD 50	MOBILTRANS HD 50	MOBILTRANS HD 50	MOBIL DELVAC MODERN OFF-HIGHWAY TRANS FLUID 50	MOBIL DELVAC MODERN OFF-HIGHWAY TRANS FLUID 50
	Sampled	25 Apr 2024	11 Dec 2024	02 Apr 2025	21 Aug 2025	13 Oct 2025
	Reported	08 May 2024	04 Mar 2025	23 Apr 2025	29 Aug 2025	24 Oct 2025
	Equipment Age		13369	14245	150003	15726
	Equipment UOM		Hours	Hours	Hours	Hours
	Oil Age					
	Make-up Volume					
	Oil Changed	Yes	Yes	No	Yes	No
	Filter Changed	No	Yes	No	Yes	No
Lubricant	Contamination Rating	Normal	Normal	Normal	Caution	Caution
	Equipment Rating	Alert	Alert	Alert	Alert	Alert
	Lubricant Rating	Normal	Normal	Normal	Normal	Normal
	Visc@100C (cSt)	17.2	17.1	17.1	17.1	17.0
	Oxidation (Ab/cm)	1	1	1	3	1
	Water (Vol.%)	NotDetected	NotDetected	NotDetected	NotDetected	NotDetected
Wear (ppm)	Ag (Silver)	0	0	0	0	0
	Al (Aluminum)	2	4	4	5	2
	Cr (Chromium)	1	1	1	1	1
	Cu (Copper)	14	21	24	34	14
	Fe (Iron)	291	707	846	1047	422
	Mo (Molybdenum)	0	1	0	1	1
	Ni (Nickel)	0	1	1	1	0
	Pb (Lead)	0	0	0	0	0
	Sn (Tin)	1	0	0	1	0
Contaminant (ppm)	K (Potassium)	0	0	0	0	1
	Na (Sodium)	2	1	1	2	1
	Si (Silicon)	9	12	12	15	17
Additive (ppm)	B (Boron)	1	1	1	2	2
	Ba (Barium)	1	0	0	0	0
	Ca (Calcium)	2961	3050	2851	3192	3598
	Mg (Magnesium)	11	12	11	12	18
	P (Phosphorus)	816	814	797	950	952
	Zn (Zinc)	857	721	713	808	1051

Viscosity

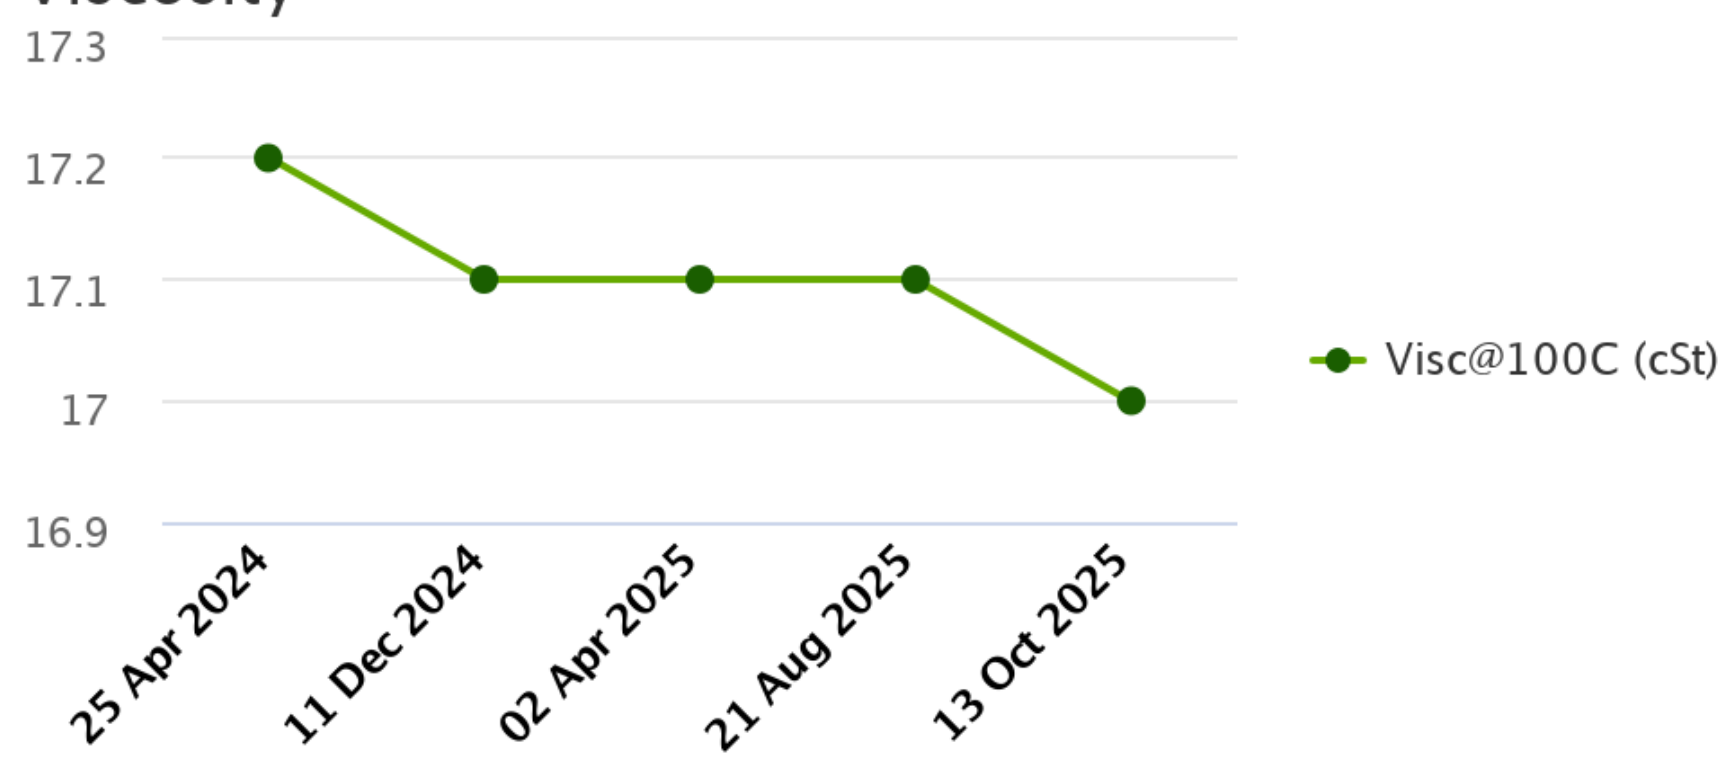

Wear

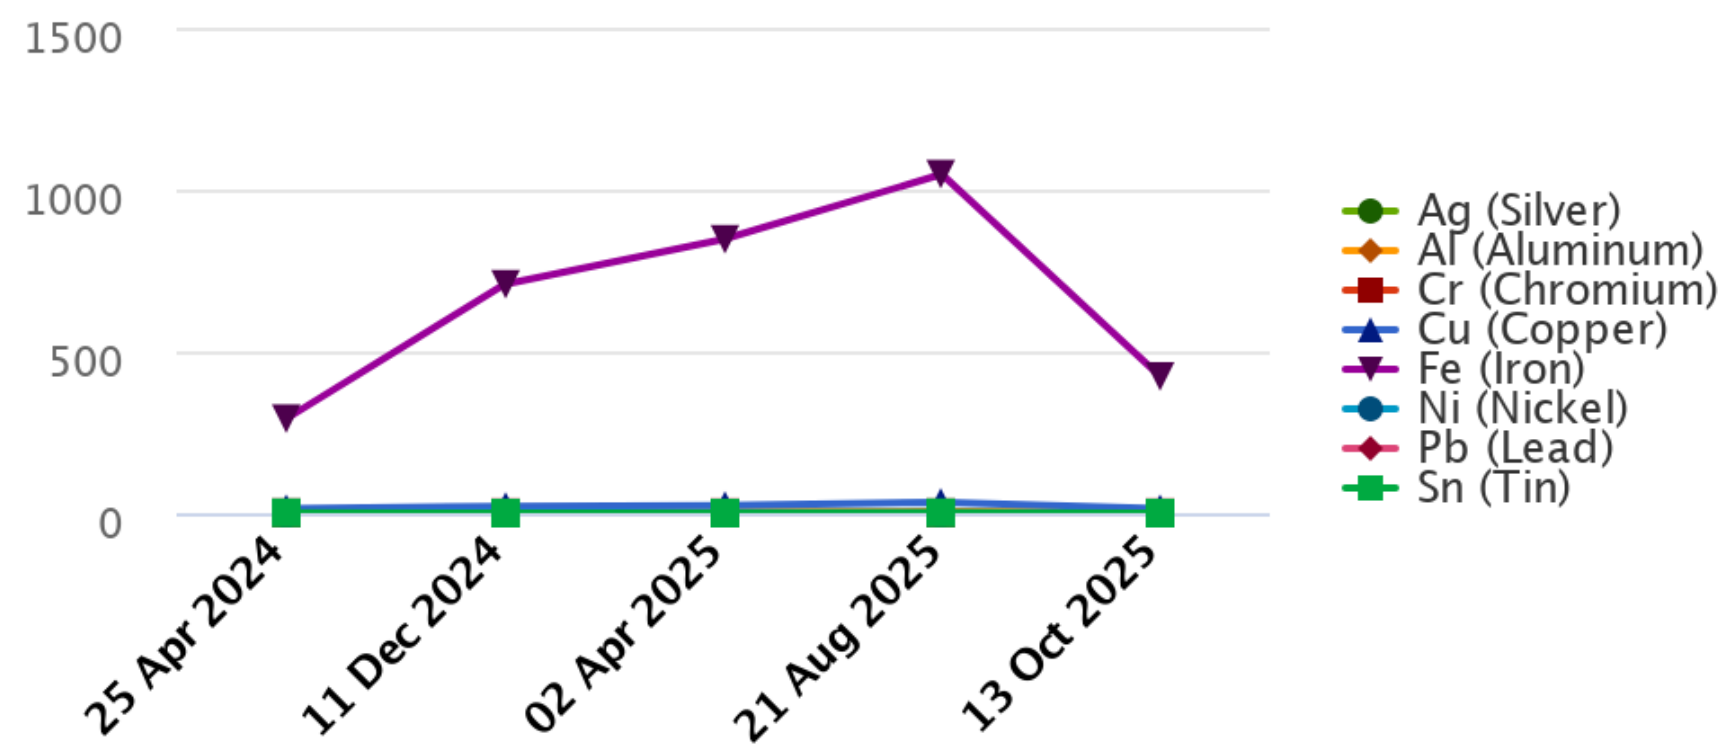

Contaminants

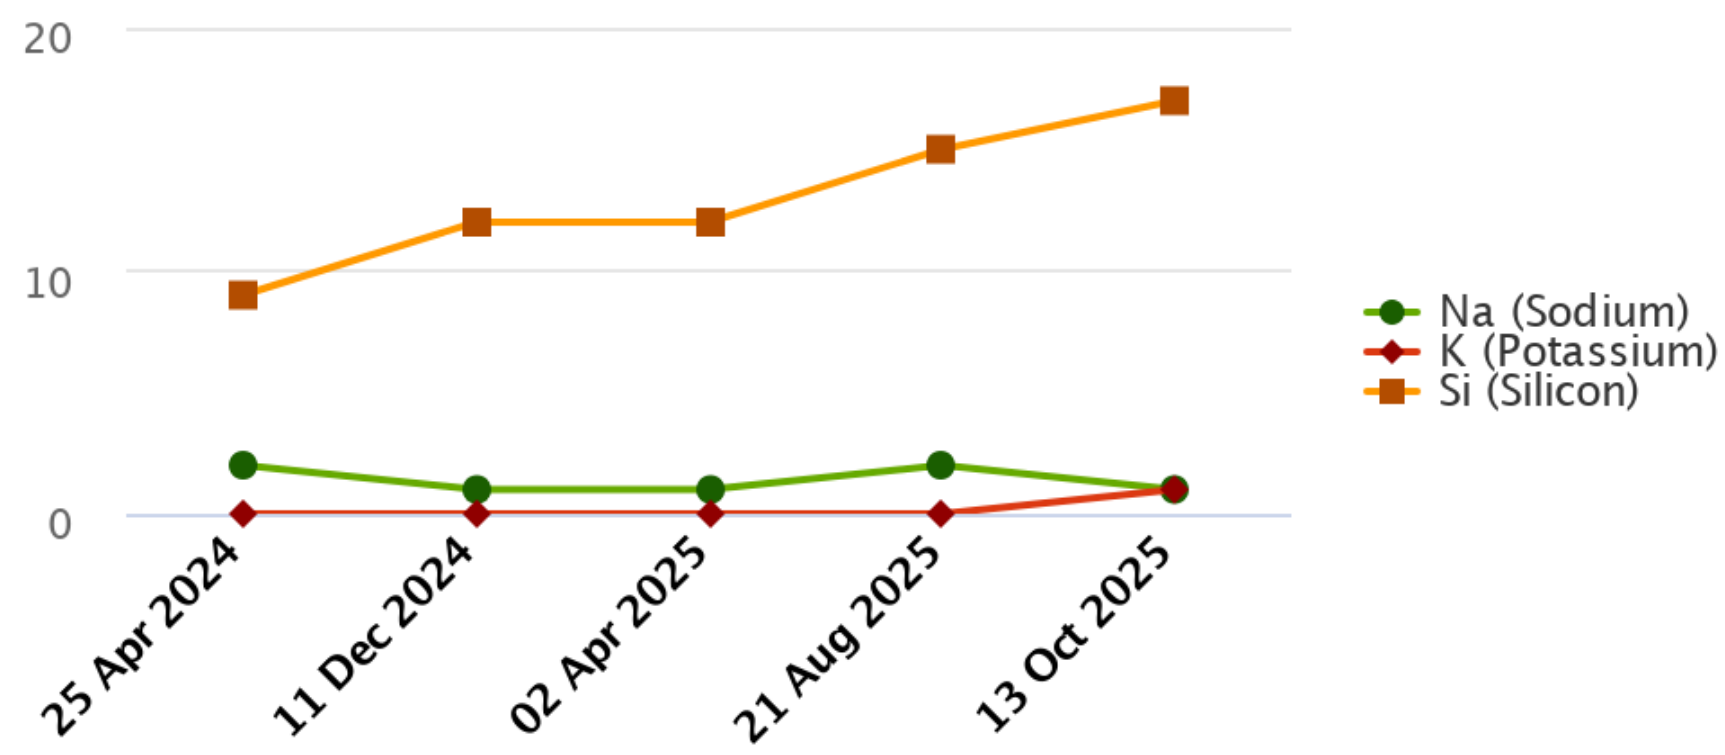

Physical Properties

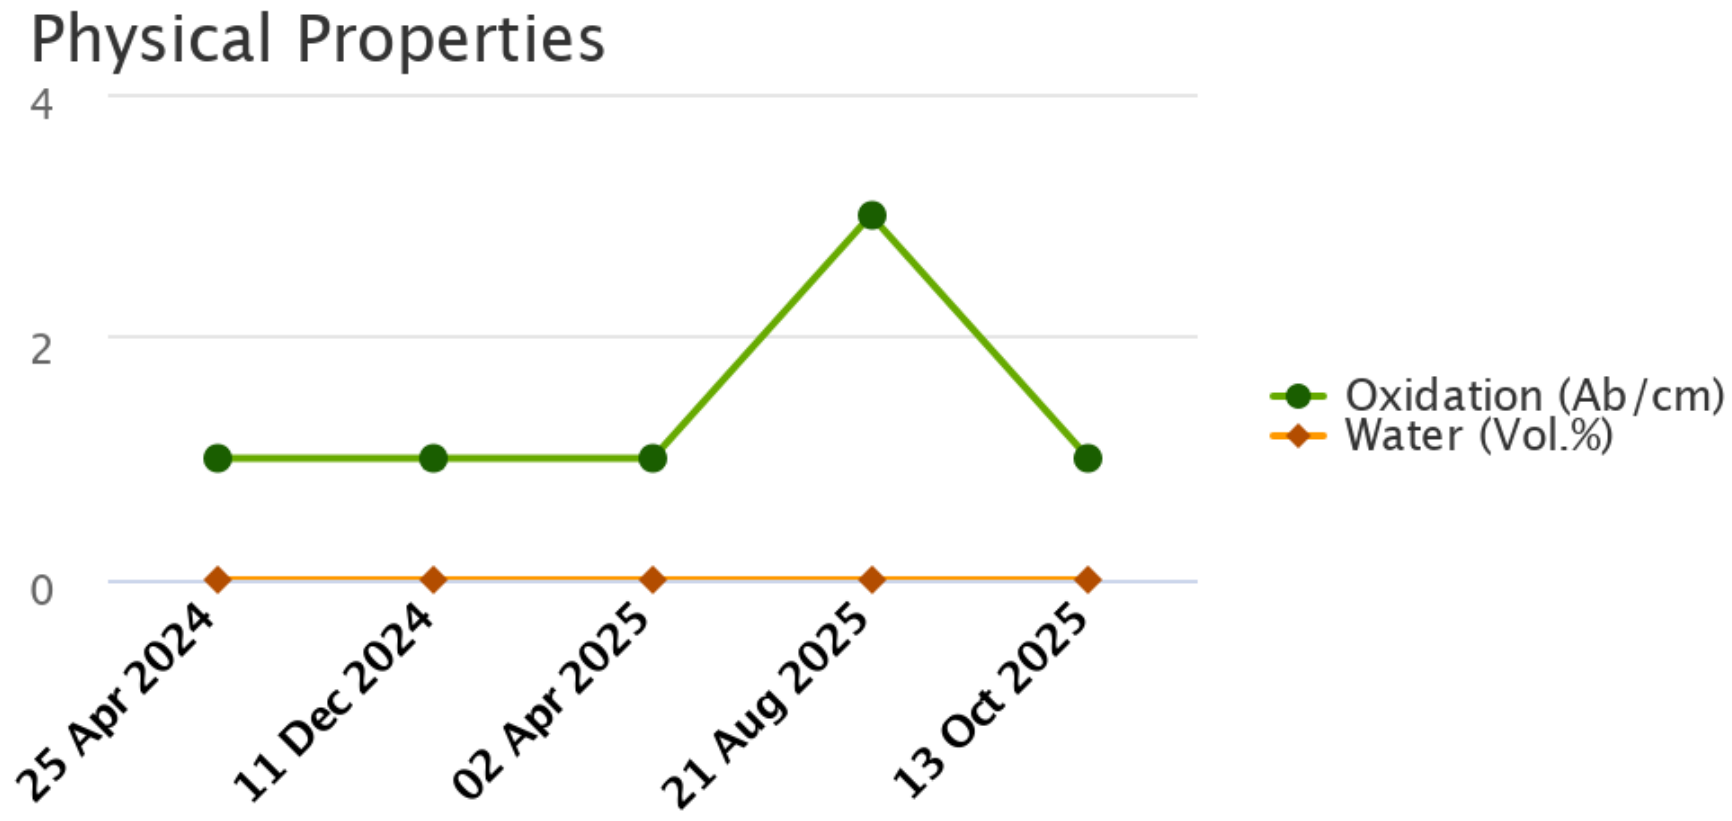

Alert	
Unit ID: **1212**	Asset ID: **51414379**
Description: **rear diff**	

Account Information	Sample Information	Equipment Information
ID: **402009**	Sample ID: **25296320033**	Asset Class: **Gear Drive**
Name: **Greer Lime**	Service Level: **Essential**	Manufacturer: **CATERPILLAR**
Address: **1088 Germany Valley Limestone Road, Riverton, WV 26814-0000 US**	Bottle ID: **a037320411**	Model:
Parent Account: **MATTHEWS LUBRICANTS, INC.**	Tested Lubricant: **MOBIL DELVAC MODERN OFF-HIGHWAY TRANS FLUID 50**	Lubricant: **MOBIL DELVAC MODERN OFF-HIGHWAY TRANS FLUID 50**

Continued

Recommendation/Comments

ACTION REQUIRED - ELEVATED IRON LEVEL. Determine source of Iron (Fe) and take corrective action. If the iron level is elevated for the first time with no history of an increasing trend, then resample immediately to confirm condition. Possible sources of iron include: a. Machinery component wear; b. Metal-to-metal contact; c. Corrosion; d. Abrasive dirt contamination. The oil may be unfit for continued use and should be closely monitored for further condition regressions. Inspect the equipment for signs of damage. Change the oil after corrective measures have been implemented. Contact your ExxonMobil representative for further assistance if necessary.

ACTION REQUIRED - EXCESSIVE IRON LEVEL. Determine source of Iron (Fe) and take corrective action. If the iron level is excessive for the first time with no history of an increasing trend, then resample immediately to confirm condition. The oil and filter are unfit for continued use. Change the filter immediately and either centrifuge or change the oil. Prolonged usage of oil with excessive iron levels can adversely affect product performance and damage the equipment. Contact your ExxonMobil representative for further assistance if necessary.

CAUTION - ELEVATED SILICON LEVEL. Determine source of Silicon (Si) and take corrective action. If the silicon level is elevated for the first time with no history of an increasing trend, then resample immediately to confirm condition. If wear metals levels are low, then the silicon likely exists in a non-abrasive form. Possible sources of non-abrasive silicon include: a. Defoamants; b. Sealant compounds. If wear metal levels are elevated, then the silicon likely exists in an abrasive form. Possible sources of abrasive silicon include: a. Abrasive dirt remaining in equipment due to ineffective purification and / or filtration; b. Faulty seals, breather, fill caps; c. Improper sampling techniques that result in dirt contaminating the sample. The oil may be unfit for continued use and should be monitored closely for further condition regressions. Prolonged usage of lubricants with elevated levels of abrasive silicon can cause severe wear and damage to the equipment. Inspect the equipment for signs of excessive wear. Change the oil immediately if the condition escalates. Contact your ExxonMobil representative for further assistance if necessary.

Sample Timeline

- 13 Oct 2025 3:26 PM UTC - Josh Simmons - In Service Oil Sample   Comments: Photo: