

Building a Better Thermostat

Matthew Treinish

mtreinish@kortar.org

mtreinish on Freenode

March 18, 2017

Room Layout



Poor Cooling



Thermostat

- ▶ Closed Loop control device for heating and/or cooling system
- ▶ Senses current temperature and

Home Assistant

- ▶ Open Source Home Automation Platform
- ▶ Written in Python 3
- ▶ Has support for over 600 different components
- ▶ Runs locally (with all data locally)

Controlling the AC

- ▶ Can't take apart the AC (I don't own it)
- ▶ No identifying information for the AC
- ▶ Control via power (use a relay to turn on and off)

- ▶ Use Z-Wave outlet to control
- ▶




Sensing the Living Room Temperature

- ▶ Wireless sensor
- ▶ Leverage Z-Wave network
- ▶ Got a

Bedroom Temperature Sensing

- ▶ Track both bedroom and “data” closet temperatures
- ▶ Leverage spare raspberry pi sitting in “data” closet

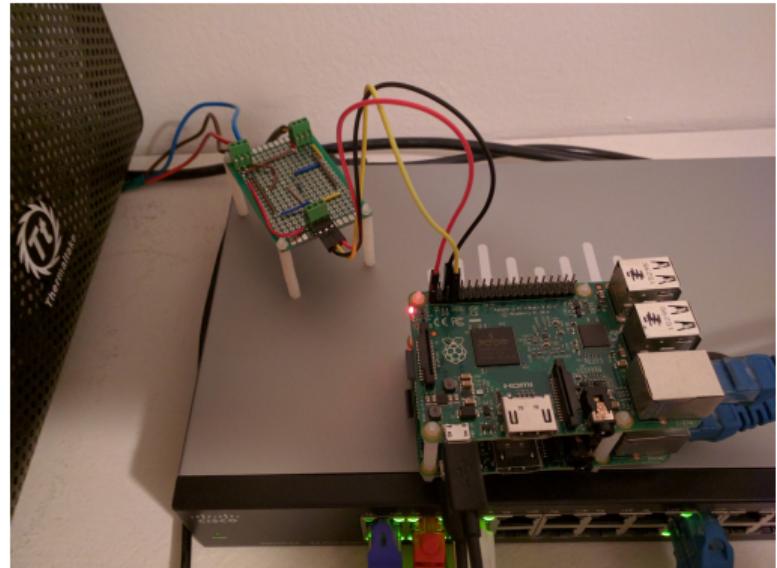

DallasMQTT

- ▶ Framework for polling sensors and pushing results on MQTT
- ▶ Handles an arbitrary number of sensors
- ▶ Currently only supports Dallas 1 wire from w1_therm linux driver
- ▶ Written in python

Cycle Time



- ▶ Bedroom on for 8 min. and off for 4 min.
- ▶ Living Room on for 4 min. off for 2 min.

Starting to Automate

Location Tracking

Owntracks

Future Work

- ▶ More Sensors
- ▶ More automation
- ▶ Fix power usage collection

Where to get more information

- ▶ Blog Post <http://blog.kortar.org/?p=319>
- ▶ <https://home-assistant.io/>
- ▶ <https://github.com/mtreinish/dallasMQTT>

Questions?