




### PLUGS

- IP44
-  for severe conditions
- 16A 250V~
- rubber and solid rubber
- single and dual-point earthing system



Rubber




Solid rubber

easy assembly and disassembly  
of the contact carriers  
large connection area  
time saving installation

simple handling  
robust design  
easy disassembly of shroud  
slim design



### PLUG SYSTEMS

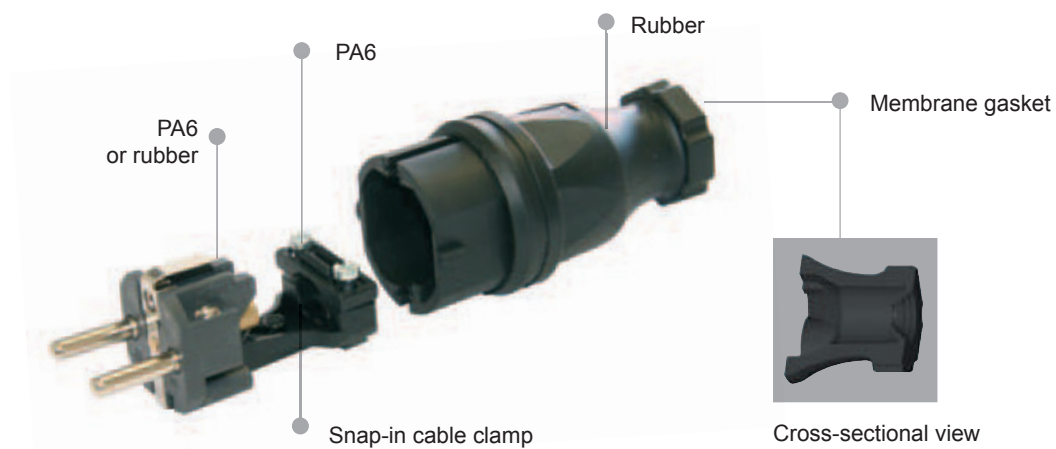

Max. 3G2,5 mm<sup>2</sup> rubber-sheathed flexible cable