



EWB 25000

SPECIFICATIONS

Rated line pull: 25000lbs (11340 kgs)

Motor: Series wound 24V/Input:6.1kW/8.2hp;

Output:3.1kW/4.2hp

Brake: Patented ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 450:1

Waterproof: IP67

Cable (Dia×L): Ø7/13"x87' (Ø13.8mmx26.5m)

Drum size (Dia×L): Ø4.72"x7.8" (Ø128mmx198mm)


Mounting bolt pattern:

10"x4.5" (254x114.3mm)

10"x7.5" (254x199.5mm)

Net weight: 219.4lbs/99.5kgs

DIMENSIONS

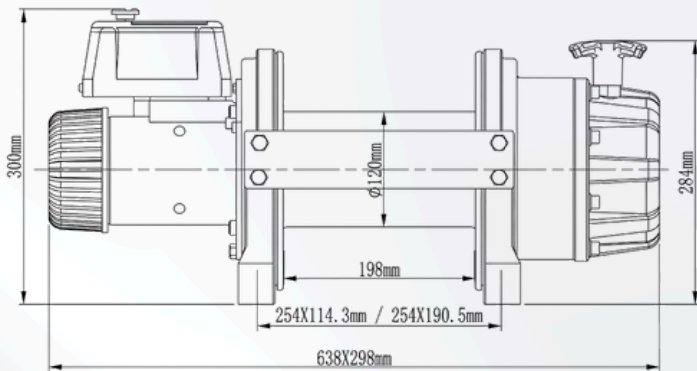

24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	30349.9)	23amps	1/23000(11340)
5000(2266)	11.1 (2.4)	90amps	2/20724(9460)
10000(4536)	8.2 (3.3)	140amps	3/17698(8027)
15000(8504)	6.6 (2.0)	180amps	4/15444(7005)
20000(0072)	5.2 (1.6)	230amps	
25000(11340)	5.2 (1.2)	280amps	