



HWE 150

SPECIFICATIONS

Rated line pull: 33000 lbs (15000 kgs)

Motor displacement: 250ml/r

Oil flow: 10~120L/min

Pressure: 20Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 40.6:1

Waterproof: IP67

Cable (Dia×L): Ø7/8"×131' (Ø22mm×40m)


Drum size (Dia×L): Ø8.27"×13.39" (Ø210mm×340mm)

Mounting bolt pattern:

20.55"×7.09"×11.02" (522mm×180mm×280mm)8-M20

Net weight: 400kg

DIMENSIONS

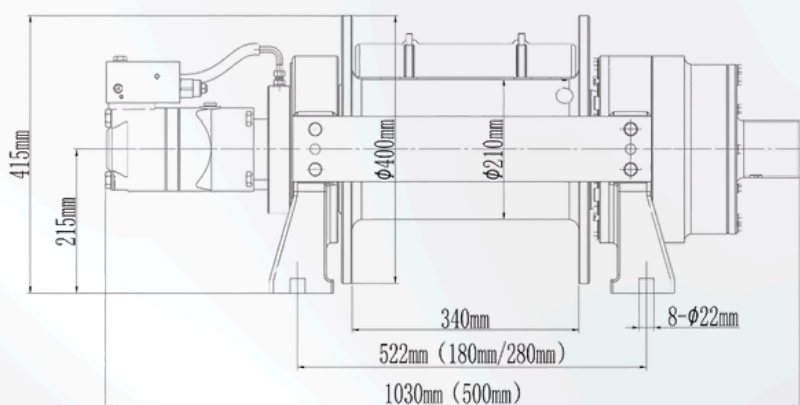

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	4(580.2)	5.3(20)	4.3(1.3)	1/33000 (15000)
21000 (9526)	10(1450.4)	15.9(60)	13.8(4.2)	2/27700 (12565)
23900 (10841)	12(1740.5)	21.1(80)	18(5.5)	3/23900 (10841)
27700 (12565)	15(2175.6)	26.4(100)	22.6(6.9)	4/21000 (9526)
33000 (15000)	18(2610.7)	33(125)	27.9(8.5)	