



HWE 200

SPECIFICATIONS

Rated line pull: 44000 lbs (20000 kgs)

Motor displacement: 315ml/r

Oil flow: 10~120L/min

Pressure: 20Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 36:1

Waterproof: IP67

Cable (Dia×L): Ø1.02"×131'(Ø26mm×40m)


Drum size (Dia×L): Ø8.27"×13.39"(Ø210mm×340mm)

Mounting bolt pattern:

20.94"×6.3"×11.02"(532mm×160mm×280mm) 8-M24

Net weight: 505kg

DIMENSIONS

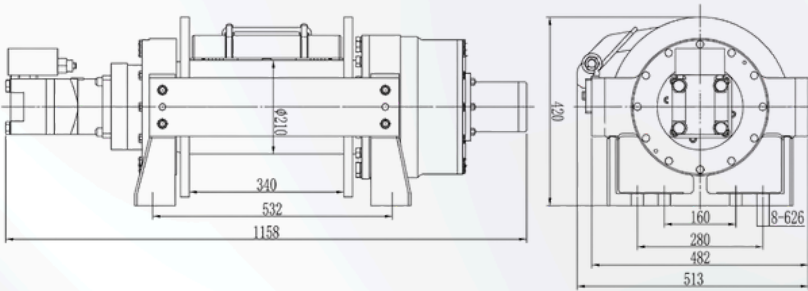

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	7.5(1087.8)	5.3(20)	3.3(1.0)	1/44000(20000)
22000(10000)	10(1450.4)	13.2(50)	8.9(2.7)	2/36128(16388)
33000(15000)	15(2175.6)	22.5(85)	15.4(4.7)	3/30600(13882)
44000(20000)	20(2900.8)	31.7(120)	23.0(7.0)	4/26543(12040)