




## DIMENSIONS

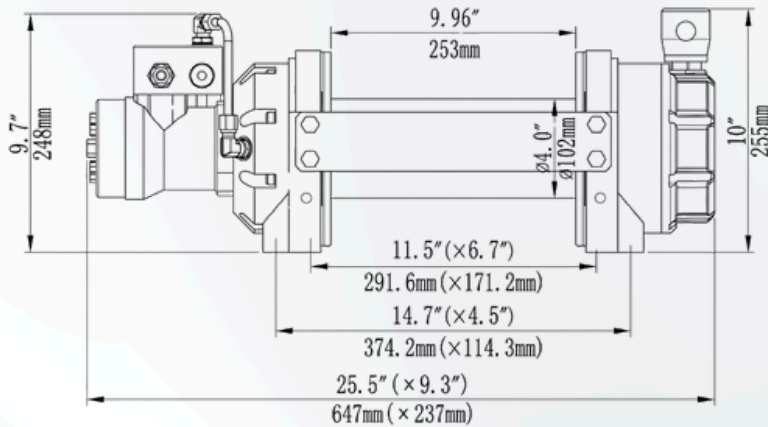

# HWV 10000

## SPECIFICATIONS

**Rated line pull:** 10000 lbs (4536 kgs)

**Standard:** European EN

**Motor displacement:** 100ml/r

**Oil flow:** 15~60L/min

**Pressure:** 15Mpa

**Brake:** Wet-type hydraulic brake

**Geartrain:** Planetary steel gear

**Gear reduction ratio:** 17.6:1

**Clutch:** Air, manual, air & manual optional

**Waterproof:** IP67

**Cable (Dia x L):** Ø13/32" x 83.7' (Ø10.2mm x 25.5m)

**Drum size (Dia x L):** Ø4.0" x 10.0" (Ø102mm x 253mm)

**Mounting bolt pattern:**

- 14.7" x 4.5" (374.2mm x 114.3mm)
- 11.5" x 6.7" (291.6mm x 171.2mm) 8-M10

**Net weight:** 112.4lbs / 51kgs

## PERFORMANCE SPECS (first layer)

| Line Pull    | Pressure     | Flow        | Line speed   | Pull by layer:  |
|--------------|--------------|-------------|--------------|-----------------|
| Lbs.(kgs)    | Mpa(Psi)     | G/min L/min | ft/min m/min | layer/Lbs.(kgs) |
| 0            | 3.0(435.1)   | 1.3(5)      | 3.0(0.9)     | 1/10000(4536)   |
| 4000 (1814)  | 6.8(986.2)   | 2.6(10)     | 5.9(1.8)     | 2/7355(3336)    |
| 6000 (2722)  | 9.2(1334.3)  | 5.2(20)     | 11.8(3.6)    | 3/6780(3075)    |
| 8000 (3629)  | 12.0(1740.4) | 10.4(40)    | 23.6(7.2)    | 4/5711(2591)    |
| 10000 (4536) | 15.0(2175)   | 15.6(60)    | 36.1(11)     |                 |