


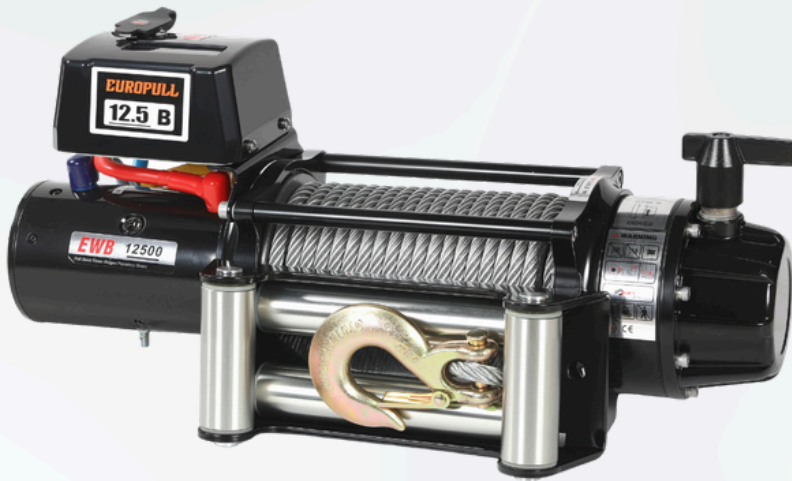

EWB 12500

SPECIFICATIONS

Rated line pull: 12500 lbs (5670 kgs)

Motor: series wound

- 24V: Input: 4.8kW/6.4hp; Output: 3.1kW/4.2hp

Brake: Ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 228:1

Clutch: Rotary

Waterproof: IP67


Cable (Dia×L): Ø13/32"×83.7'(Ø10.2mm×25.5m)

Drum size (Dia×L): Ø2.48"×8.5"(Ø63mm×217mm)

Mounting bolt pattern: 10"×4.5"(254×114.3mm)4-M10

Net weight: 97.2lbs/44.1kgs

DIMENSIONS

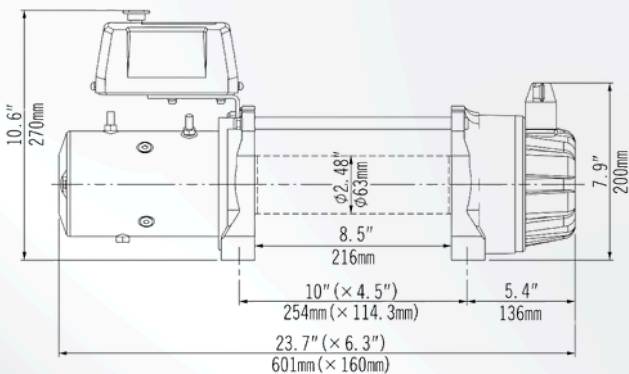

24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	32.8(10.0)	75amps	1/12500(5670)
3000 (1361)	15.7(4.8)	190amps	2/9776(4434)
6000 (2722)	11.5(3.5)	285amps	3/8026(3641)
9000 (4082)	8.2(2.5)	360amps	4/6808(3088)
12500 (5670)	5.2(1.6)	490amps	