




DIMENSIONS

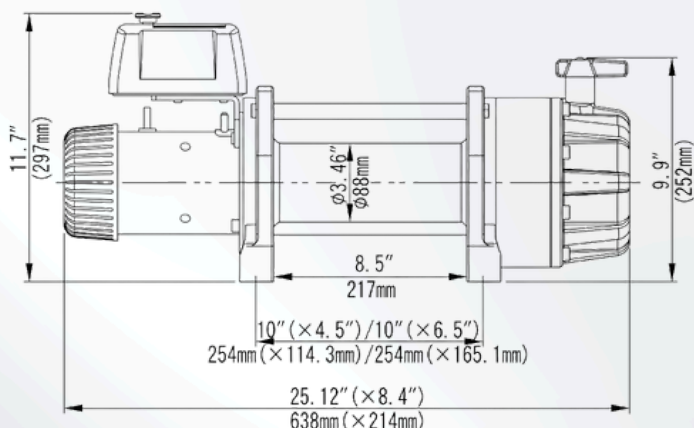

24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	26.2(8.0)	60amps	1/18000 (8165)
6000 (2722)	10.5(3.2)	180amps	2/14516(6584)
10000 (4536)	7.87(2.4)	260amps	3/12162(5516)
14000 (6350)	6.56(2.0)	320amps	4/10465(4747)
18000(8165)	4.92(1.5)	360amps	

EWB 20000

SPECIFICATIONS

Rated line pull: 20000 lbs (9072 kgs)

Motor: series wound

- 24V: Input: 6.1kW/8.2hp; Output: 3.1kW/4.2hp

Brake: Patented ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 370:1

Waterproof: IP67

Cable (Dia $\times$ L): $\phi 15/32" \times 87'$ ($\phi 12mm \times 26.5m$)

Drum size (Dia $\times$ L): $\phi 3.46" \times 8.43"$ ($\phi 88mm \times 214mm$)

Mounting bolt pattern:

- 10" $\times$ 4.5" (254 $\times$ 114.3mm)
- 10" $\times$ 6.5" (254 $\times$ 165.1mm)

Net weight: 154.3lbs / 70kgs