



HWE 100

SPECIFICATIONS

Rated line pull: 22000 lbs (10000 kgs)

Motor displacement: 200ml/r

Oil flow: 15~75L/min

Pressure: 16Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 37.8:1

Waterproof: IP67


Cable (Dia×L): Ø5/7"×131' (Ø18mm×40m)

Drum size (Dia×L):
Ø7.46"×13.39" (Ø189.5mm×340mm)

Mounting bolt pattern:
20.55"×7.09"×11.02" (522mm×180mm×280mm)8-M20

Net weight: 340kg

DIMENSIONS

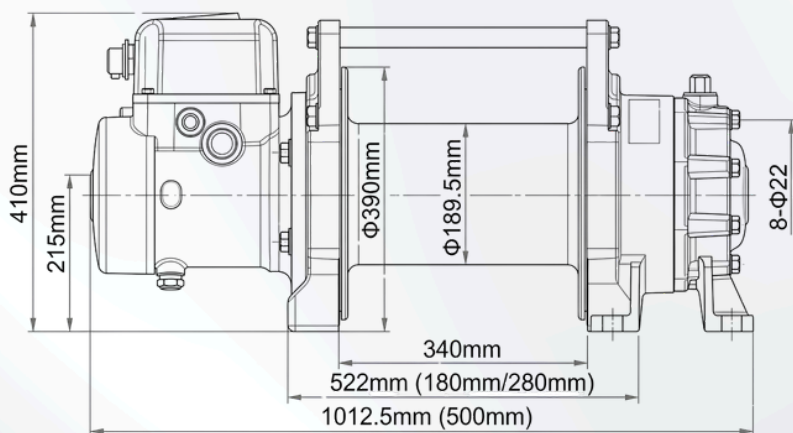

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	3.5(507.5)	4.0(15)	4.3(1.3)	1/22000 (10000)
14500 (6577)	7(1015)	10.6(40)	10.8(3.3)	2/18700 (8482)
16300 (7394)	10.5(1522.5)	13.2(50)	13.5(4.1)	3/16300 (7394)
18700 (8482)	14(2030)	15.9(60)	15.8(4.8)	4/14500 (6577)
22000 (10000)	16(2320)	19.8(75)	20.0(6.1)	