




DIMENSIONS

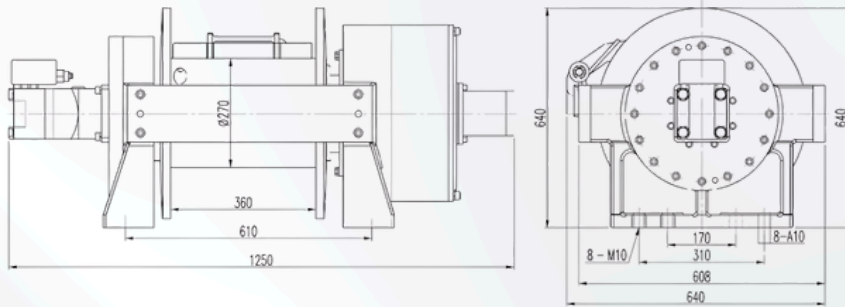

HWE 300

SPECIFICATIONS

Rated line pull: 66000 lbs (30000 kgs)

Motor displacement: 500ml/r

Oil flow: 10~120L/min

Pressure: 16Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 53:1

Waterproof: IP67

Cable (Dia×L): Ø1.26"×131'(Ø32mm×40m)

Drum size (Dia×L): Ø10.63"×14.2"(Ø270mm×360mm)

Mounting bolt pattern:

24"×6.7"×11.2"(610mm×170mm×310mm) 8-M27

Net weight: 930kg

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	7(1015.3)	5.3(20)	2.0(0.6)	1/66000(30000)
44000(20000)	11(1595.4)	13.2(50)	5.2(1.6)	2/54572(24754)
55000(25000)	14(2030.5)	22.5(85)	9.8(3.0)	3/46450(21070)
66000(30000)	16(2320.6)	31.7(120)	13.5(4.1)	4/40432(18340)