



HWV 12000

SPECIFICATIONS

Rated line pull: 12000 lbs (5443 kgs)

Motor displacement: 65ml/r

Oil flow: 15~45L/min

Pressure: 11Mpa

Gear reduction ratio: 28:1

Cable (Dia×L): Ø13/32"×83.7'(Ø10.2mm×25.5m)


Drum size (Dia×L): Ø2.48"×8.45"(Ø63mm×217mm)

Mounting bolt pattern:

10"×4.5"(254mm×114.3mm) 4-M12

Net weight: 94lbs/42.8kgs

DIMENSIONS

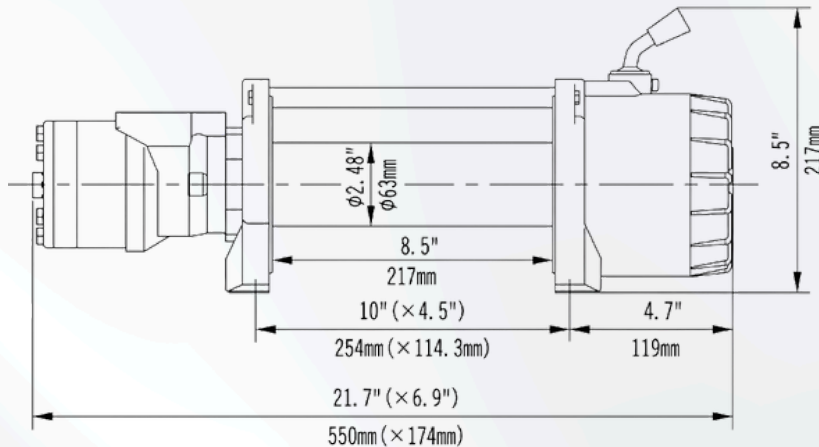

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Line Speed	Flow	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	Ft/min. (M/min.)	G/min. (L/min.)	layer/Lbs.(kgs)
0	2.0(290.1)	1.6(0.5)	1.3(5)	1/12000 (5443)
3000 (1361)	3.3(478.6)	3.6(1.1)	2.6(10)	2/9563(4338)
6000 (2722)	7.2(1044.2)	7.5(2.3)	5.2(20)	3/7949(3606)
9000 (4082)	9.2(1344.3)	13.1(4.0)	9.2(35)	4/6801(3085)
12000 (5443)	11.0(1595.4)	17.4(5.3)	11.9(45)	