



HWV 15000

SPECIFICATIONS

Rated line pull: 15000 lbs (6804 kgs)

Standard: European EN

Motor displacement: 160ml/r

Oil flow: 15~60L/min

Pressure: 17.5Mpa

Brake: Wet-type hydraulic brake

Geartrain: Planetary steel gear

Gear reduction ratio: 17.3:1

Clutch: Air, manual, air&manual optional

Waterproof: IP67

Cable (Dia×L): Ø15/32"×86.9' (Ø12mm×26.5m)

Drum size (Dia×L): Ø5.0"×10.5" (Ø127mm×266mm)


Mounting bolt pattern:

12.0"×4.5" (303.5mm×114.3mm)

14.5"×6.7" (368.5mm×171.2mm) 8-M12

Net weight: 184.3lbs/83.6kgs

DIMENSIONS

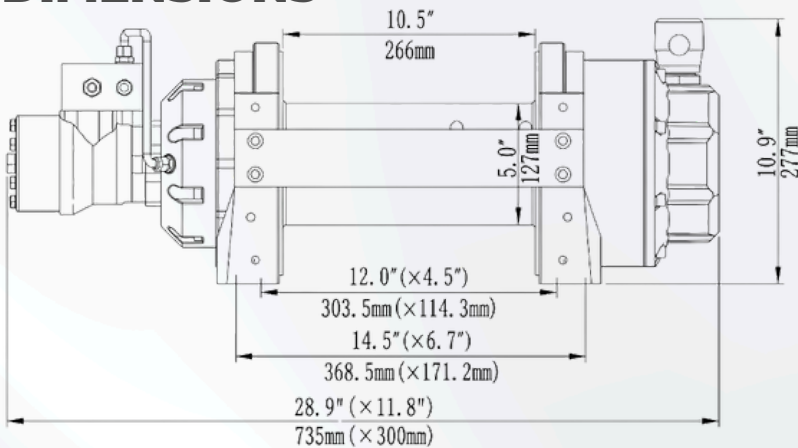

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	2.0(290)	2.6(10)	4.2(1.3)	1/15000(6804)
8000 (3629)	9.2(1337)	5.2(20)	8.5(2.6)	2/12791(5807)
10000 (4536)	11.5(1627)	7.9(30)	12.4(3.8)	3/11150(5062)
12000 (5448)	14.0(2030)	10.4(40)	16.7(5.1)	
15000 (6810)	17.5(2537)	15.6(60)	23(7.0)	