



HWV 10000

SPECIFICATIONS

Rated line pull: 10000 lbs (4536 kgs)

Standard: European EN

Motor displacement: 100ml/r

Oil flow: 15~60L/min

Pressure: 15Mpa

Brake: Wet-type hydraulic brake

Geartrain: Planetary steel gear

Gear reduction ratio: 17.6:1

Clutch: Air, manual, air & manual optional

Waterproof: IP67

Cable (Dia×L): Ø13/32" × 83.7' (Ø10.2mm × 25.5m)


Drum size (Dia×L): Ø4.0" × 10.0" (Ø102mm × 253mm)

Mounting bolt pattern:

- 14.7" × 4.5" (374.2mm × 114.3mm)
- 11.5" × 6.7" (291.6mm × 171.2mm) 8-M10

Net weight: 112.4lbs / 51kgs

DIMENSIONS

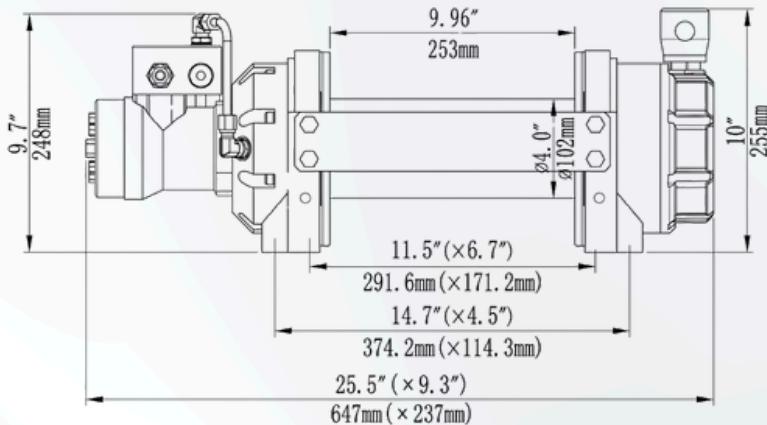

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	3.0(435.1)	1.3(5)	3.0(0.9)	1/10000(4536)
4000 (1814)	6.8(986.2)	2.6(10)	5.9(1.8)	2/7355(3336)
6000 (2722)	9.2(1334.3)	5.2(20)	11.8(3.6)	3/6780(3075)
8000 (3629)	12.0(1740.4)	10.4(40)	23.6(7.2)	4/5711(2591)
10000 (4536)	15.0(2175)	15.6(60)	36.1(11)	



HWV 12000

SPECIFICATIONS

Rated line pull: 12000 lbs (5443 kgs)

Motor displacement: 65ml/r

Oil flow: 15~45L/min

Pressure: 11Mpa

Gear reduction ratio: 28:1

Cable (Dia×L): Ø13/32"×83.7'(Ø10.2mm×25.5m)


Drum size (Dia×L): Ø2.48"×8.45"(Ø63mm×217mm)

Mounting bolt pattern:

10"×4.5"(254mm×114.3mm) 4-M12

Net weight: 94lbs/42.8kgs

DIMENSIONS

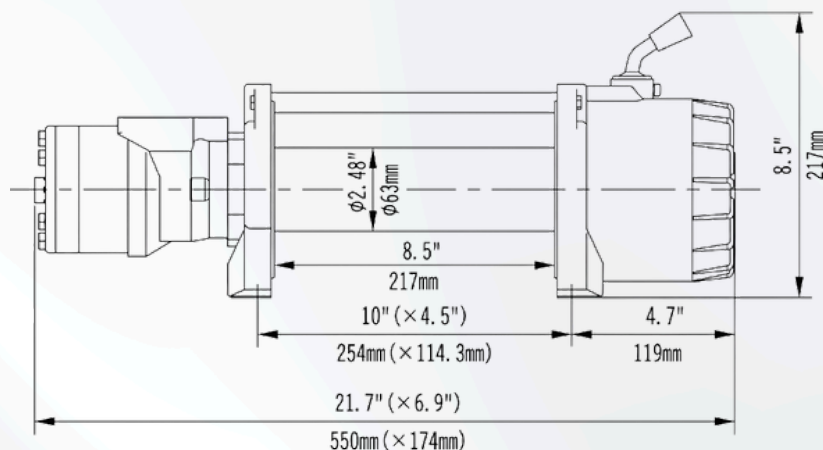

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Line Speed	Flow	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	Ft/min. (M/min.)	G/min. (L/min.)	layer/Lbs.(kgs)
0	2.0(290.1)	1.6(0.5)	1.3(5)	1/12000 (5443)
3000 (1361)	3.3(478.6)	3.6(1.1)	2.6(10)	2/9563(4338)
6000 (2722)	7.2(1044.2)	7.5(2.3)	5.2(20)	3/7949(3606)
9000 (4082)	9.2(1344.3)	13.1(4.0)	9.2(35)	4/6801(3085)
12000 (5443)	11.0(1595.4)	17.4(5.3)	11.9(45)	



HWV 15000

SPECIFICATIONS

Rated line pull: 15000 lbs (6804 kgs)

Standard: European EN

Motor displacement: 160ml/r

Oil flow: 15~60L/min

Pressure: 17.5Mpa

Brake: Wet-type hydraulic brake

Geartrain: Planetary steel gear

Gear reduction ratio: 17.3:1

Clutch: Air, manual, air&manual optional

Waterproof: IP67

Cable (Dia×L): Ø15/32"×86.9' (Ø12mm×26.5m)

Drum size (Dia×L): Ø5.0"×10.5" (Ø127mm×266mm)


Mounting bolt pattern:

12.0"×4.5" (303.5mm×114.3mm)

14.5"×6.7" (368.5mm×171.2mm) 8-M12

Net weight: 184.3lbs/83.6kgs

DIMENSIONS

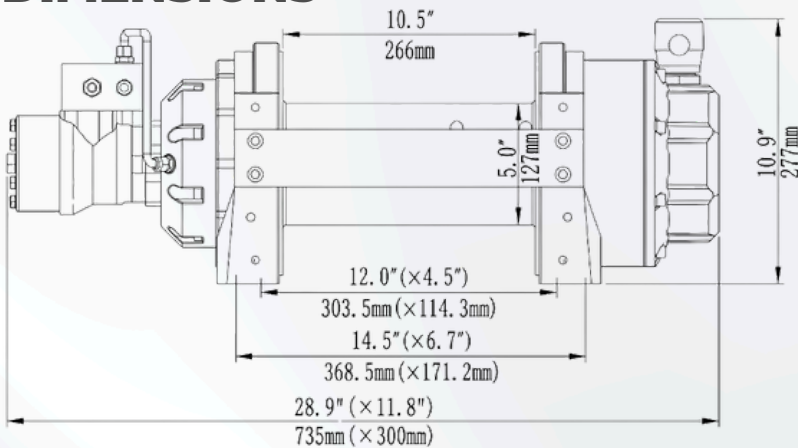

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	2.0(290)	2.6(10)	4.2(1.3)	1/15000(6804)
8000 (3629)	9.2(1337)	5.2(20)	8.5(2.6)	2/12791(5807)
10000 (4536)	11.5(1627)	7.9(30)	12.4(3.8)	3/11150(5062)
12000 (5448)	14.0(2030)	10.4(40)	16.7(5.1)	
15000 (6810)	17.5(2537)	15.6(60)	23(7.0)	



HWE 100

SPECIFICATIONS

Rated line pull: 22000 lbs (10000 kgs)

Motor displacement: 200ml/r

Oil flow: 15~75L/min

Pressure: 16Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 37.8:1

Waterproof: IP67


Cable (Dia×L): Ø5/7"×131' (Ø18mm×40m)

Drum size (Dia×L):
Ø7.46"×13.39" (Ø189.5mm×340mm)

Mounting bolt pattern:
20.55"×7.09"×11.02" (522mm×180mm×280mm)8-M20

Net weight: 340kg

DIMENSIONS

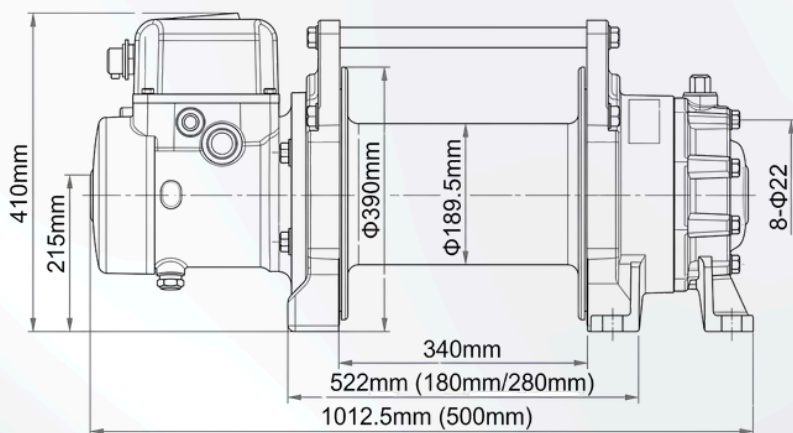

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	3.5(507.5)	4.0(15)	4.3(1.3)	1/22000 (10000)
14500 (6577)	7(1015)	10.6(40)	10.8(3.3)	2/18700 (8482)
16300 (7394)	10.5(1522.5)	13.2(50)	13.5(4.1)	3/16300 (7394)
18700 (8482)	14(2030)	15.9(60)	15.8(4.8)	4/14500 (6577)
22000 (10000)	16(2320)	19.8(75)	20.0(6.1)	



HWE 150

SPECIFICATIONS

Rated line pull: 33000 lbs (15000 kgs)

Motor displacement: 250ml/r

Oil flow: 10~120L/min

Pressure: 20Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 40.6:1

Waterproof: IP67

Cable (Dia×L): Ø7/8"×131' (Ø22mm×40m)


Drum size (Dia×L): Ø8.27"×13.39" (Ø210mm×340mm)

Mounting bolt pattern:

20.55"×7.09"×11.02" (522mm×180mm×280mm)8-M20

Net weight: 400kg

DIMENSIONS

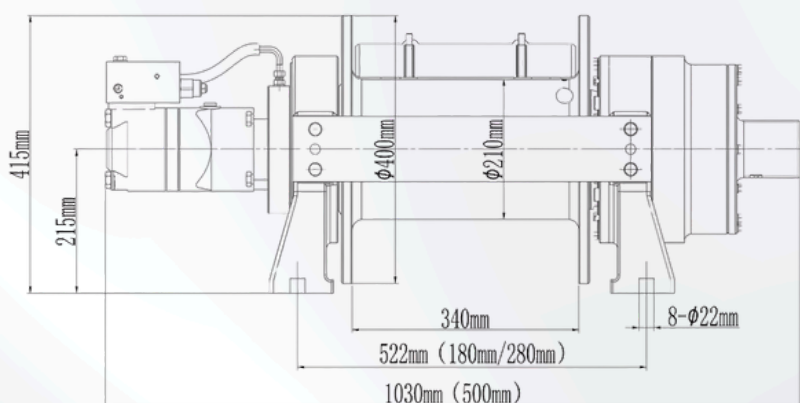

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	4(580.2)	5.3(20)	4.3(1.3)	1/33000 (15000)
21000 (9526)	10(1450.4)	15.9(60)	13.8(4.2)	2/27700 (12565)
23900 (10841)	12(1740.5)	21.1(80)	18(5.5)	3/23900 (10841)
27700 (12565)	15(2175.6)	26.4(100)	22.6(6.9)	4/21000 (9526)
33000 (15000)	18(2610.7)	33(125)	27.9(8.5)	



HWE 200

SPECIFICATIONS

Rated line pull: 44000 lbs (20000 kgs)

Motor displacement: 315ml/r

Oil flow: 10~120L/min

Pressure: 20Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 36:1

Waterproof: IP67

Cable (Dia×L): Ø1.02"×131'(Ø26mm×40m)


Drum size (Dia×L): Ø8.27"×13.39"(Ø210mm×340mm)

Mounting bolt pattern:

20.94"×6.3"×11.02"(532mm×160mm×280mm) 8-M24

Net weight: 505kg

DIMENSIONS

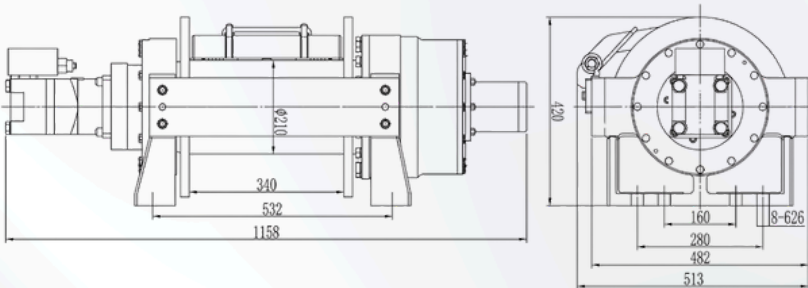


PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	7.5(1087.8)	5.3(20)	3.3(1.0)	1/44000(20000)
22000(10000)	10(1450.4)	13.2(50)	8.9(2.7)	2/36128(16388)
33000(15000)	15(2175.6)	22.5(85)	15.4(4.7)	3/30600(13882)
44000(20000)	20(2900.8)	31.7(120)	23.0(7.0)	4/26543(12040)



DIMENSIONS

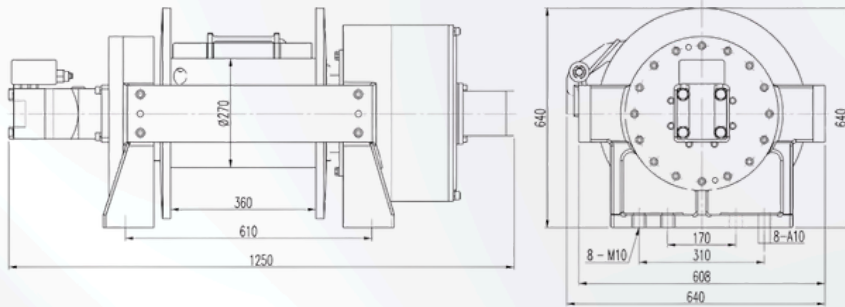

HWE 300

SPECIFICATIONS

Rated line pull: 66000 lbs (30000 kgs)

Motor displacement: 500ml/r

Oil flow: 10~120L/min

Pressure: 16Mpa

Brake: Wet-type hydraulic brake

Geartrain: 2-stage planetary alloy gear

Gear reduction ratio: 53:1

Waterproof: IP67

Cable (Dia×L): Ø1.26"×131'(Ø32mm×40m)

Drum size (Dia×L): Ø10.63"×14.2"(Ø270mm×360mm)


Mounting bolt pattern:

24"×6.7"×11.2"(610mm×170mm×310mm) 8-M27

Net weight: 930kg

PERFORMANCE SPECS (first layer)

Line Pull	Pressure	Flow	Line speed	Pull by layer:
Lbs.(kgs)	Mpa(Psi)	G/min L/min	ft/min m/min	layer/Lbs.(kgs)
0	7(1015.3)	5.3(20)	2.0(0.6)	1/66000(30000)
44000(20000)	11(1595.4)	13.2(50)	5.2(1.6)	2/54572(24754)
55000(25000)	14(2030.5)	22.5(85)	9.8(3.0)	3/46450(21070)
66000(30000)	16(2320.6)	31.7(120)	13.5(4.1)	4/40432(18340)

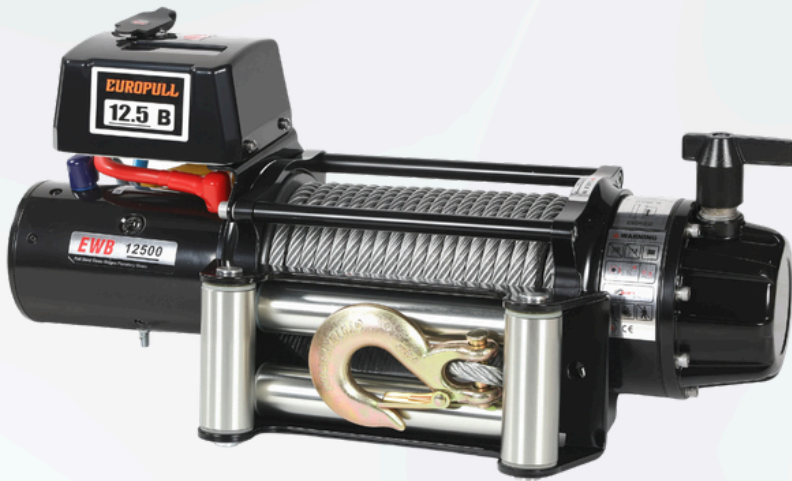

EWB 12500

SPECIFICATIONS

Rated line pull: 12500 lbs (5670 kgs)

Motor: series wound

- 24V: Input: 4.8kW/6.4hp; Output: 3.1kW/4.2hp

Brake: Ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 228:1

Clutch: Rotary

Waterproof: IP67


Cable (Dia×L): Ø13/32"×83.7'(Ø10.2mm×25.5m)

Drum size (Dia×L): Ø2.48"×8.5"(Ø63mm×217mm)

Mounting bolt pattern: 10"×4.5"(254×114.3mm)4-M10

Net weight: 97.2lbs/44.1kgs

DIMENSIONS

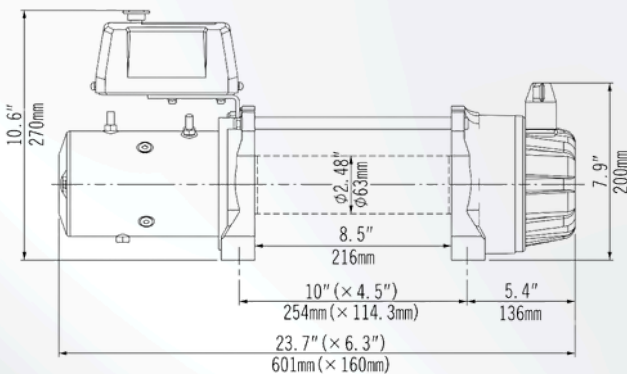


24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	32.8(10.0)	75amps	1/12500(5670)
3000 (1361)	15.7(4.8)	190amps	2/9776(4434)
6000 (2722)	11.5(3.5)	285amps	3/8026(3641)
9000 (4082)	8.2(2.5)	360amps	4/6808(3088)
12500 (5670)	5.2(1.6)	490amps	



DIMENSIONS

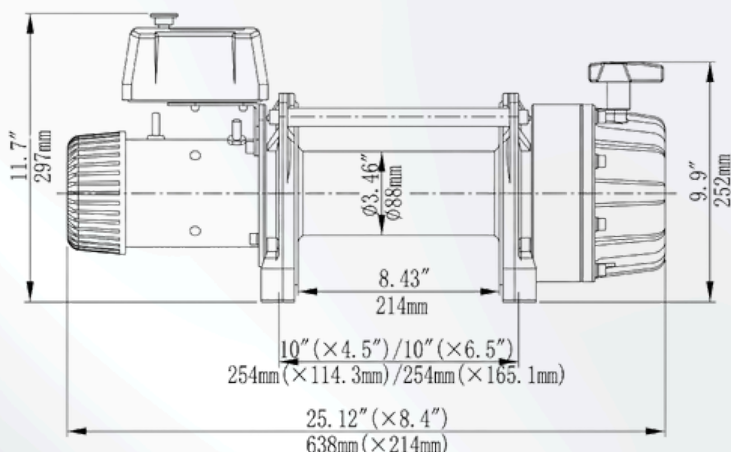

24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	26.2(8.0)	60amps	1/18000 (8165)
6000 (2722)	10.5(3.2)	180amps	2/14516(6584)
10000 (4536)	7.87(2.4)	260amps	3/12162(5516)
14000 (6350)	6.56(2.0)	320amps	4/10465(4747)
18000(8165)	4.92(1.5)	360amps	

EWB 18000

SPECIFICATIONS

Rated line pull: 18000 lbs (8165 kgs)

Motor: series wound

- 24V: Input: 6.1kW/8.2hp; Output: 3.1kW/4.2hp

Brake: Patented ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 370:1

Waterproof: IP67

Cable (Dia×L): Ø15/32"×87' (Ø12mm×26.5m)

Drum size (Dia×L): Ø3.46"×8.43" (Ø88mm×214mm)


Mounting bolt pattern:

- 10"×4.5" (254×114.3mm)
- 10"×6.5" (254×165.1mm)

Net weight: 147.7lbs / 67kgs



DIMENSIONS

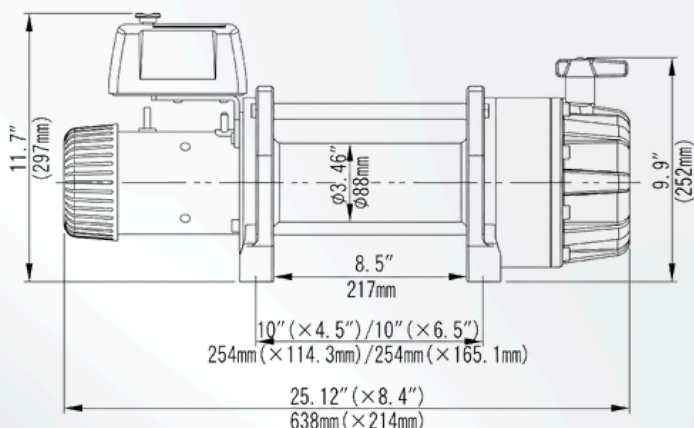

24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	26.2(8.0)	60amps	1/18000 (8165)
6000 (2722)	10.5(3.2)	180amps	2/14516(6584)
10000 (4536)	7.87(2.4)	260amps	3/12162(5516)
14000 (6350)	6.56(2.0)	320amps	4/10465(4747)
18000(8165)	4.92(1.5)	360amps	

EWB 20000

SPECIFICATIONS

Rated line pull: 20000 lbs (9072 kgs)

Motor: series wound

- 24V: Input: 6.1kW/8.2hp; Output: 3.1kW/4.2hp

Brake: Patented ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 370:1

Waterproof: IP67

Cable (Dia $\times$ L): $\phi 15/32" \times 87'$ ($\phi 12mm \times 26.5m$)

Drum size (Dia $\times$ L): $\phi 3.46" \times 8.43"$ ($\phi 88mm \times 214mm$)

Mounting bolt pattern:

- 10" $\times$ 4.5" (254 $\times$ 114.3mm)
- 10" $\times$ 6.5" (254 $\times$ 165.1mm)

Net weight: 154.3lbs / 70kgs



EWB 25000

SPECIFICATIONS

Rated line pull: 25000lbs (11340 kgs)

Motor: Series wound 24V/Input:6.1kW/8.2hp;

Output:3.1kW/4.2hp

Brake: Patented ratchet

Geartrain: 3-stage planetary steel gear

Gear reduction ratio: 450:1

Waterproof: IP67

Cable (Dia×L): Ø7/13"x87' (Ø13.8mmx26.5m)

Drum size (Dia×L): Ø4.72"x7.8" (Ø128mmx198mm)


Mounting bolt pattern:

10"x4.5" (254x114.3mm)

10"x7.5" (254x199.5mm)

Net weight: 219.4lbs/99.5kgs

DIMENSIONS

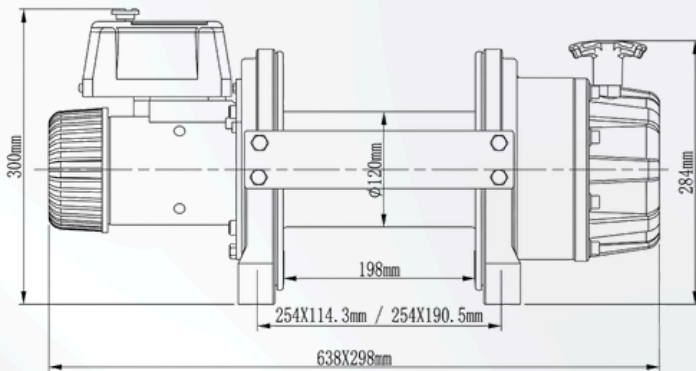

24V DC PERFORMANCE SPECS (first layer)

Line Pull	Line Speed	Motor	Pull by layer:
Lbs.(kgs)	Ft/min. (M/min.)	Current	layer/Lbs.(kgs)
0	30349.9)	23amps	1/23000(11340)
5000(2266)	11.1 (2.4)	90amps	2/20724(9460)
10000(4536)	8.2 (3.3)	140amps	3/17698(8027)
15000(8504)	6.6 (2.0)	180amps	4/15444(7005)
20000(0072)	5.2 (1.6)	230amps	
25000(11340)	5.2 (1.2)	280amps	