




Unmatched Precision and Clarity with the FXM Series LED Display

The **FXM Series** features ready-to-use panels with high precision, vivid displays, and durable construction, ideal for dynamic visual experiences.

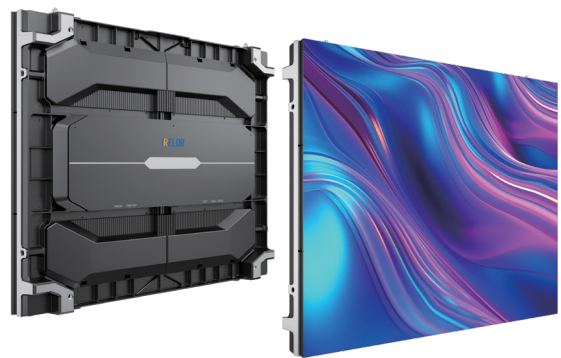

Ready-to-Use
Panel



Vivid
Performance




Diversified
Installation



Full Front and Rear
Maintenance


Ready-to-use panel

- ✓ Precision die-casting aluminum cabinet
- ✓ Branded PSU & receiving card
- ✓ The screen flatness is better
- ✓ All accessories with superior quality

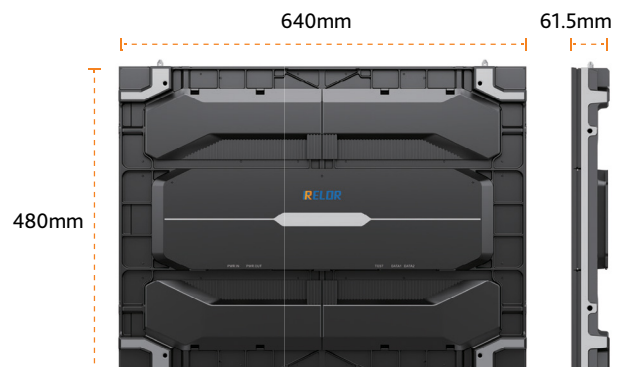


Vivid performance

This display offers a 3840 high refresh rate, eliminating scan lines in photos and supporting high grayscale at low brightness to achieve true-to-nature colors.

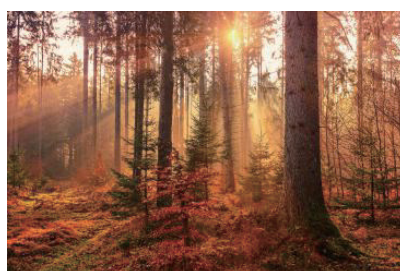

3840 high refresh rate (Pictures taken without scanning lines)

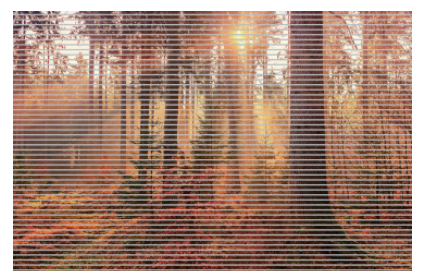

Low refresh rate (Pictures taken with scanning lines)

Installation & Maintenance

- ✓ Support wall-mounting, hanging and stacking installation
- ✓ Support full front and rear maintenance of module, PSU and receiving card




Wall-mounted installation



Hanging installation



Stacking installation




Front & rear maintenance

Application Scenario



Enterprise

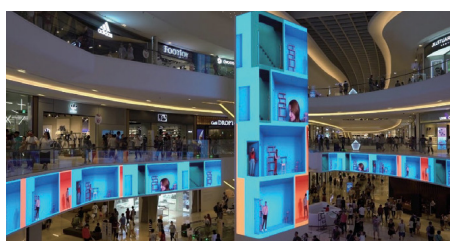

Retail



Others

Specifications

Model	F1.2M	F1.5M
LED type	Black SMD1010	Black SMD1212
Pixel pitch	1.25	1.53
Panel dimensions (W*H*D, mm)	640x480x61.5	640x480x61.5
Pixel Per Panel	512x384	416x312
Panel Weight (kg)	7.7	7.7
Module size (W*H, mm)	320x160	320x160
Brightness (nit)	500	500
Refresh rate (Hz)	3840	3840
Grayscale (bit)	14	14
Contrast ratio	3000:1	3000:1
Color temperature (K)	8300	8300
Viewing angle (H/V, °)	150/130	160/140
Drive mode	1/64	1/52
AC operating voltage (V)	100~240	100~240
Power consumption (max./avg., W/m²)	390/130	385/128
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21
Certification	FCC, ETL, CE, RoHS	FCC, ETL, CE, RoHS