

SHARP

Be Original.

Sharp PN-LC2 Series
Intelligent Touch Board with AV Sound Bar
PN-LC652 / PN-LC752 / PN-LC862 + PN-ZCMS1



Special Collaboration Bundle

Sharp offers a special business line that perfectly meets the requirements of any office environment such as meetings and conference room in addition to training spaces. Sharp's **INTELLIGENT TOUCH BOARD** enhances meetings and communications, making them smoother and more productive.

The bundle includes the Sharp **PN-LC2 Series UHD Intelligent Touch Board** and the **PN-ZCMS1 AV Soundbar** system, providing swift, collaborative advantages to the hybrid meeting rooms of today.

Sharp PN-ZCMS1 AV Soundbar

A universal all-in-one soundbar providing seamless and user-friendly unified communication.

Bundle includes:

- Sharp PN-LC2 Series Intelligent Touch Board (PN-LC652 / PN-LC752 / PN-LC862)
- PN-ZCMS1 AV Soundbar
- Floor Stand*
- Windows OPS*
- Wall Mount*

* Optional compatible accessories



Sharp PN-LC2 Series UHD Intelligent Touch Board

Intuitive UI

including customisable compass to set your preferred shortcuts

Pre-installed apps

whiteboard, wireless screen sharing and browser

eShare*

mirror from your device to the display and back from the display to multiple devices

* Also supporting native AirPlay and Chromecast.

Productivity tool

To support your presentations and discussions

Zero-Bonding

for more accurate touch response

Overlay mode

annotate over any source

User comfort

blue-light filter & Universal Colour Design

USB-C

BYOM with up to 65W charging

Intel® OPS slot

for enhanced computing power

HDMI-out

to present content to a larger canvas

Buttons & ports at the front

for easy access

Front facing speakers

for clear and directed sound

The **PN-LC2** range of Intelligent Touch Boards combines genuine 4K Ultra-HD resolution and an intuitive "Pen-on-Paper" user experience. The single USB-C connector makes it so simple to walk into a room, plug in your device and start working together straightaway. The PN-LC2 Intelligent Touch Boards also feature an integrated controller with whiteboard, overlay and wireless functionality to help enhance your productivity.

The PN-LC2 range of large format Intelligent Touch Boards is available in a choice of 86" class, 75" class, and 65" class screen sizes.

The open architecture design of the Sharp PN-LC2 Intelligent Touch Boards provides exceptional flexibility and freedom of use, so it can meet the demands of even the most challenging corporate environments. You can easily connect to various types of PC sources with its USB-C, HDMI, and VGA connectors. This allows you to display almost any type of content with a 4K resolution, or select any type of 4K video content from a media player using the CEC HDMI output. In addition, it has the latest high-speed, high-bandwidth USB-C port, which can be used for multiple functions and has a rotationally symmetrical design, so there is no connection confusion.

Key Features: PN-LC862 / LC752 / LC652

- ▶ 86 / 75 / 65-inch in sizes
- ▶ 3,840 × 2,160 pixels resolution
- ▶ IR (infrared blocking detection method)
- ▶ Accurate touch response with zero bonding
- ▶ 20 Point Multi Touch
- ▶ 15W + 15W
- ▶ Built-in controller for PC-less operation
- ▶ Universal OPS Slot

What you can do

- ▶ Write on the screen with your finger or a pen, and erase
- ▶ Touch the screen to navigate through documents, videos, presentations, or websites
- ▶ Make notes, draw shapes, move, scale, or rotate the images with a finger touch
- ▶ Save your notes, graphs, text, e-mail, or share them
- ▶ Record instructions as video files and post the materials for review by attendees*

* These functions are available with the appropriate optional software.





Sharp PN-ZCMS1 AV Soundbar



Full room coverage - with 120° field of view the 12 MP built-in camera ensures everyone is seen in the room

High-quality sound - 6 array microphone picks up voice firmly and cancels echos to ensure clear audio even in larger rooms

Focus on the presenter - intelligent face detection and voice localization tracks whoever is speaking and smoothly switches between presenters

Quick meeting start-up - save up to two camera presets and switch between presets using the remote control

100% compatibility and enhanced feature-set - in combination with Sharp displays

Easy installation - mount on top of your Sharp display or directly to the wall using the wall mount bracket

Key Features:

- ▶ Full room coverage – with 120° field of view.
- ▶ Resolution 3840 x 2160.
- ▶ Built-in 6 array microphone.
- ▶ Up to 8 meters pick-up range.
- ▶ High quality sound.
- ▶ Focus on the presenter.
- ▶ Quick meeting start-up.
- ▶ Easy installation.
- ▶ Privacy cover.

Compatible Accessories (Optional):

Floor Stand



Key Features:

- Universal in design to fit 65" to 98" displays
- The Floor stand can hold weight up to 120 kg
- Convenient curved design to withstand weight without shaking
- Sleek, sturdy and seamless performance
- Quick and easy installation
- VESA compliant
- Optional Equipment Tray

Open Pluggable Specification (OPS)



Key Features:

- Single cable-less connector
- Intel Core i5 or i7 processor
- Windows 11 PRO
- 4K video capable
- WiFi & Bluetooth

Wall Mount



Key Features:

- Easy levelling and installation
- For the heaviest displays
- Self-centering display bolts
- Locked service position


Specifications - PN-LC2 Series

Model		PN-LC862	PN-LC752	PN-LC652
Installation		Landscape		
LCD Panel		86" Class (85- ⁹ / ₁₆ " diagonal) TFT LCD	75" Class (74- ¹ / ₂ " diagonal) TFT LCD	65" Class (64- ¹ / ₂ " diagonal) TFT LCD
	Max. Resolution	3,840 × 2,160 pixels		
	Max. Display Colours	1.07 billion colours (approx.)		
	Pixel Pitch (H x V)	0.494 mm (H) × 0.494 mm (V)	0.430 mm (H) × 0.430 mm (V)	0.372 mm (H) × 0.372 mm (V)
	Brightness* ¹	450 cd/m ²		
	Contrast Ratio	1,200 : 1		
	Viewing Angle (H/V)* ²	178°/178° (CR ≥ 10)		
	Active Screen Area (W x H)	74- ⁵ / ₈ " x 41- ¹⁵ / ₁₆ "	64- ¹⁵ / ₁₆ " x 36- ⁹ / ₁₆ "	56- ¹ / ₄ " x 31- ⁵ / ₈ "
	Response Time	8 ms (grey to grey, avg.)		
	Backlight	LED, direct lit		
Touch Screen	Touch Technology	IR (Infrared blocking detection method) with zero-bonding technology		
	PC Connection Port	USB (3.0 compliant) (Type B) x 2 (Front x 1, Rear x 1)		
	Power Supply	Supplied from main unit		
	Multi Touch	20 points		
	Protection Glass	Thickness: Approx. 3.2 mm Shock resistance: 130 cm* ³		
Touch Pen	Function Button	Dual-sided passive pen x2		
Input Terminals* ⁴	Front	HDMI (HDCP2.3 compatible, CEC compatible) x 1		
	Rear	HDMI (HDCP2.3 compatible, CEC compatible) x 2, USB Type-C (DisplayPort 1.2 Alt mode, HDCP 2.3, USB Power Delivery 65W compatible, Touch signal, USB pass through) x 1, Display Port (DisplayPort 1.2, HDCP compatible) x 1, Mini D-sub 15-pin x 1, AV mini jack x 1, 3.5 mm-diameter mini stereo jack x 1		
	System	Front	USB 3.0 TypeA x 2, USB 3.0 TypeB (for touch) x 1	
		Rear	USB 3.0 TypeA x 2, USB 3.0 TypeB (for touch) x 1, LAN port (10Base-T/100Base-TX/1000BASE-T) x 1, RS-232C IN x 1	
Output Terminals** (Rear)		HDMI x 1, 3.5 mm-diameter mini stereo jack x 1, S/PDIF x 1		
System	CPU	Arm® Cortex® - A55 processor (quad core)		
	Memory	4GB		
	Internal Storage	16GB		
	Wireless LAN	IEEE802.11ac/n/a/g/b (Use Wireless USB Adaptor)		
Expansion Slot		OPS Slot (19 V, 4.74 A, 90 W)		
Built-in Speakers		15 W + 15 W w/front facing speakers		
Mounting		4 points, 800 x 600 mm pitch, M8 screw	4 points, 800 x 400 mm pitch, M8 screw	4 points, 600 x 400 mm pitch, M8 screw
Power Supply* ⁵		100V – 240 V AC, 50/60 Hz		
Power Consumption (Factory Setting (Shipment) / Max rating)		260 W / 500 W	200 W / 420 W	180 W / 390 W
Environmental Conditions	Operating emperature* ⁶	5°C to 35°C		
	Operating Humidity* ⁷	20% to 80% RH (no condensation)		
Dimensions (W x D x H) (approx.)		1967.9 x 87.1 x 1170.2mm	1,722.5 x 87.1 x 1,032.1mm	1,511.6 x 85.9 x 917.9mm
Weight (approx.)		65 kg	51 kg	38.5 kg
Bezel width		21.9 mm (Left, Right, Top) , 53.2 mm (Bottom)		
Main Accessories		AC power cord, remote control unit, remote control unit battery (AAA size) x 2, set-up manual, blank sticker, cable clamp x 3,USB cable, pen tray, touch pen x 2, Wireless Adapter		


*¹ Without Glass. Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness. *² excluding the touch sensor part around the LCD panel. *³ Approximate distance at which the glass panel can withstand the impact of a 500-gram iron ball dropped on its center. *⁴ Use a commercially available connection cable for which the glass panel can withstand the impact of a 500-gram iron ball dropped on its center. *⁵ The AC power cord is an inlet type. The cable is bundled (3 pins). *⁶ Temperature conditions may change when using the monitor together with the optional equipment. In such cases, check the temperature conditions specified by the optional equipment. *⁷ Check the requirements of the computer and other devices to be connected, and make sure that all requirements are satisfied.

Dimensions - Inch (mm) - PN-LC2 Series


PN-LC862

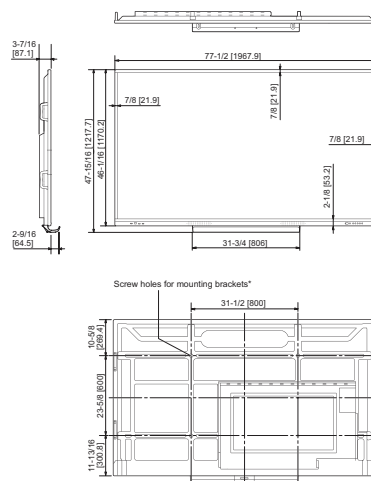

PN-LC752

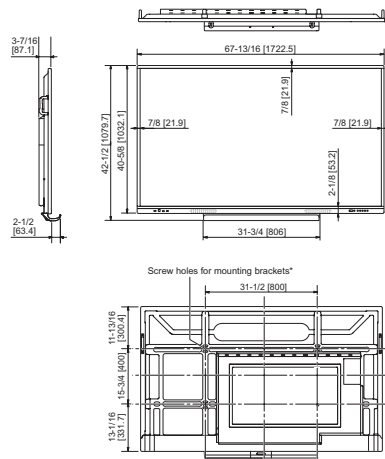

PN-LC652

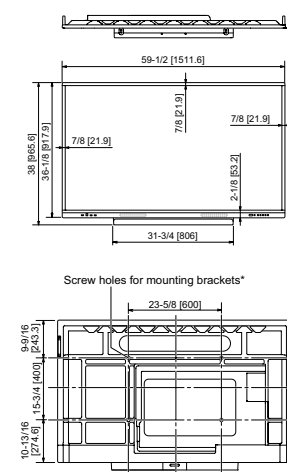

Specifications - PN-ZCMS1 AV Soundbar



Camera	Pixels	12MP
	Field of View	120°
	Zoom	Max. 5 times
	Resolution	Max. 3,840 x 2,160
	Adjustable Angle	Up 15°, Down 15° (manual)
Microphone	Voice Pickup Range	8 meters
	Mic Array	6 Elements

Speaker	Output Power	8 watts
Dimensions (W x H x D) [mm]		462 x 93 x 76 (excluding protrusions)
Mounting		Wall installation via supplied brackets
Shipping content		AV Soundbar, remote control, wall mount bracket, power cord (AC adapter), USB type-C to type-A cable, lens cap, screws, operation manual.

Design & specifications are subject to change without prior notice
Version 1.1, July 2024

SHARP

SHARP Middle East FZE P.O.Box 17115 Dubai, Jebel Ali Free Zone, United Arab Emirates
Phone: +971 4 8815311 Fax: +971 4 8816692, e-Mail: bsdmarketing@smef.sharp-world.com

www.sharpmear.com