


Micro-EC3: “ESP32-C3 WROOM 02” WiFi/Bluetooth Microcontroller Dev Board

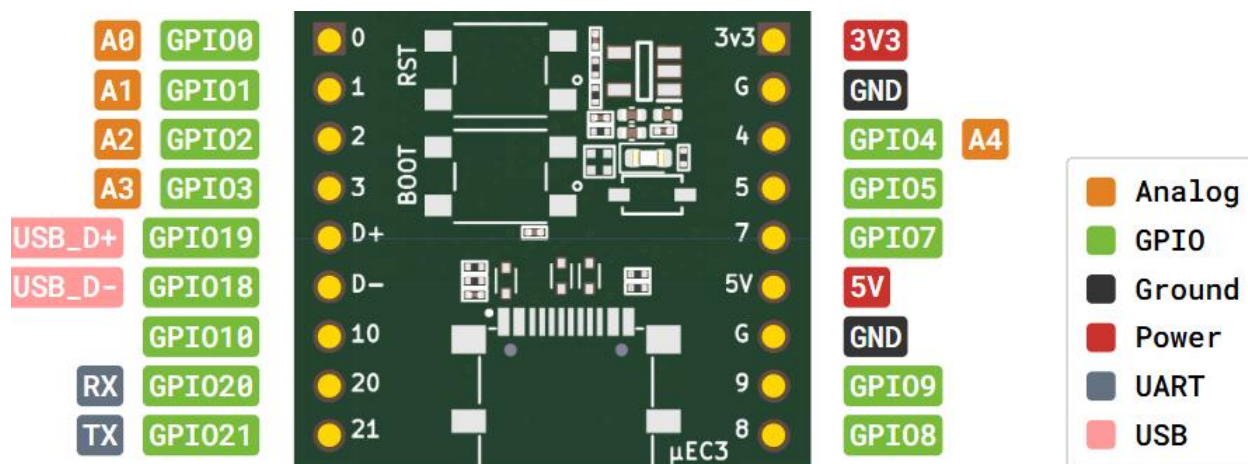

Module: *ESP32-C3 WROOM 02 module*

Applications: Low power IOT sensing, Wearables

Datasheet: documentation.espressif.com/esp32-c3-wroom-02_datasheet_en.pdf

Note: Any GPIO can be configured as I2C, I2S, PWM, UART and TWAI pins. GPIO 6 is configured as an onboard blink LED. GPIO 9 is configured as BOOT Pin with onboard 10K pull-up. GPIO18, 19 are dedicated USB data pins. GPIO20, 21 are UART RX and TX pins.

Specifications:

Board dimension	2.7 x 2.4 cm (Tiny coin sized)
Processor	32-bit single core RISC V microprocessor with max frequency 160 MHz
ROM/SRAM	384 KB ROM/400 KB SRAM on-chip
Flash Memory	4 MB
Wireless Communication	2.4 GHz Wi-Fi (802.11b/g/n), Bluetooth 5.0 (Bluetooth Low Energy)
IO Pins	14 GPIO pins, 5V power pin and 3.3V LDO output pin exposed.
Interface support	I2C, I2S, SPI, 12-bit ADC - 5 Inputs/2 channels, PWM, UART
Built-in LEDs	GPIO6 for control/blink LED. Separate LED is included for power indication
Antenna	On-board PCB antenna
USB Programming	USB-C port with native USB programming
Switches	On-board BOOT and RESET buttons

