

# Swimming through shell buckling

A DISSERTATION PRESENTED  
BY  
ADEL DJELLOULI  
TO  
THE DEPARTMENT OF PHYSICS

IN PARTIAL FULFILLMENT OF THE REQUIREMENTS  
FOR THE DEGREE OF  
DOCTOR OF PHILOSOPHY  
IN THE SUBJECT OF  
APPLIED PHYSICS

UNIVERSITY OF GRENOBLE ALPES  
GRENOBLE, FRANCE  
APRIL 2017

©2014 – ADEL DJELLOULI  
ALL RIGHTS RESERVED.

## Swimming through shell buckling

### ABSTRACT

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Morbi commodo, ipsum sed pharetra gravida, orci magna rhoncus neque, id pulvinar odio lorem non turpis. Nullam sit amet enim. Suspendisse id velit vitae ligula volutpat condimentum. Aliquam erat volutpat. Sed quis velit. Nulla facilisi. Nulla libero. Vivamus pharetra posuere sapien. Nam consectetur. Sed aliquam, nunc eget euismod ullamcorper, lectus nunc ullamcorper orci, fermentum bibendum enim nibh eget ipsum. Donec porttitor ligula eu dolor. Maecenas vitae nulla consequat libero cursus venenatis. Nam magna enim, accumsan eu, blandit sed, blandit a, eros.

Quisque facilisis erat a dui. Nam malesuada ornare dolor. Cras gravida, diam sit amet rhoncus ornare, erat elit consectetur erat, id egestas pede nibh eget odio. Proin tincidunt, velit vel porta elementum, magna diam molestie sapien, non aliquet massa pede eu diam. Aliquam iaculis. Fusce et ipsum et nulla tristique facilisis. Donec eget sem sit amet ligula viverra gravida. Etiam vehicula urna vel turpis. Suspendisse sagittis ante a urna. Morbi a est quis orci consequat rutrum. Nullam egestas feugiat felis. Integer adipiscing semper ligula. Nunc molestie, nisl sit amet cursus convallis, sapien lectus pretium metus, vitae pretium enim wisi id lectus. Donec vestibulum. Etiam vel nibh. Nulla facilisi. Mauris pharetra. Donec augue. Fusce ultrices, neque id dignissim ultrices, tellus mauris dictum elit, vel lacinia enim metus eu nunc.

# Contents

o	MATERIALS AND METHODS	I
o.1	Shell fabrication . . . . .	I
o.2	Spring experiment . . . . .	13
	APPENDIX A SOME EXTRA STUFF	28
	REFERENCES	32

THIS IS THE DEDICATION.

# Acknowledgments

LOREM IPSUM DOLOR SIT AMET, consectetur adipiscing elit. Morbi commodo, ipsum sed pharetra gravida, orci magna rhoncus neque, id pulvinar odio lorem non turpis. Nullam sit amet enim. Suspendisse id velit vitae ligula volutpat condimentum. Aliquam erat volutpat. Sed quis velit. Nulla facilisi. Nulla libero. Vivamus pharetra posuere sapien. Nam consectetur. Sed aliquam, nunc eget euismod ullamcorper, lectus nunc ullamcorper orci, fermentum bibendum enim nibh eget ipsum. Donec porttitor ligula eu dolor. Maecenas vitae nulla consequat libero cursus venenatis. Nam magna enim, accumsan eu, blandit sed, blandit a, eros.

*The Secret of Happiness lies in looking at all the wonders of the world and  
never forgetting the two drops of oil in the spoon.*

The alchemist, Paulo Coelho

O

## Materials and methods

### 0.1 SHELL FABRICATION

#### 0.1.1 MOTIVATIONS

This study requires a full control over the geometry, the material and the manufacturing process to ensure the reproducibility of the experiments.

Further more, two constraints were to take into account: the ability to induce the buckling

within a pressure range of -1 bar and 1 bar and the ability to apply several cycles without damaging the shell.

This implies that the material to be used needs to have a high tensile strength to withstand the deformation cycle without entering the plastic domain and a rigidity small enough to trigger a buckling in the imposed pressure range and a feasible ( $\frac{d}{R}$ ) range i.e  $d > 1mm$  and  $R < 50mm$ . Visco-elastic polymers called elastomers qualify to these prerequisites and have been chosen for the shell manufacturing.

Before deciding to manufacture spherical hollow shells, we tried different kind of commercial "balls". It was not conclusive because the process of fabrication was not intended to be reproducible in terms of material composition, thickness or diameter. This is why it was decided to manufacture them.

Several techniques were considered to manufacture polymer-based spherical hollow shells, including 3D-printing, rotational molding, processes involving high-pressure vulcanization. These techniques would have required either buying expensive equipments or subcontracting to a company with inconveniences of time delay, loss of control over the process and expensive cost of prototyping. The most suitable solution was the more common bi-molding process where the two halves of an object are cast and then assembled. The main advantages being the cost and the low-time consumption, plus a total control over the process, which includes the choice of materials, the reproducibility and more freedom over the geometry.



### 0.1.2 MOLDING EQUIPMENTS

**FEMALE MOLD:** It consists of a cylinder of radius  $R_{cylinder} = 30mm$  hollowed out to produce a half a sphere imprint of radius  $R_{out} = 25mm$  and a height of  $h = 30mm$  (see fig.1). The concavity is where the casting material is poured. A groove was added to store any potential material surplus. Two female molds are necessary for the casting operation.

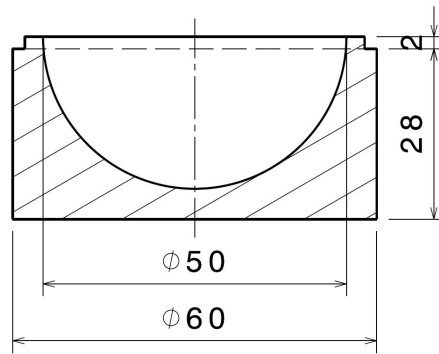


Figure 1: Longitudinal section of the female mold

**TRANSLATION GUIDE SLEEVE:** It is a hollow cylinder with an inner radius  $R_{in} = R_{cylinder} = 30mm$ , and a thickness of  $5mm$ . where the female mold is slid in. It is slightly higher than the female mold by  $5mm$ . One extremity is provided with an inner chamfer of  $5$  which ensures the concentricity between the female mold and the male mold.


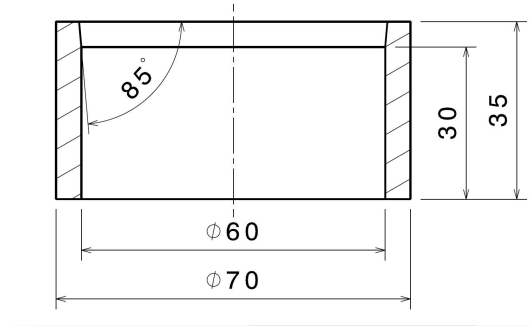


Figure 2: longitudinal section of the sleeve

MALE MOLD: Figure 3 shows the design of the male mold which consists of half a sphere of radius  $R_{int} < R_{out}$ , which is changed to cast different thicknesses. It is supplied with a shouldering which acts as a travel stop, its flanks have a slight angle of 5 providing a translation guide and preventing an over-center locking in combination with the guiding sleeve previously presented. The cylindrical part over the shouldering helps manipulating the mold during the casting process. Three radii have been used:  $R_{int} = 18.5mm, 20mm, 23mm$ . \*

---

\*All the molding parts presented are made of Aluminum "Fortal". The female and male molds were machined using a CNC (computerized numerical control) machine and with a precision of  $tol = \pm 0.01mm$ . The surface roughness obtained was of  $R_a = 0.04$  which indicates a very good finishing. This choice of manufacturing was unavoidable since no other alternative could produce spherical shapes with such precision conditions.

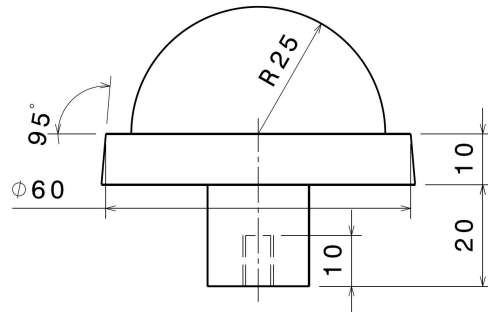

**Figure 3: longitudinal section of the male mold**

**GLUING SLEEVE:** It is a hollow cylinder with an inner radius  $R_{in} = R_{cylinder} = 30mm$ , a thickness of  $5mm$  and a height of  $50mm$ . It is used during the gluing process to ensure the concentricity of the two halves of the sphere contained in the female molds which face each other.

**MECHANICAL PRESS:** It's a simple press consisting of two metallic plates supplied with a set of threaded rods and hexagonal nuts used to apply pressure over female/male molds during the casting step to prevent bubbles from appearing during the casting step. It is also used during the gluing step on the female/female molds to ensure the contact between the two half spheres to be glued together.

**PASTA MACHINE:** This machine (fig4) consists on two rotating cylinders, with an adjustable inter-space which allows to produce layers with the desired thickness.



Figure 4: Pasta maker

### 0.1.3 MATERIALS AND PROTOCOLS

Three materials were used in the experiments done during the study: "Dragon Skin®30" which has a specific molding protocol and AJO 121 and AJO 122 which have a common molding protocol.

#### DRAGON SKIN®30

This material is typically used to make special effects. In the case of our study, it was used to investigate the effect of the  $\frac{d}{R}$  on the swimming mechanism. Its exact chemical constitution is not known, but what can be said is that it is a cure liquid silicone compound, which consists of two liquid components named A and B. Component A represents the silicon polymer chains with eventually the presence of fillers to enhance its mechanical properties. Component B is the cross-linking agent providing bonds that link one polymer chain to another, decreasing the flexibility of the polymer chain and increasing its rigidity. Mixing these two components at room temperature, it creates a solid that takes the shape of the container it was poured in. The typical mechanical properties of the resulting rubber are:

- Shore A Hardness : 30
- Specific gravity : 1.08
- 100% elastic modulus : 0.6 MPa
- Elongation at break : 364%
- cure time (at room temperature) : 16 hours

## HALF SHELL CASTING

1. Begin by determining the mass of a shell with a outer radius of  $R_{out} = 50mm$  and a thickness  $th$  which gives an internal radius  $R_{int} = R_{out} - th$ , The mass\* of a hollow sphere is given by the following formula:

$$Mass_{shell} = \frac{4\pi}{3} \rho_{material} (R_{out}^3 - R_{int}^3)$$

2. In a beaker, we weigh 50% of the shell mass of component A which is the silicon polymer chain. We stir thoroughly and add 50% of the shell mass of component B, which constitutes the cross-linking agent, we stir thoroughly.
3. The mixture is then degassed thanks to a vacuum pump.
4. The female and male are cleaned using acetone and 50% of the degassed mixture is poured in the two female molds.
5. We degas again to make sure no air was entrapped during the previous step.
6. Each female mold is slid in the translation guide sleeve and the male mold corresponding to the desired  $R_{int}$  is gently slid inside the female mold to prevent air from getting trapped.
7. The female-male molds assembly is then pressed and locked using the press.<sup>†</sup>
8. The press is then put into an oven at 65°C to speed up the cross-linking process reducing it from 16 hours to only 20 minutes.

HALF SPHERES GLUING: Once the two halves of a hollow sphere of the desired  $R_{int}$  are cast. We need to glue the two halves together to obtain a complete hollow sphere of thickness  $th$ . This part is critical: if the sewing is weak, it will tear apart during the buckling phase. if the sewing is thick, it

---

\*In practice, this mass is increased by 50% to take into account the eventual loss during the preparation.

<sup>†</sup>This step is necessary to ensure that no bubbles get trapped during the assembly.

means that the shape is no longer spherical. If the gluing material is not the same, we lose the homogeneity of the material and potentially create a weak zone at the sewing, which would accelerate the weakening of this zone and ultimately tear apart.

To efficiently glue the two halves and avoid the problems stated previously. We used the same material to perform the gluing, but for that it was necessary to decrease the viscosity of the mixture and enhance its wetting properties. For this purpose, we mixed "Pentane" which is an organic solvent<sup>†</sup> with a solubility parameter similar to that of PDMS. The following describes the protocol of gluing:

1. Prepare 10g of a mixture A+B of the Dragon skin<sup>®</sup>30 and degas it.
2. Add 5 ml of "Pentane" to the mixture and stir to obtain a diluted mixture that is neither too liquid nor too viscous and pump the resulting liquid inside a syringe.
3. Use an abrasive such as sandpaper over the gluing area of the two halves casts to make the surface rougher.
4. Put back each cast in the female mold and align it correctly so that the gluing area is horizontal.
5. Pour uniformly a layer of the diluted mixture using the syringe needle on the gluing area of both casts.
6. Put one female mold inside the gluing sleeve, facing upward then slide the second one facing downward until the two gluing areas are in contact.
7. Ensure the contact by using the mechanical press and let the cross-linking happen at room temperature for 16 hours.\*
8. After the curing time, remove the residual thin skin circling around the sewing area.

---

\*This time we don't use the oven to ensure that the pressure inside the spherical hollow shell is the atmospheric pressure.

## AJO<sub>121</sub>/122

The two remaining materials *AJO 121* and *AJO 122* were samples kindly supplied by "BLUESTAR silicones®". Both are hot curing silicone rubbers after addition of a vulcanization agent. The typical applications of these materials are: molding and injection molding process for technical parts (sealing gaskets, grommets), extrusion profiles (windows profiles, sleeves, tubes) and calendaring operations for manufactured hoses. They were chosen to investigate the effect of solid dissipation characterized by the rebound resilience property. This pair of materials present the particularity of sharing the same elastic energy storage capacity characterized by the elastic modulus. In the case of the samples provided by "BLUESTAR silicones®", both materials present a soft white paste-like texture. The exact chemical composition of the pastes were not disclosed but what we know is that the curing agent, which is 1.25 % of 2,4-dichlorobenzoyl peroxide, was already mixed with the silicone polymer. The vulcanization process is temperature-controlled and is induced at 115°C.

The typical mechanical properties of the resulting rubbers are:

- 100% elastic modulus AJO<sub>121</sub> / AJO<sub>122</sub> : 2.2 MPa / 2.3 MPa
- Rebound resilience AJO<sub>121</sub> / AJO<sub>122</sub> : 45% / 65%
- Shore A AJO<sub>121</sub> / AJO<sub>122</sub> : 60 / 59
- Specific gravity : 1.16
- Elongation at break AJO<sub>121</sub> / AJO<sub>122</sub> : 560% / 366%
- cure time (at 115°C) : 10 minutes



#### HALF SHELL CASTING:

1. Begin by determining the mass of a shell with a outer radius of  $R_{out} = 50mm$  and a thickness  $th$  which gives an internal radius  $R_{int} = R_{out} - th$ , The mass of a hollow sphere is given by the following formula:

$$Mass_{shell} = \frac{4\pi}{3} \rho_{material} (R_{out}^3 - R_{int}^3)$$

2. Weight the calculated mass from the paste and divide it in two equal parts.
3. Press each part at the center of the female mold.
4. Each female mold is slid in the translation guide sleeve and the male mold corresponding to the desired  $R_{int}$  is slid inside the female mold.
5. The female-male molds assembly is then pressed and locked using the press.
6. The press is then put into an oven at  $115^{\circ}C$  to trigger the vulcanization process, during 8 minutes<sup>\*</sup>.
7. A post-curing at  $200^{\circ}C$  is needed to optimize the mechanical properties of the material, to evaporate remaining volatile substances (sub-products linked to the peroxide) and allow the sublimation of the 2,4 Dichlorobenzoic acid which manifests as a white powder at the surface of the material, at the end of the previous step.

HALF SPHERES GLUING: The gluing using the AJO materials was very challenging for different reasons. First, the paste-like nature of the material which was not soluble in any organic solvent without compromising the vulcanization agent already mixed with the raw polymer. It also made manipulating it harder, contrary to the liquid nature of the "Dragon Skin<sup>®</sup>30". Second, we were not able to glue together two flat surfaces, due to the fact that the cross-linking process reached a

---

<sup>\*</sup>This period was reduced to 8 minutes instead of 10 minutes to avoid reaching the maximum of the cross-linking, in order to complete the gluing

maximum with the prescribed time and temperature and no biding was possible afterward. This is the protocol followed which solved partially the problems previously stated:

1. Prepare two thin layers (0.1 mm) using the "pasta maker" machine. Adjust their width to 10 mm and the length to  $2\pi R_{out} \approx 157mm$ .
2. Use an abrasive such as sandpaper over the gluing area of the two halves casts to make the surface rougher.
3. Put back one cast in the female mold and align it correctly so that the gluing area is horizontal.
4. Put uniformly a first layer on the gluing area of one cast and make sure it adhered to the surface, cut the residual width using a scalpel.
5. Connect the remaining half (without the female mold) with the first and press to get and adhesion.
6. Put one female mold inside the gluing sleeve, facing upward then slide the second one facing downward until the two gluing areas are in contact.
7. Remove the female mold gently and roll the second layer around the sewing perimeter, taking care not to disconnect the two halves while doing so.
8. Encapsulate the shell inside the two female molds and exert pressure using the mechanical press.
9. Put the press inside the oven at 115°C for 10 minutes. Remove it and let it cool at room temperature.\*

---

\*The capsules produced using this protocol have an internal pressure close to 75% of the atmospheric pressure.

## 0.2 SPRING EXPERIMENT

### 0.2.1 BRIEF INTRODUCTION AND MOTIVES

The purpose of this experiment is to quantify the thrust generated during the buckling and unbuckling phases when the pressure cycle is imposed externally, using a force sensor. The advantages of this method is that all the forces that are involved can be quantified using the recording images of the experiment. To do so, the capsule is attached to a spring and immersed in a tank filled with a Newtonian liquid characterized with a density  $\rho$  and a viscosity  $\mu$ . The spring plays the role of a force sensor and prevents the spherical shell from floating to the surface due to buoyancy effects.

The buckling spot is directed in the vertical direction, to get a 1-D displacement<sup>\*</sup>. Pressure cycles are applied by pressurizing the air above the liquid in which the shell is immersed. Figure 5 is a representation of the spring experiment.

---

<sup>\*</sup>In theory, the buckling can happen anywhere on the capsule. In practice, the buckling happens at the same spot if the boundary conditions are not changed. This is due to the presence of a weakness in the material which decides of the buckling spot.

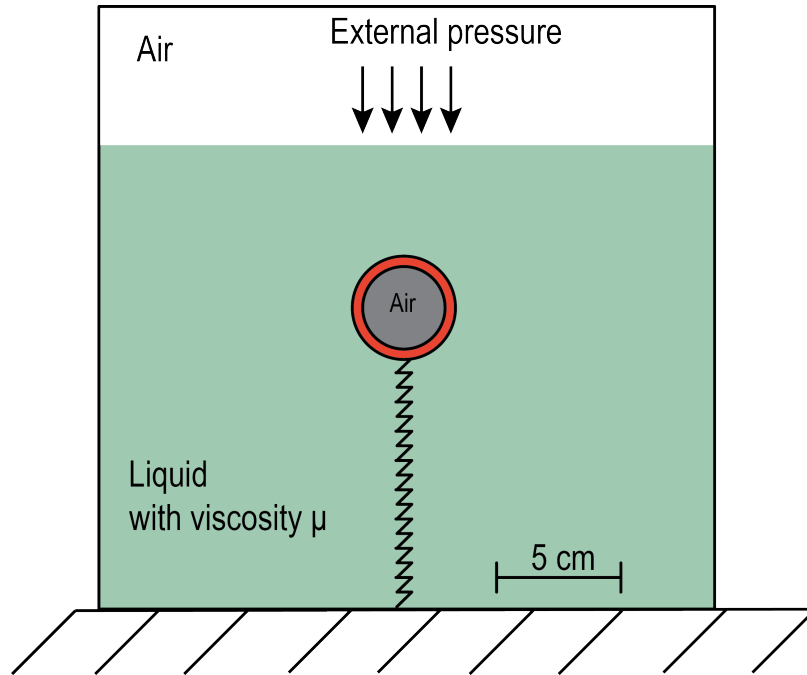


Figure 5: Schematics of the spring experiment

### 0.2.2 EQUIPMENT

#### TANK

It consists of a cubic tank (see fig.6) made of anodized Aluminum supplied with windows made of polycarbonate polymer. It is dimensioned to withstand an absolute pressure bigger than  $310^5 Pa$ . Its dimensions are consistent with the non-confinement conditions (CITATION) where the characteristic length of the container is close to 10 times the characteristic length of the object to be studied.

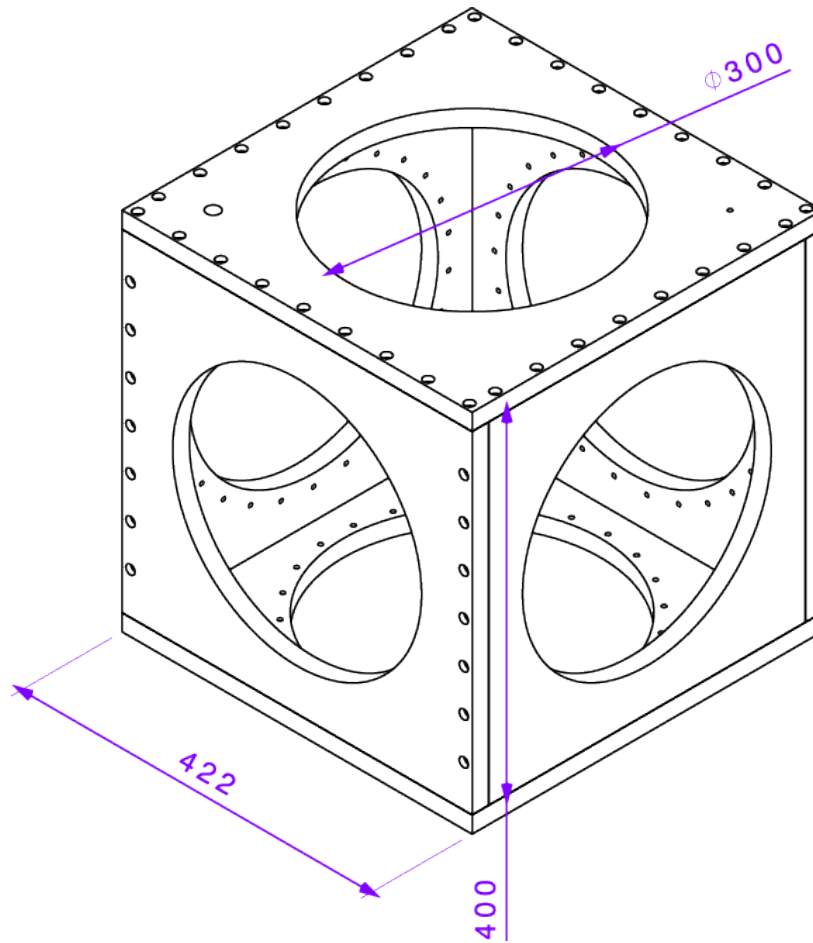


Figure 6: Schematics of the pressurizeable tank

## SPRING

As described earlier, the spring is used as a force sensor. The spring also allows to keep the spherical shell immersed in the liquid. At rest, its elongation is directly proportional to the force  $F_{measured} = K\Delta x$ , where  $k$  is the stiffness coefficient.

In the case of our study, the spring is solicited in traction. Taking into account that the outer radius for all the capsules studied was fixed at 50 mm and that the buoyancy force is significantly larger than the weight, only one spring stiffness was needed to carry out the experiment. The spring was dimensioned to have a total length of 200 mm at rest in water. Knowing that after the buckling, the equilibrium state reached is lower due the decrease in volume (by  $\approx 20\%$ , determined by preliminary results), a constraint was added to avoid the case where the spring rings would be in contact with each other which would bias the force measurement.

The characteristics provided by the manufacturer concerning the spring used in this experiment are:

- Stiffness coefficient : 7 N/m
- Length at rest : 100 mm
- Material : EN 10270-3 stainless steel
- Wire diameter : 0.5 mm
- External diameter: 7.93 mm

It was also provided with threaded ends to fit M6 and M4 screws. The M6 end is designed to link the spring to a fixed base at the bottom of the tank. The M4 end is designed to support a suction cup provided with a M4 screw. This suction cup is used to attach the spherical capsule to the spring.

## SPHERICAL SHELLS

The spherical shells used in this experiment are shells cast in the 'Dragon skin ®30' material. The external radius is kept constant at 5 cm and three thicknesses were explored: 2 mm, 5 mm and 6.5

mm. The choice of these thicknesses is primarily directed by the fact that we wanted to explore the effect of stored elastic energy on the buckling mechanism and the thrust induced during the deflation and the re-inflation of the capsule. Taking into account that the stored elastic energy before the advent of the buckling instability is proportional to the ratio between the thickness and the shell radius squared<sup>2</sup>  $P_c \propto (\frac{d}{R})^2$ , the resulting range of variation of this geometric ratio in this experiment, ranges from  $6.410^{-3}$  to  $6.7610^{-2}$ . A lower value of this parameter was tried (taking a thickness of 1 mm) but it resulted in a spontaneous buckling when immersed, due to the static pressure. A higher value of of this parameter was tried (taking a thickness of 7.5 mm) but it was not possible to reach the pressure high enough to produce a buckling in the range of the operable pressure  $[0, 2]$  bars.

Special measure were taken to conduct experiments on the 2mm thick shell, due to the fact that once attached to the suction cup that ensures the link with the spring, the shell gets deformed at the attaching point by buoyancy effects which lower locally the curvature radius, creating a weak spot<sup>2</sup>. An imperfection was introduced at the casting, by reducing locally the thickness of the shell. Practically, the shell thickness was reduced of 0.1 mm over a circular surface with a 10 mm diameter.

One of the properties of the material used is its semi-transparency when light is shone on it. which is an important feature to determine the volume of the concave shapes resulting after the buckling.

## PRESSURE CONTROLLER

Since deflation and re-inflation cycles of the shell are actuated by applying a difference of pressure between the inside and outside, it was necessary to use a pressure controller.

A pressure controller is not an air compressor, it needs a high pressure input. The user sets the pressure wanted using a piece of software which in turn, communicates with the hardware assigning the desired command. The pressure controller then, opens its valves and regulates the in/out air flux until the desired pressure is reached, using a pressure sensor which measures a relative pressure to the reference: the room atmospheric pressure.

The equipment used during this experiment is the OBI flow control system manufactured by Elveflow®. This system is supplied with four channels (fig.7), three channels operate between 0 and 2bars (relative pressure) and one channel operates between -1 and 1 bar and requires a vacuum pump to reach -1 bar. In the spring experiment, the external pressure is the control parameter, therefore only a 0-2 bar channel was used. As stated earlier, a pressure source is necessary to be able to use the "OBI" pressure controller, and in this case a 6 bar pressure source is used.

The pressure is controlled thanks to a very user-friendly interface, which allows to apply different kind of pressure signals such as: constant, ramp, sinusoidal, square signals. It also allows programming sequences using the previously stated signals, but also wait time, triggers and loops. This particular function was helpful to implement reproducible pressure cycles during the spring experiment.



To ensure the proper functioning of the pressure controller, two air filters were used: one upstream, to filter the air between the pressured air supply and the "OBi" and one downstream to filter the air between the "OBi" and the tank, where liquid vapor can affect the equipments of the "OBi" during the pressure regulation phase. The air filters used consist in a  $5\mu\text{m}$  pore size pneumatic filter which removes liquid and solid contaminants. It is supplied with drain that can be opened as needed to drain condensed contaminants.



**Figure 7: OB1 pressure controller**

**NOTES** This pressure controller is not supposed to be used in such conditions, operating on rather large air volumes. One of its inconveniences was its time response with a max air-flux dimensioned for micro-fluidic experiments. We bought a pressure controller intended to work with large volumes but it was not supplied with neither any power supply nor any software and necessary electronics to control it with a computer. The fact that we were not investigating the actuation frequency role in the physics and the impossibility to control negative relative pressures, comforted us into using the plug and play solution "OBi".

## CAMERA,LENSES AND LIGHT SOURCES

**CAMERA:** Taking into account the fast nature of the instability, where the shells undertakes a deformation of almost a radius, in less than 5 ms, it was necessary to use a high-speed camera. The camera used for this purpose is the Phantom©Miro 310, its main characteristics are the following:

- Resolution: One megapixel, 1280x800.
- Full resolution speed: 3260 frame per second (FPS).
- Sensor: CMOS sensor with 20  $\mu\text{m}$  pixel size, 12-bit depth gray-scale colors.
- Memory: 6GB, with 2.3 seconds record time at maximum frame rate.
- Communication: Gb Ethernet for control and data.

It is supplied with a software which allows the control of these parameters and also triggering and storing images.

**LENSES:** A lens with high iris opening value is necessary to capture images at high speed with low light exposure. It was necessary to capture a large field which contains an object of 50 mm plus part of a spring which moves during the process. This is why a fixed focal length  $f = 50 \text{ mm}$  with a maximum aperture of  $f/1.4$  was selected, from the lens manufacturer Zeiss©.

**LIGHT SOURCE:** Three parameters were to take into account for the choice of light sources:

1. A stable source of light with no variation of light intensity was required to be able to use the 2D image registration algorithm "UnwrapJ" to correct the deformation of the tank windows due to pressure.

2. A powerful intensity is required to be able to record at high speed.
3. A homogenous light source is needed to be able to correctly extract the edges of the shell from the images.

To do so, two 30x30 daylight balanced led-based panels were used providing 6560 lumen, disposed as shown in figure 8. The one at the back is tuned at full power to highlight the complete ball-spring system and a filter is added to diffuse light and avoid seeing the individual leds. The one upfront is used with 25% of its power, in order to see the concavity, once the shell is buckled.

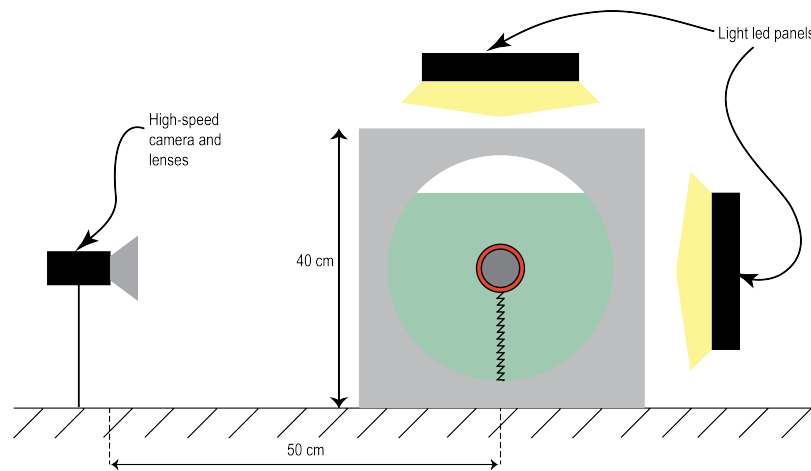


Figure 8: Representation of the light and camera disposition

### 0.2.3 EXPERIMENTAL PROCESS

#### 1-D ORIENTATION

Theoretically, the buckling instability nucleates randomly on the surface of the shell. Practically, this instability always occurs at a specific spot of the elastic shell which represent its weak spot, when the boundary conditions are not changed <sup>\*</sup>.

To properly conduct a force measurement, using a spring, it is necessary to align the buckling spot in the spring axis to obtain a 1-D displacement. To do so, a series of preliminary experiments are conducted to determine precisely the buckling spot: First, mark the shell surface with 12 distinctive symbols, then put the marked ball inside the tank and apply a pressure to induce the buckling instability. Once buckled, define the closest symbol to the concavity center resulting from the buckling. Link the shell to the suction cup fixed on the spring, in a way to have the buckling spot aligned to the spring and mark the position of the guessed buckling spot and the attaching area and pressurize the the tank to trigger the buckling again. Measure the angle between the spring axis and the concavity and repeat the operation until a 90° angle is achieved.

This step also allows to determine the critical pressure at which the buckling and unbuckling occur.

---

<sup>\*</sup>Experimentally, when the shell is in contact of a wall, the buckling spot occurs at the contact point, due to some change in the shell stress.

## EXPERIMENTAL PROTOCOL

We used three fluids in this experiment, and in each fluid, three capsules were investigated 0.2.2.

The main characteristics of the fluids used are shown in table 1. The following experimental protocol is applied for each fluid.

Fluid	Density ( $\text{Kg.m}^{-3}$ )	Viscosity (Pa.s)
Glycerol	1250	1.37
Water	1000	$10^{-3}$
Air	1.2	$10^{-6}$

**Table 1: Fluids used in the experiments and their main properties at room temperature.**

**QUASI-STATIC EXPERIMENTS:** We noticed, during the first experiments done with the spring that the shape of a shell submitted to a constant pressure  $P$ , continues to slightly evolve in time due to the relaxation of the material through creep. To investigate this effect, quasi-static experiments were conducted by submitting the shell to a pressure cycle which evolves at a slow rate. Practically, a step-like cycle was applied knowing the buckling and unbuckling critical pressures.


Figure 9 shows a qualitative example of such step-like cycle where the step width represents the amount of time waited at each pressure step<sup>\*</sup>. First, an image is recorded at ( $P=0$ ), then the pressure is increased by a pressure step and is kept constant during a time  $T = \text{stepwidth}$ , at the end of this time an image is recorded. This process is repeated until nearing the pressure at which the buckling occurs which can slightly vary from an experiment to another, the pressure is then gradually increased by smaller steps<sup>†</sup> and when arriving to a critical pressure where the buckling occurs, the

---

<sup>\*</sup>by varying this step width, we can evaluate its importance and how it impacts the instability dynamics

<sup>†</sup>The smaller steps are necessary in order to keep the pressure constant at the buckling and unbuckling

camera is triggered and a movie is recorded at 5000 FPS<sup>\*</sup>. An image is taken at the end of the buckling phase, in order to record the state to which the capsule has relaxed to, following the buckling. The pressure is decreased following the same procedure until nearing the critical pressure at which the unbuckling occurs and the same procedure is followed for the buckling phase. After that, the pressure is decreased until reaching zero. This protocol is performed for each step width, and there are 2 of them: 10 minutes and 1 minute. 10 minutes, represents the time after which the final state of relaxation is reached and any change that might occur cannot be perceived within our experimental precision. This limit is specific to the material used. The 1 minute time was added to measure the rate at which this relaxation happens.

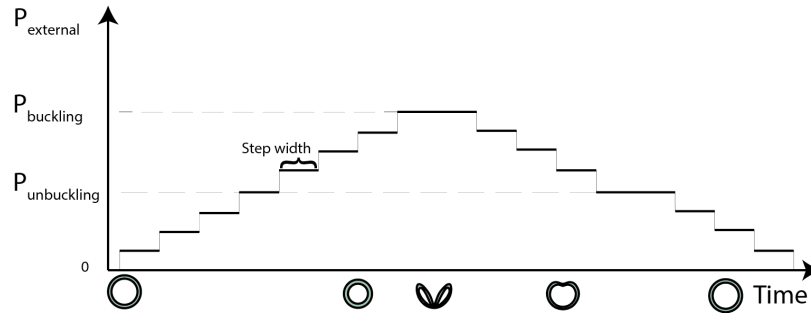

**Figure 9: Qualitative representation of pressure cycles applied for the quasi-static experiments**

**DYNAMIC EXPERIMENTS:** In the second set of experiments, step width is shortened to 20 seconds<sup>†</sup>, and a similar cycle is applied with the exception of the phase between buckling phase and the unbuckling phase where the depressurization rate was varied, to investigate the production of phases, to independently study the buckling and unbuckling dynamics.

<sup>\*</sup>Figure 9 shows a longer time at the buckling and unbuckling phases to count for the time necessary to save the resulting movies, which takes about 8 minutes

<sup>†</sup>Time necessary to save images to the computer

thrust during the rolling. Figure 9 shows a qualitative example of a pressure cycle applied for the dynamic set of experiments. The parameter  $\alpha$  corresponds to the depressurization rate to get from the buckling pressure to near the unbuckling pressure. Three different rates are applied.

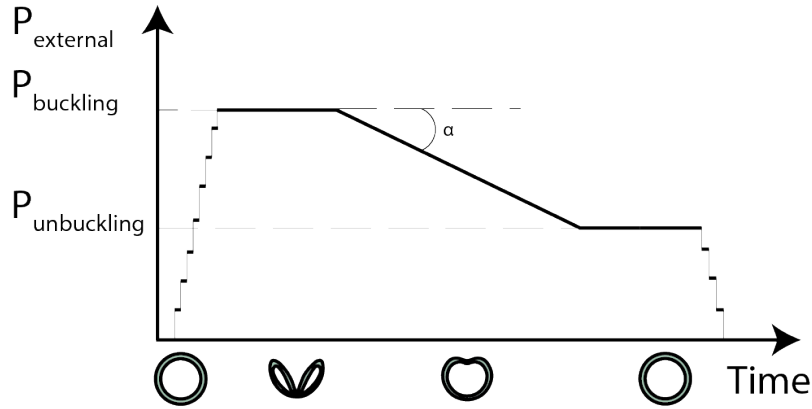


Figure 10: Qualitative representation of pressure cycles applied for the dynamic experiments

The fluid temperature is measured at the beginning of the pressure cycle and at its end. These temperature measurements are then, used to properly characterize the viscosity of the medium, by taking a sample and perform rheological measurements, thanks to a rheometer.

The tables 2,3 and 4 summarize the control parameters of the pressure cycle for each  $\frac{d}{R}$ , in each fluid.

Capsules	Buckling pressure (mbar)	Unbuckling pressure (mbar)	Depressurization rates (mbar.s <sup>-1</sup> )	Temperature (Celsius)
$\frac{d}{R} =$	100	[70,80]	-1, -10, -20	[20,21.5]
$\frac{d}{R} =$	[780,790]	[380,390]	-1, -10, -15	[24.5,26]
$\frac{d}{R} =$	[1350,1450]	[620,660]	100 mbar steps, -1, -10	[25,26]

Table 2: Experimental pressure cycle parameters in glycerol


Capsules	Buckling pressure (mbar)	Unbuckling pressure (mbar)	Depressurization rates (mbar.s <sup>-1</sup> )	Temperature (Celsius)
$\frac{d}{R} =$	[100,110]	[75,85]	-1, -10, -20	[23,23.5]
$\frac{d}{R} =$	780	[360,370]	-1, -10, -20	[20,23.2]
$\frac{d}{R} =$	Experiments were not possible due to the non visibility of the buckling concavity in water.			

**Table 3: Experimental pressure cycle parameters in water**

Capsules	Buckling pressure (mbar)	Unbuckling pressure (mbar)	Depressurization rates (mbar.s <sup>-1</sup> )	Temperature (Celsius)
$\frac{d}{R} =$	[100,110]	[70,80]	-1, -1, -2	[23.5,25]
$\frac{d}{R} =$	[850,900]	[380,480]	-1,-2,-2.5	[24.5,26]
$\frac{d}{R} =$	1570	790	-1	23

**Table 4: Experimental pressure cycle parameters in air**

**DISTORTION CORRECTION:** When static pressure is applied inside the tank used for the experiment, its windows made out of polycarbonate bend. This bending creates a sort of a barrel distortion which depends on the pressure applied inside the tank (fig.11). This distortion alters the images recorded during the experiment and ultimately any distance measurements extracted from them.

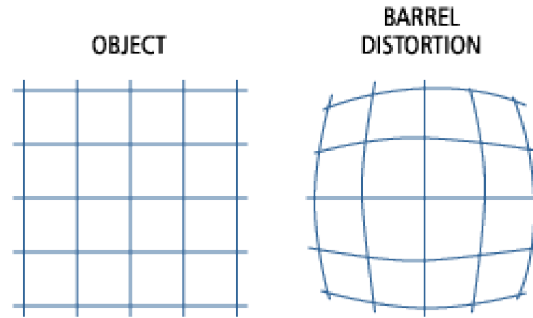

**Figure 11: Qualitative representation of a barrel distortion**

Two possibilities to correct this effect were considered: either modeling the bent window as a lens and characterize it as function of the pressure, or applying a numerical method to find the deformation of the image between the rest state where the relative pressure is zero and a state at pressure P. Once found, this deformation matrix is inversed and we can transform a distorted image to a



non-distorted one. The latter solution was adopted, because it is less time-consuming knowing an algorithm has already been implemented in ImageJ registration plugin called "bUnwraJ". To calibrate the correction, a damier was placed at the same position as the spring-ball system, and images were recorded for each pressure step, used during experiments in one fluid\*.

---

\*This operation is renewed each time we fill the tank with a new fluid, because the camera-tank position may change during the emptying phase



## Some extra stuff

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Morbi commodo, ipsum sed pharetra gravida, orci magna rhoncus neque, id pulvinar odio lorem non turpis. Nullam sit amet enim. Suspendisse id velit vitae ligula volutpat condimentum. Aliquam erat volutpat. Sed quis velit. Nulla facilisi. Nulla libero. Vivamus pharetra posuere sapien. Nam consectetur. Sed aliquam, nunc eget euismod ullamcorper, lectus nunc ullamcorper orci, fermentum bibendum enim nibh eget ip-

sum. Donec porttitor ligula eu dolor. Maecenas vitae nulla consequat libero cursus venenatis. Nam magna enim, accumsan eu, blandit sed, blandit a, eros.

Quisque facilisis erat a dui. Nam malesuada ornare dolor. Cras gravida, diam sit amet rhoncus ornare, erat elit consectetur erat, id egestas pede nibh eget odio. Proin tincidunt, velit vel porta elementum, magna diam molestie sapien, non aliquet massa pede eu diam. Aliquam iaculis. Fusce et ipsum et nulla tristique facilisis. Donec eget sem sit amet ligula viverra gravida. Etiam vehicula urna vel turpis. Suspendisse sagittis ante a urna. Morbi a est quis orci consequat rutrum. Nullam egestas feugiat felis. Integer adipiscing semper ligula. Nunc molestie, nisl sit amet cursus convallis, sapien lectus pretium metus, vitae pretium enim wisi id lectus. Donec vestibulum. Etiam vel nibh. Nulla facilisi. Mauris pharetra. Donec augue. Fusce ultrices, neque id dignissim ultrices, tellus mauris dictum elit, vel lacinia enim metus eu nunc.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Vestibulum tortor quam, feugiat vitae, ultricies eget, tempor sit amet, ante. Donec eu libero sit amet quam egestas semper. Aenean ultricies mi vitae est. Mauris placerat eleifend leo. Quisque sit amet est et sapien ullamcorper pharetra. Vestibulum erat wisi, condimentum sed, commodo vitae, ornare sit amet, wisi. Aenean fermentum, elit eget tincidunt condimentum, eros ipsum rutrum orci, sagittis tempus lacus enim ac dui. Donec non enim in turpis pulvinar facilisis. Ut felis.

Cras sed ante. Phasellus in massa. Curabitur dolor eros, gravida et, hendrerit ac, cursus non, massa. Aliquam lorem. In hac habitasse platea dictumst. Cras eu mauris. Quisque lacus. Donec ipsum. Nullam vitae sem at nunc pharetra ultricies. Vivamus elit eros, ullamcorper a, adipiscing sit amet, porttitor ut, nibh. Maecenas adipiscing mollis massa. Nunc ut dui eget nulla venenatis ali-

quet. Sed luctus posuere justo. Cras vehicula varius turpis. Vivamus eros metus, tristique sit amet, molestie dignissim, malesuada et, urna.

Cras dictum. Maecenas ut turpis. In vitae erat ac orci dignissim eleifend. Nunc quis justo. Sed vel ipsum in purus tincidunt pharetra. Sed pulvinar, felis id consectetur malesuada, enim nisl mattis elit, a facilisis tortor nibh quis leo. Sed augue lacus, pretium vitae, molestie eget, rhoncus quis, elit. Donec in augue. Fusce orci wisi, ornare id, mollis vel, lacinia vel, massa.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Morbi commodo, ipsum sed pharetra gravida, orci magna rhoncus neque, id pulvinar odio lorem non turpis. Nullam sit amet enim. Suspendisse id velit vitae ligula volutpat condimentum. Aliquam erat volutpat. Sed quis velit. Nulla facilisi. Nulla libero. Vivamus pharetra posuere sapien. Nam consectetur. Sed aliquam, nunc eget euismod ullamcorper, lectus nunc ullamcorper orci, fermentum bibendum enim nibh eget ipsum. Donec porttitor ligula eu dolor. Maecenas vitae nulla consequat libero cursus venenatis. Nam magna enim, accumsan eu, blandit sed, blandit a, eros.

Quisque facilisis erat a dui. Nam malesuada ornare dolor. Cras gravida, diam sit amet rhoncus ornare, erat elit consectetur erat, id egestas pede nibh eget odio. Proin tincidunt, velit vel porta elementum, magna diam molestie sapien, non aliquet massa pede eu diam. Aliquam iaculis. Fusce et ipsum et nulla tristique facilisis. Donec eget sem sit amet ligula viverra gravida. Etiam vehicula urna vel turpis. Suspendisse sagittis ante a urna. Morbi a est quis orci consequat rutrum. Nullam egestas feugiat felis. Integer adipiscing semper ligula. Nunc molestie, nisl sit amet cursus convallis, sapien lectus pretium metus, vitae pretium enim wisi id lectus. Donec vestibulum. Etiam vel nibh. Nulla facilisi. Mauris pharetra. Donec augue. Fusce ultrices, neque id dignissim ultrices, tellus mauris

dictum elit, vel lacinia enim metus eu nunc.

## References

- [1] Lee, J. N., Park, C., & Whitesides, G. M. (2003). Solvent compatibility of poly(dimethylsiloxane)-based microfluidic devices. *Analytical Chemistry*, 75(23), 6544–6554.
- [2] Marmottant, P., Bouakaz, A., Jong, N. D., & Quilliet, C. (2011). Buckling resistance of solid shell bubbles with ultrasound. *Journal of Acoustical Society of America*, 129, 1231–1239.



**T**HIS THESIS WAS TYPESET using  $\text{\LaTeX}$ , originally developed by Leslie Lamport and based on Donald Knuth's  $\text{\TeX}$ .

The body text is set in 11 point Egenolff-Berner Garamond, a revival of Claude Garamont's humanist typeface. The above illustration, *Science Experiment 02*, was created by Ben Schlitter and released under [CC BY-NC-ND 3.0](#). A template that can be used to format a PhD dissertation with this look & feel has been released under the permissive AGPL license, and can be found online at [github.com/suchow/Dissertate](https://github.com/suchow/Dissertate) or from its lead author, Jordan Suchow, at [suchow@post.harvard.edu](mailto:suchow@post.harvard.edu).