

MXSTM32CubeMX Untitled\*: STM32F103C8Tx

STM32CubeMX

FileWindowHelpmyST

HomeSTM32F103C8TxUntitled - Pinout & ConfigurationGENERATE CODE

Pinout & ConfigurationClock ConfigurationProject ManagerTools

Software PacksPinout

CategoriesA-Z

SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity

CAN

I2C1

I2C2

SPI1

SPI2

TIM3 Mode and Configuration

Mode

Slave ModeDisable

Trigger SourceDisable

Internal Clock

Channel1Disable

Configuration

Reset Configuration

NVIC Settings

DMA Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC...3999

Counter ModeUp

Counter Period ...999

Internal Clock D...No Division

auto-reload prel...Disable

> Trigger Output (TRGO) ...

Pinout viewSystem view

RCC\_OSC\_IN

RCC\_OSC\_OUT

GPIO\_Ip1pt

GPIO\_Ip1pt

GPIO\_Ip1pt

GPIO\_Op1pt

SYS\_JTCK-SWCLK

SYS\_JTMS-SWDIO

DC2\_SCL

DC2\_SDA

VDD

VSS

PA9

PA8

BOOT

PA7

PA6

PA5

PA4

PA3

PA2

PA1

PA0

VDDA

VSSA

NRST

PD1

PD0

PC15

PC14

PC13

VBAT

STM32F103C8Tx

LQFP48

تم المسح الضوئي بـ CamScanner

### TIM3 Mode and Configuration

## Mode

Slave Mode **Disable** ▼

Trigger Source Disable 

☒ Internal Clock

Channel1 Disable

## Configuration

## Reset Configuration

 **NMC Settings**

### Parameter Settings

DMA Settings


- ✔ User Constants

## NVIC Interrupt Table

Enabled

Preemption Prior

TIM3 global interrupt ☒ 0

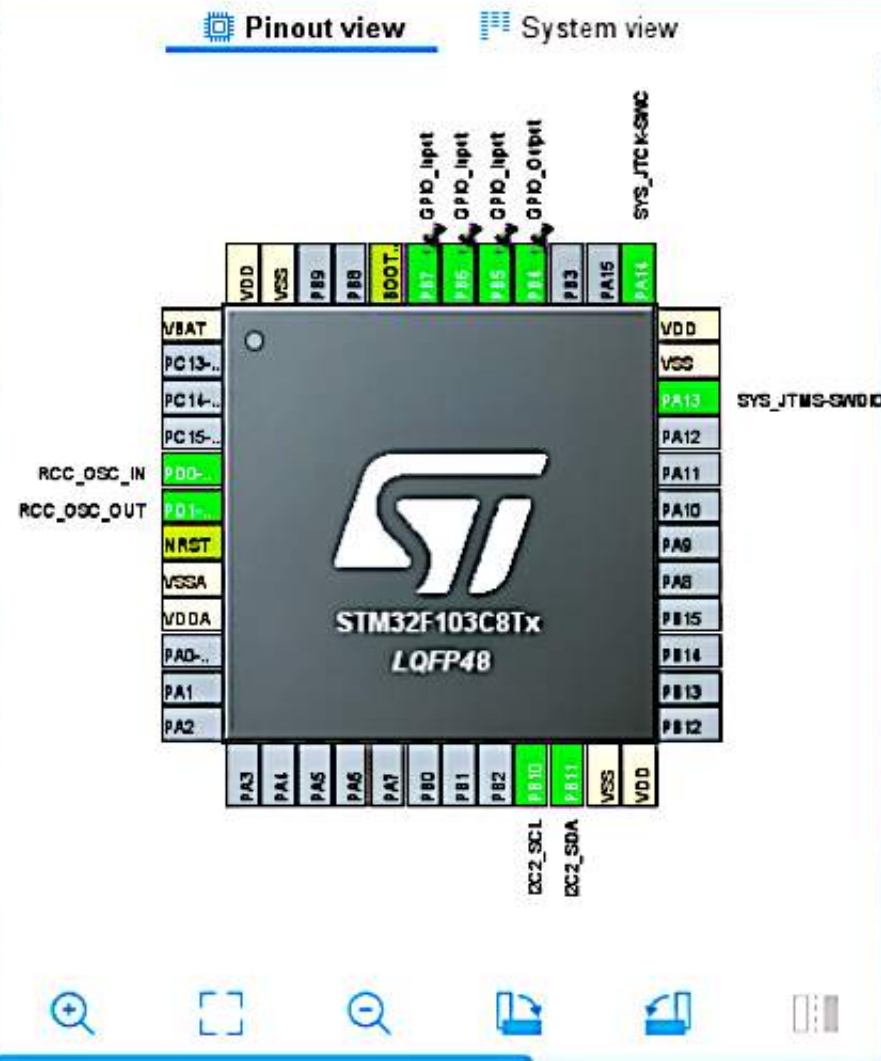

STM32CubeMX

FileWindowHelp

myST

HomeSTM32F103C8TxUntitled - Pinout & ConfigurationGENERATE CODE

Pinout & ConfigurationClock ConfigurationProject ManagerTools

Software PacksPinout

Search

CategoriesA-Z

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity

CAN

I2C1

I2C2

SPI1

SPI2

USART1

USART2

USART3

USB

I2C2 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

DMA Settings

User Constants

Parameter Settings

GPIO Settings

NVIC Settings

Configure the below parameters :

Search (Ctrl+F)

Master Features

I2C Speed Mode Standard Mode

I2C Clock Spee... 100000

Slave Features

Clock No Stretc... Disabled

Primary Addres... 7-bit

Dual Address A... Disabled

Primary slave a... 0

General Call ad... Disabled

Pinout viewSystem view

RCC\_OSC\_IN

RCC\_OSC\_OUT

GPIO\_Ipin1

GPIO\_Ipin2

GPIO\_Ipin3

GPIO\_Opin1

SYS\_JTCK-SWCLK

SYS\_JTMS-SWDIO

I2C2\_SCL

I2C2\_SDA

STM32F103C8Tx

LQFP48

تم المسح الضوئي بـ CamScanner

MXSTM32CubeMX Untitled\*: STM32F103C8Tx

STM32CubeMX

FileWindowHelpmyST

HomeSTM32F103C8TxUntitled - Pinout & ConfigurationGENERATE CODE

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software PacksPinout

Search

CategoriesA-Z

System Core

- DMA
- GPIO**
- IWDG
- NVIC
- RCC**
- SYS**
- WWDG

Analog>

Timers

- RTC
- TIM1
- TIM2
- TIM3**
- TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO

I2C

RCC

SYS

Search Signals

Search (Ctrl+F)

Show only Modified Pins

| P... | Sign... | GPI... | GPI...  | GPI...  | Maxi... | User... | Modi... |
|------|---------|--------|---------|---------|---------|---------|---------|
| PB4  | n/a     | Low    | Out...  | No p... | Low     |         |         |
| PB5  | n/a     | n/a    | Inpu... | Pull-up | n/a     |         |         |
| PB6  | n/a     | n/a    | Inpu... | Pull-up | n/a     |         |         |
| PB7  | n/a     | n/a    | Inpu... | Pull-up | n/a     |         |         |

Select Pins from table to configure them. Multiple sele

Pinout viewSystem view

RCC\_OSC\_IN

RCC\_OSC\_OUT

GPIO\_0pin

GPIO\_1pin

GPIO\_2pin

GPIO\_3pin

SYS\_JTCSWING

SYS\_JTMS-SWDD

DC2\_SCL

DC2\_SDA

STM32F103C8TxLQFP48

تم المسح الضوئي بـ CamScanner