


CNET Lab 10

Network topology diagram

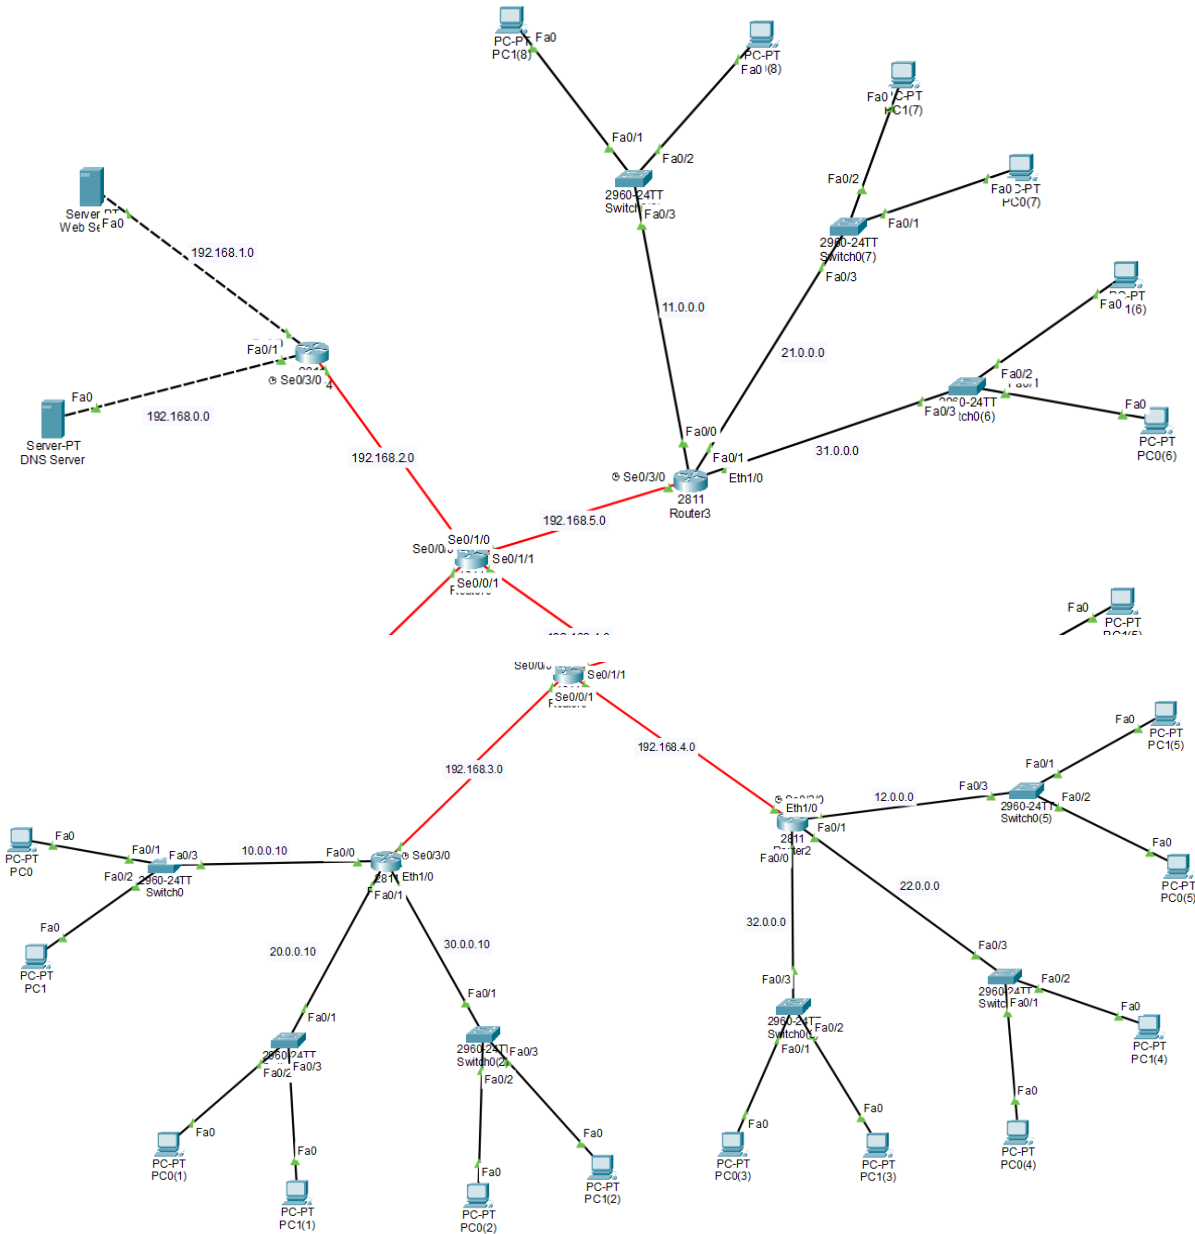

Router configurations

```
Router(config)#router rip
Router(config-router)#network 192.168.2.0
Router(config-router)#network 192.168.3.0
Router(config-router)#network 192.168.4.0
Router(config-router)#network 192.168.5.0
Router(config-router)#exit
```

Routing tables

Routing Table for Router4					Routing Table for Router2					Routing Table for Router3					Routing Table for Router0				
Type	Network	Port	Next Hop IP	Metric	Type	Network	Port	Next Hop IP	Metric	Type	Network	Port	Next Hop IP	Metric	Type	Network	Port	Next Hop IP	Metric
R	10.0.0.0/8	Serial0/3/0	192.168.2.2	120/2	R	10.0.0.0/8	Serial0/3/0	192.168.4.2	120/2	R	10.0.0.0/8	Serial0/3/0	192.168.5.2	120/2	R	10.0.0.0/8	Serial0/0/1	192.168.3.1	120/1
R	11.0.0.0/8	Serial0/3/0	192.168.2.2	120/2	R	11.0.0.0/8	Serial0/3/0	192.168.4.2	120/2	C	11.0.0.0/8	FastEthernet0/0	---	0/0	R	11.0.0.0/8	Serial0/1/0	192.168.5.1	120/1
R	12.0.0.0/8	Serial0/3/0	192.168.2.2	120/2	C	12.0.0.0/8	Ethernet1/0	---	0/0	L	11.0.0.10/32	FastEthernet0/0	---	0/0	R	12.0.0.0/8	Serial0/1/1	192.168.4.1	120/1
R	20.0.0.0/8	Serial0/3/0	192.168.2.2	120/2	L	12.0.0.10/32	Ethernet1/0	---	0/0	R	12.0.0.0/8	Serial0/3/0	192.168.5.2	120/2	R	20.0.0.0/8	Serial0/0/1	192.168.3.1	120/1
Routing Table for Router1					R	20.0.0.0/8	Serial0/3/0	192.168.4.2	120/2	R	20.0.0.0/8	Serial0/3/0	192.168.5.2	120/2	R	21.0.0.0/8	Serial0/1/0	192.168.5.1	120/1
Type	Network	Port	Next Hop IP	Metric	R	21.0.0.0/8	Serial0/3/0	192.168.4.2	120/2	C	21.0.0.0/8	FastEthernet0/1	---	0/0	R	22.0.0.0/8	Serial0/1/1	192.168.4.1	120/1
C	10.0.0.0/8	FastEthernet0/0	---	0/0	C	22.0.0.0/8	FastEthernet0/1	---	0/0	L	21.0.0.10/32	FastEthernet0/1	---	0/0	R	30.0.0.0/8	Serial0/0/1	192.168.3.1	120/1
L	10.0.0.10/32	FastEthernet0/0	---	0/0	L	22.0.0.10/32	FastEthernet0/1	---	0/0	R	22.0.0.0/8	Serial0/3/0	192.168.5.2	120/2	R	31.0.0.0/8	Serial0/1/0	192.168.5.1	120/1
R	11.0.0.0/8	Serial0/3/0	192.168.3.2	120/2	R	30.0.0.0/8	Serial0/3/0	192.168.4.2	120/2	R	30.0.0.0/8	Serial0/3/0	192.168.5.2	120/2	R	32.0.0.0/8	Serial0/1/1	192.168.4.1	120/1
R	12.0.0.0/8	Serial0/3/0	192.168.3.2	120/2	R	31.0.0.0/8	Serial0/3/0	192.168.4.2	120/2	C	31.0.0.0/8	Ethernet1/0	---	0/0	R	192.168.0.0/24	Serial0/0/0	192.168.2.1	120/1

Connectivity testing

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 21.0.0.1

Pinging 21.0.0.1 with 32 bytes of data:

Request timed out.
Reply from 21.0.0.1: bytes=32 time<1ms TTL=127
Reply from 21.0.0.1: bytes=32 time<1ms TTL=127
Reply from 21.0.0.1: bytes=32 time<1ms TTL=127

Ping statistics for 21.0.0.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 21.0.0.2

Pinging 21.0.0.2 with 32 bytes of data:

Reply from 21.0.0.2: bytes=32 time<1ms TTL=127
Reply from 21.0.0.2: bytes=32 time<1ms TTL=127
Reply from 21.0.0.2: bytes=32 time<1ms TTL=127
Reply from 21.0.0.2: bytes=32 time<1ms TTL=127

Ping statistics for 21.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 31.0.0.2

Pinging 31.0.0.2 with 32 bytes of data:

Request timed out.
Reply from 31.0.0.2: bytes=32 time<1ms TTL=127
Reply from 31.0.0.2: bytes=32 time=1ms TTL=127
Reply from 31.0.0.2: bytes=32 time=1ms TTL=127

Ping statistics for 31.0.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 31.0.0.1
```

Web server browse

