


CNET Lab 11

TASK 1:

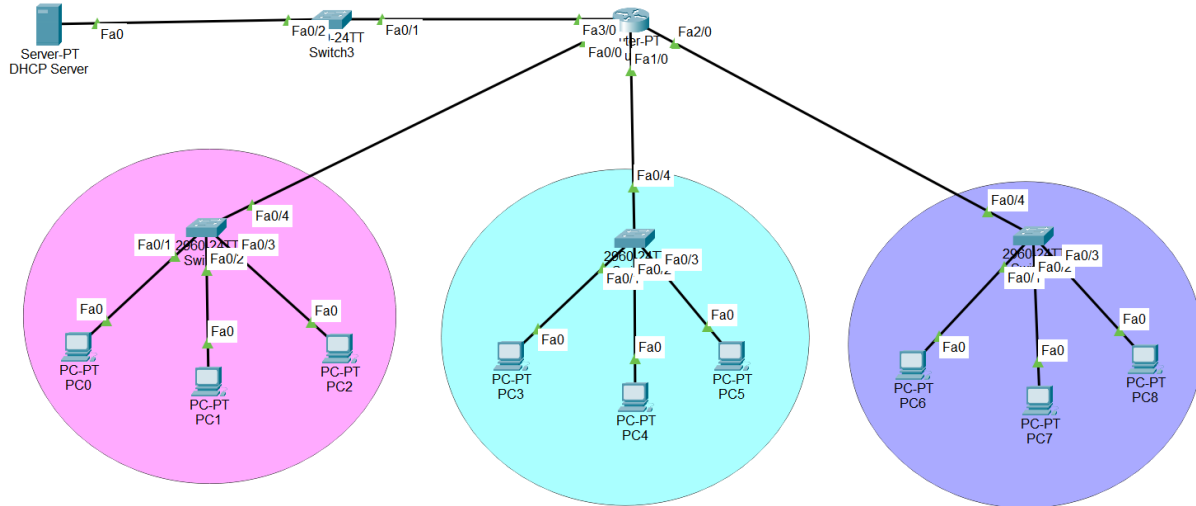

```
Router#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fa0/0
Router(config-if)#ip address 192.168.24.10 255.255.255.0
Router(config-if)#ip helper-address 192.168.23.69
Router(config-if)#exit
Router(config)#interface fa1/0
Router(config-if)#ip address 192.168.25.10 255.255.255.0
Router(config-if)#ip helper-address 192.168.23.69
Router(config-if)#exit
Router(config)#interface fa2/0
Router(config-if)#ip address 192.168.26.10 255.255.255.0
Router(config-if)#ip helper-address 192.168.23.69
Router(config-if)#exit
Router(config)#
```

PC0

Physical
 Config
 Desktop
 Programming
 Attributes

IP Configuration
 X

Interface
 FastEthernet0

IP Configuration

☒ DHCP
 ☐ Static
 DHCP request successful.

IPv4 Address
 192.168.24.12

Subnet Mask
 255.255.255.0

Default Gateway
 192.168.24.10

DNS Server
 0.0.0.0

IPv6 Configuration

☐ Automatic
 ☒ Static

IPv6 Address
 /

Link Local Address
 FE80::201:43FF:FE8A:5257

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication
 MD5


Username

Password

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC4	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC3	PC6	ICMP		0.000	N	1	(edit)	(delete)
	Successful	PC6	PC0	ICMP		0.000	N	2	(edit)	(delete)

Routing Table for Router0				
Type	Network	Port	Next Hop IP	Metric
C	192.168.23.0/24	FastEthernet3/0	---	0/0
C	192.168.24.0/24	FastEthernet0/0	---	0/0
C	192.168.25.0/24	FastEthernet1/0	---	0/0
C	192.168.26.0/24	FastEthernet2/0	---	0/0

TASK 2:

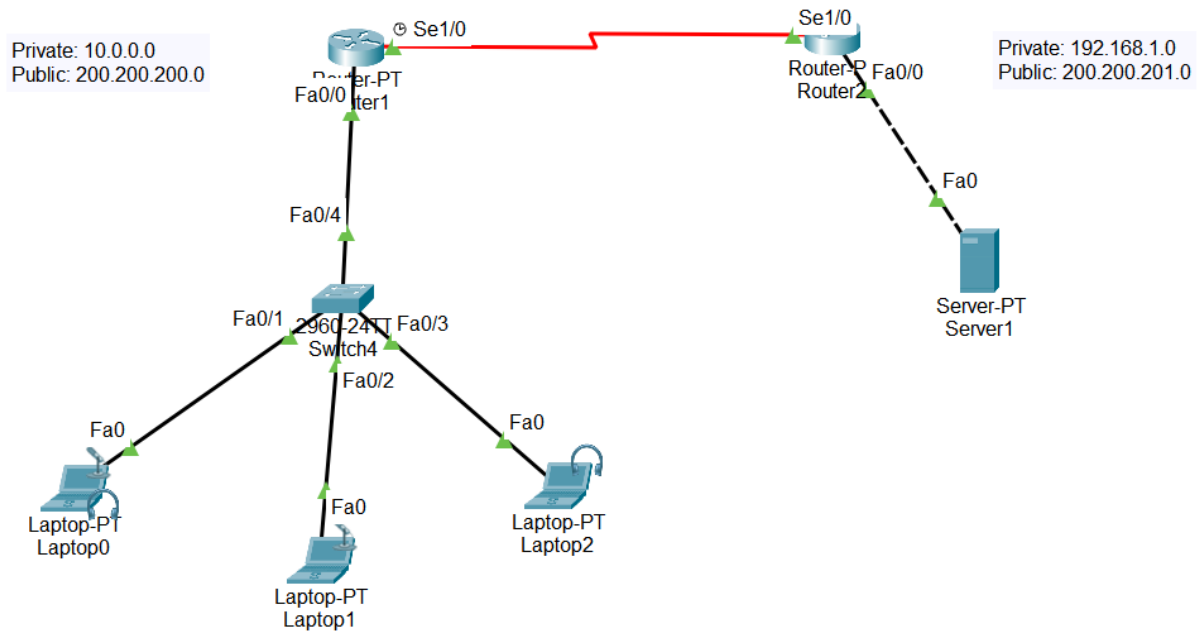

NAT Table for Router1					NAT Table for Router2				
Protocol	Inside Global	Inside Local	Outside Local	Outside Global	Protocol	Inside Global	Inside Local	Outside Local	Outside Global
---	200.200.200.1	10.0.0.10	---	---	---	200.200.201.1	192.168.1.10	---	---
---	200.200.200.2	10.0.0.20	---	---					
---	200.200.200.3	10.0.0.30	---	---					

Routing Table for Router1					Routing Table for Router2				
Type	Network	Port	Next Hop IP	Metric	Type	Network	Port	Next Hop IP	Metric
C	10.0.0.0/8	FastEthernet0/0	---	0/0	C	100.0.0.0/8	Serial1/0	---	0/0
C	100.0.0.0/8	Serial1/0	---	0/0	C	192.168.1.0/24	FastEthernet0/0	---	0/0
S	200.200.201.0/24	---	100.0.0.2	1/0	S	200.200.200.0/24	---	100.0.0.1	1/0

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>

ping 200.200.201.1

Pinging 200.200.201.1 with 32 bytes of data:

Request timed out.

Reply from 200.200.201.1: bytes=32 time=14ms TTL=126

Reply from 200.200.201.1: bytes=32 time=17ms TTL=126

Reply from 200.200.201.1: bytes=32 time=14ms TTL=126

Ping statistics for 200.200.201.1:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),

Approximate round trip times in milli-seconds:

Minimum = 14ms, Maximum = 17ms, Average = 15ms

C:\>ping 200.200.201.1

Pinging 200.200.201.1 with 32 bytes of data:

Reply from 200.200.201.1: bytes=32 time=1ms TTL=126

Reply from 200.200.201.1: bytes=32 time=1ms TTL=126

Reply from 200.200.201.1: bytes=32 time=2ms TTL=126

Reply from 200.200.201.1: bytes=32 time=8ms TTL=126

Ping statistics for 200.200.201.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 8ms, Average = 3ms