



CNET Lab 14

Task 1:

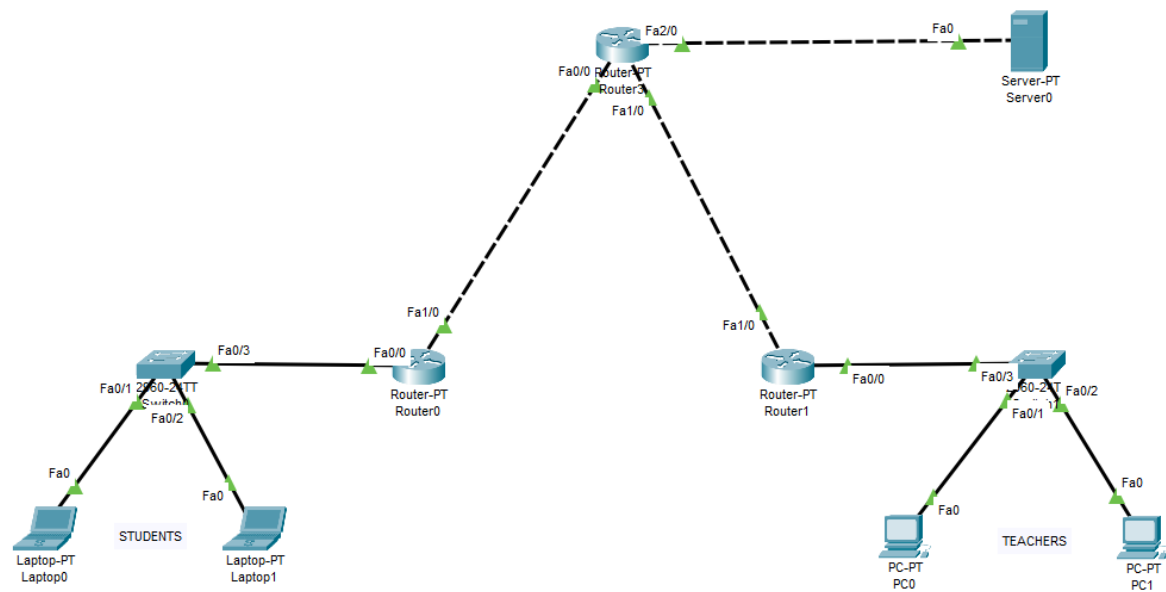

After Static Routing:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	Laptop1	PC0	ICMP		0.000	N	0	(edit)	(delete)
	Successful	Laptop0	PC1	ICMP		0.000	N	1	(edit)	(delete)
	Successful	Laptop1	Server0	ICMP		0.000	N	2	(edit)	(delete)

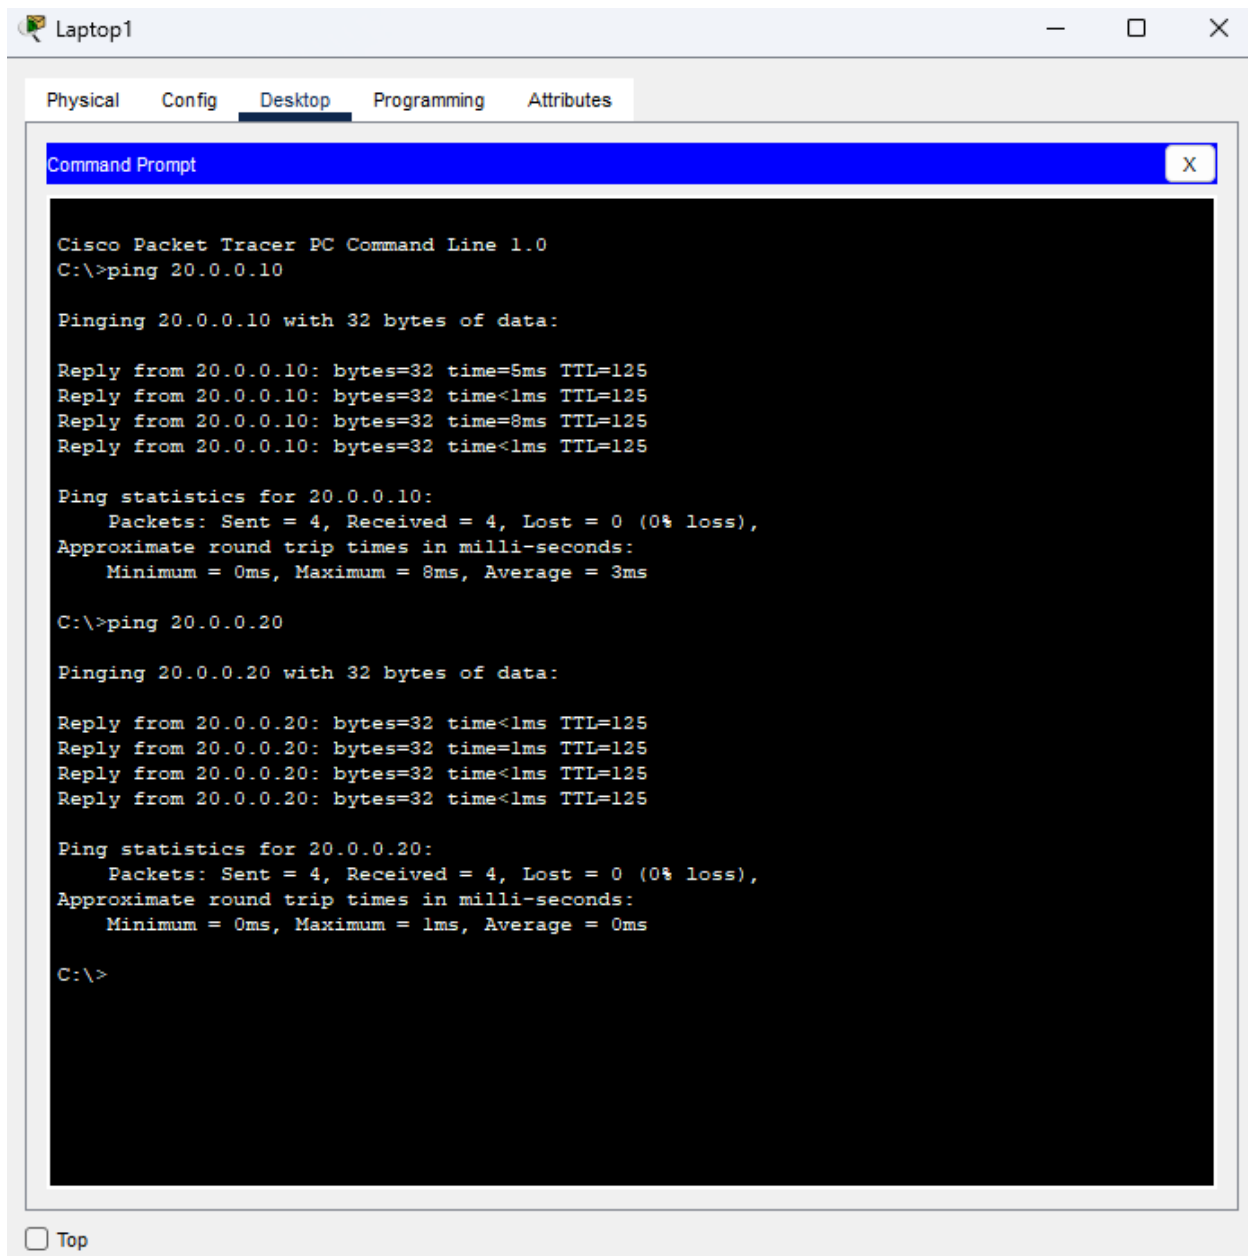

After Blocking Accesses:

Command Prompt

X

```
Reply from 192.168.1.2: Destination host unreachable.  
Reply from 192.168.1.2: Destination host unreachable.  
  
Ping statistics for 30.0.0.10:  
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>clear  
Invalid Command.
```

```
C:\>clrscr  
Invalid Command.
```

```
C:\>ping 30.0.0.10
```

```
Pinging 30.0.0.10 with 32 bytes of data:
```

```
Reply from 192.168.1.2: Destination host unreachable.  
Reply from 192.168.1.2: Destination host unreachable.  
Reply from 192.168.1.2: Destination host unreachable.  
Reply from 192.168.1.2: Destination host unreachable.
```

```
Ping statistics for 30.0.0.10:  
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>ping 20.0.0.10
```


```
Pinging 20.0.0.10 with 32 bytes of data:
```

```
Reply from 20.0.0.10: bytes=32 time=1ms TTL=125  
Reply from 20.0.0.10: bytes=32 time=1ms TTL=125  
Reply from 20.0.0.10: bytes=32 time=1ms TTL=125  
Reply from 20.0.0.10: bytes=32 time<1ms TTL=125
```

```
Ping statistics for 20.0.0.10:  
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\>|
```


Task 2:

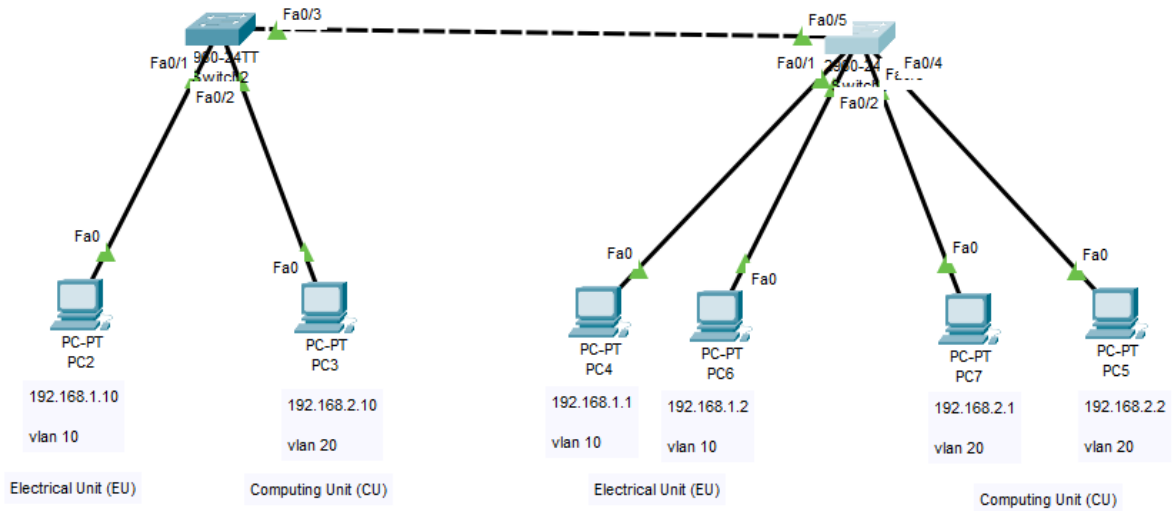

```
Switch(config)#vlan 10
Switch(config-vlan)#EU
^
% Invalid input detected at '^' marker.


Switch(config-vlan)#name EU
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name CU
Switch(config-vlan)#exit
Switch(config)#exit
Switch#
```

```
Switch#config t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fa0/3
Switch(config-if)#exit
Switch(config)#interface fa0/1
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fa0/2
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#exit
Switch#
```

```
Switch(config)#do show vlan
```

VLAN Name	Status	Ports
1 default	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24, Gig0/1 Gig0/2
10 Electrical_Unit	active	Fa0/1, Fa0/2
20 Computing_Unit	active	Fa0/3, Fa0/4
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

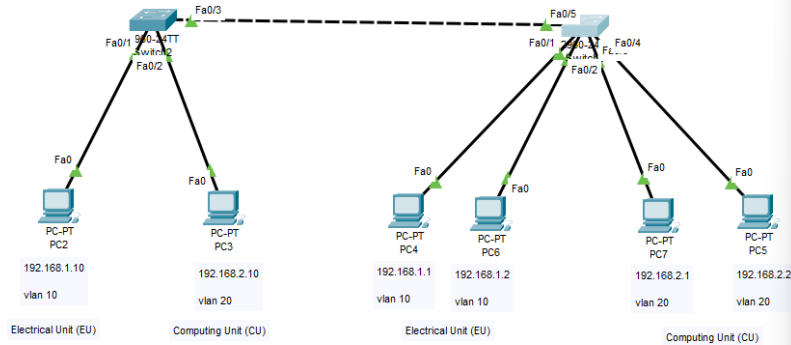

```

PC2

Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 1ms

C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.

```